FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

NEW DUPLEX · 2 DWELLING UNITS · CITY OF IRVINE

200 Sample Way (fictional address), Irvine, CA · Tract 00000 (fictional), Lot 7

PROJECT DATA

Jurisdiction	City of Irvine
Zoning	2.3 Medium Density Residential
Planning action	Master Plan MP-0000-FICT (fictional), approved
Scope of work	New two-story duplex (two-family dwelling), 2 dwelling units, on a vacant lot. No lot split.
Lot area	7,500 SF
Building footprint	2,600 SF
Lot coverage	34.7%
Floor area	Unit A 1,650 SF + Unit B 1,650 SF living; garages 440 SF each
Dwelling units	2
Stories / height	2 stories above grade plane / 38'-0" to top of ridge
Governing code / occupancy	2025 CRC (two-family dwelling, R101.2) · Occupancy R-3 / U (garages)
Construction type	V-B
Fire sprinklers	YES · NFPA 13D throughout (CRC R309), deferred submittal, separate OCFA approval
Parking	4 spaces (2-car enclosed garage per unit)
Setbacks	Front 20'-0" / Side 6'-0" / Rear 8'-0"
Solar PV	4.2 kWdc (2025 Energy Code 150.1(c)14); solar zone shown on A1.0
Fire Hazard Severity Zone	Not in a Fire Hazard Severity Zone (WUI block on T-2: not applicable)

APPLICABLE CODES

- 2025 California Building Code (CBC), Title 24 Part 2
- 2025 California Residential Code (CRC), Title 24 Part 2.5
- 2025 California Electrical Code (CEC), Title 24 Part 3
- 2025 California Mechanical Code (CMC), Title 24 Part 4
- 2025 California Plumbing Code (CPC), Title 24 Part 5
- 2022 California Energy Code, Title 24 Part 6
- 2025 California Fire Code (CFC), Title 24 Part 9
- 2025 California Green Building Standards Code (CALGreen), Title 24 Part 11
- City of Irvine Municipal Code, including local amendments

SHEET INDEX

T-1	Title Sheet 1 of 2: project data, code analysis, sheet index
T-2	Title Sheet 2 of 2: general notes, stormwater, WUI block
A1.0	Site Plan
A2.0	Floor Plans
A3.0	Exterior Elevations and Roof Plan
A4.0	Building Sections and Unit Separation Details
S1.0	Foundation Plan, Framing Plan and Shear Walls
S-CALC	Structural Calculations (cover and summary)
C-1	Precise Grading and Drainage Plan, Erosion and Sediment Control
L-1	Landscape and Irrigation Plan (MWELO)
E1.0	Electrical Plan: underground service, EV-ready, PV
EN-1	Title 24 Part 6 Energy Compliance (CF1R summary)
G-1	CALGreen Mandatory Measures Checklist
FS-1	Fire Sprinkler System: NFPA 13D (deferred submittal to OCFA)

DEFERRED SUBMITTALS

- Fire sprinkler system, NFPA 13D: separate approval through OCFA (FS-1)
- Photovoltaic system 4.2 kWdc

FICTIONAL DESIGN STUDIO

Not a real firm

PROJECT

New Duplex
200 Sample Way (fictional address), Irvine, CA

SHEET

Title Sheet 1 of 2

DATE

11/07/2026

T-1

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

GENERAL NOTES

1. FIRE SPRINKLERS: An NFPA 13D automatic sprinkler system shall be provided throughout per CRC R309 and Irvine local amendment (sprinklers required in all new residential buildings), under separate approval through OCFA. Sprinkler note per Irvine Municipal Code 5-9-401 acknowledged; no height or area increase is used.
2. ROOFING: All new roof coverings shall be Class A (UL 790 / ASTM E108), Irvine local amendment.
3. ELECTRICAL: All outside wiring on private property shall be underground (Irvine local amendment); see A1.0 and E1.0.
4. UNIT SEPARATION: Dwelling units are separated by a 1-hour fire-resistance-rated wall assembly (UL Design U305) per CRC R302.3, continuous from foundation to underside of roof sheathing; see A4.0.
5. EXTERIOR WALLS: No exterior wall or projection is within 5 ft of a property line; no fire-rated exterior walls or opening limits apply (CRC Table R302.1(2), sprinklered).
6. EV CHARGING: Each unit's private garage has an EV-ready 208/240 V 40 A circuit and receptacle per CALGreen 4.106.4.1; see E1.0 and G-1.
7. CONSTRUCTION WASTE: 75% of concrete/asphalt and 65% of other construction and demolition debris shall be diverted; Form 66-122A and approved online Waste Management Plan attached; bond posted before permit.
8. ENERGY: Project complies with the 2025 California Energy Code; CF1R summary on EN-1; PV 4.2 kWdc.

STORM WATER POLLUTION PREVENTION NOTES

City of Irvine standard storm water pollution prevention notes apply (Irvine Municipal Code Title 6, Division 8, Chapter 3). Erosion and sediment control BMPs: perimeter fiber rolls, stabilized construction entrance, covered stockpiles, inlet protection; see C-1.

FIRE HAZARD SEVERITY ZONE / WILDLAND-URBAN INTERFACE (CWUIC Ch. 5, CBC Chapter 7A, CRC R327)

☐ Applies ☒ **Not applicable**: the site is not within a mapped Fire Hazard Severity Zone.

FICTIONAL DESIGN STUDIO

Not a real firm

PROJECT

New Duplex
200 Sample Way (fictional address), Irvine, CA

SHEET

Title Sheet 2 of 2


DATE

11/07/2026

T-2

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

SITE PLAN

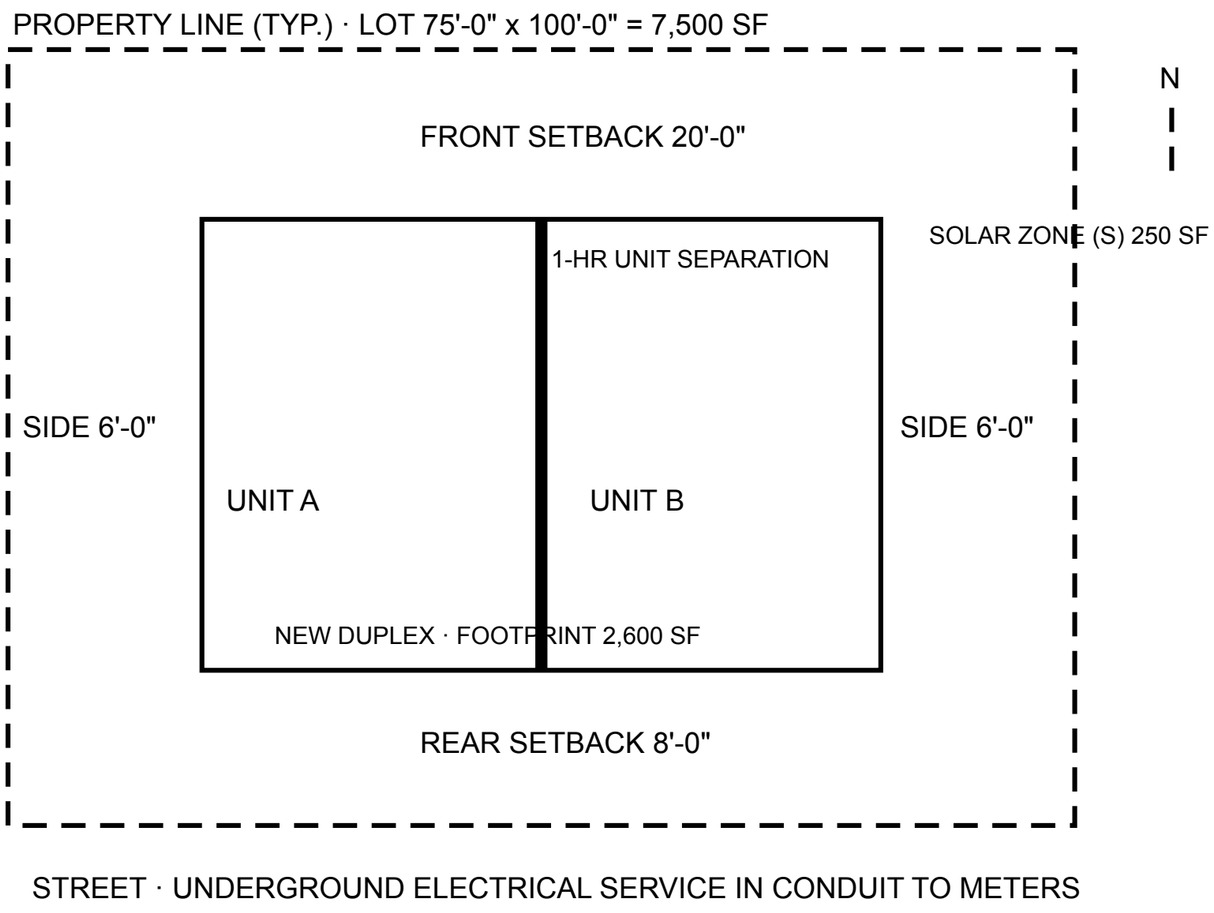

Lot coverage 34.7% (2,600 / 7,500 SF). Density: 2 units on 0.172 ac = 11.6 du/ac. Parking: 4 spaces (2-car enclosed garage per unit). Solar zone orientation from true north shown. Underground electrical service. Distances from all walls and eaves to property lines are 6'-0" or more.

FICTIONAL DESIGN STUDIO
Not a real firm

PROJECT
New Duplex
200 Sample Way (fictional address), Irvine, CA

SHEET
Site Plan

DATE
11/07/2026

A1.0

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

FLOOR PLANS

1-HR RATED UNIT SEPARATION WALL, UL DESIGN U305, CONTINUOUS FOUND

UNIT A · 1,650 SF LIVING	UNIT B · 1,650 SF LIVING
2-CAR GARAGE 440 SF	2-CAR GARAGE 440 SF

Two dwelling units side by side, each with private entrance and separate means of egress. Unit separation wall: 1-hour, UL Design U305.

FICTIONAL DESIGN STUDIO
Not a real firm

PROJECT
New Duplex
200 Sample Way (fictional address), Irvine, CA

SHEET
Floor Plans

DATE
11/07/2026

A2.0

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

EXTERIOR ELEVATIONS AND ROOF PLAN

Overall height 38'-0" to top of ridge, 2 stories above grade plane. Roof: Class A concrete tile (UL 790). Roof slope 4:12. PV array 4.2 kWdc within the solar zone.

FICTIONAL DESIGN STUDIO

Not a real firm

PROJECT

New Duplex
200 Sample Way (fictional address), Irvine, CA

SHEET

Exterior Elevations and Roof Plan

DATE

11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

BUILDING SECTIONS AND DETAILS

Section A: unit separation wall, 1-hour rated (UL Design U305, 2x4 studs, 5/8" Type X gypsum board both sides), continuous from foundation to roof sheathing. Floor/ceiling assemblies are within each unit (no floor between units).

FICTIONAL DESIGN STUDIO

Not a real firm

PROJECT

New Duplex
200 Sample Way (fictional address), Irvine, CA

SHEET

Building Sections and Unit Separation Details

DATE

11/07/2026

A4.0

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

STRUCTURAL: FOUNDATION PLAN, FRAMING PLAN, SHEAR WALL SCHEDULE

Conventional slab-on-grade foundation per soils report SG-0000-FICT. Wood framing; shear walls per schedule. Allowable soil pressure per the soils report.

FICTIONAL DESIGN STUDIO

Not a real firm

PROJECT

New Duplex
200 Sample Way (fictional address), Irvine, CA

SHEET

Foundation Plan, Framing Plan and Shear Walls

DATE

11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

STRUCTURAL CALCULATIONS (COVER AND SUMMARY)

Lateral and gravity calculations prepared to the 2025 CBC/CRC by Sample Structural (fictional). 42 pages on file; summary: wind 95 mph Exposure C, Seismic Design Category D.

FICTIONAL DESIGN STUDIO

Not a real firm

PROJECT

New Duplex
200 Sample Way (fictional address), Irvine, CA

SHEET

Structural Calculations

DATE

11/07/2026

S-CALC

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

PRECISE GRADING AND DRAINAGE PLAN · EROSION AND SEDIMENT CONTROL

Finish grade (FG) and finish surface (FS) elevations; 2% minimum slope away from foundation; drainage to street. Erosion and sediment control BMPs and storm water pollution prevention per T-2.

FICTIONAL DESIGN STUDIO

Not a real firm

PROJECT

New Duplex
200 Sample Way (fictional address), Irvine, CA

SHEET

Precise Grading and Drainage Plan

DATE

11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

LANDSCAPE AND IRRIGATION PLAN

Planting plan and drip irrigation complying with the Model Water Efficient Landscape Ordinance (MWELO).

FICTIONAL DESIGN STUDIO

Not a real firm

PROJECT

New Duplex
200 Sample Way (fictional address), Irvine, CA

SHEET

Landscape and Irrigation Plan

DATE

11/07/2026

L-1

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

ELECTRICAL PLAN

Underground service lateral in conduit to two meters. EV-ready 208/240 V 40 A branch circuit and receptacle in each garage (CALGreen 4.106.4.1). PV system 4.2 kWdc with rapid shutdown.

FICTIONAL DESIGN STUDIO
Not a real firm

PROJECT
New Duplex
200 Sample Way (fictional address), Irvine, CA

SHEET
Electrical Plan

DATE
11/07/2026

E1.0

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

TITLE 24 PART 6 ENERGY COMPLIANCE · CF1R SUMMARY

Performance compliance (CBECC-Res) for 2025 California Energy Code. Climate Zone 8. Required PV 4.2 kWdc. Compliance margin: passes (fictional summary).

FICTIONAL DESIGN STUDIO

Not a real firm

PROJECT

New Duplex
200 Sample Way (fictional address), Irvine, CA

SHEET

Title 24 Energy Compliance

DATE

11/07/2026

EN-1

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

CALGREEN (TITLE 24 PART 11) MANDATORY MEASURES CHECKLIST

Residential mandatory measures checklist completed: 4.106.4.1 EV ready (each private garage), 4.408 construction waste reduction (65% minimum), water-conserving fixtures, indoor air quality measures.

FICTIONAL DESIGN STUDIO
Not a real firm

PROJECT
New Duplex
200 Sample Way (fictional address), Irvine, CA

SHEET
CALGreen Mandatory Measures

DATE
11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

FIRE SPRINKLER SYSTEM · NFPA 13D

NFPA 13D automatic fire sprinkler system throughout both dwelling units per CRC R309. Deferred submittal: shop drawings under separate approval through OCFA.

FICTIONAL DESIGN STUDIO

Not a real firm

PROJECT

New Duplex
200 Sample Way (fictional address), Irvine, CA

SHEET

Fire Sprinkler System

DATE

11/07/2026

FS-1

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

Stand-in for testing; not an official City of Irvine form.

E-Submittal Checklist and Questionnaire (New Residential Models/Production/Condominiums/Apartments)

Project	New duplex, 2 units
Model homes	No
PV panels	Yes, 4.2 kWdc (kW(DC))
Documents included	All documents listed in this package

Prepared by: A. Sample (fictional) · Signed 11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

Stand-in for testing; not an official City of Irvine form.

Electronic/Digital Signature Disclosure

Statement	Applicant agrees electronic signatures on City submittals are legally binding.
Signed	A. Sample (fictional)

Prepared by: A. Sample (fictional) · Signed 11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

Stand-in for testing; not an official City of Irvine form.

Building Permit Application (Form 65-59)

Project address	200 Sample Way (fictional address), Irvine, CA
Tract/lot	Tract 00000 (fictional), Lot 7
Description of work	New two-story duplex, 2 dwelling units
Occupancy group(s)	R-3 / U
Construction type	V-B
Number of stories	2
Sprinklers	Yes, NFPA 13D
Total number of dwelling units	2
Total dwelling sq ft	3,300 SF

Prepared by: A. Sample (fictional) · Signed 11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

Stand-in for testing; not an official City of Irvine form.

Building Data Sheet (Form 66-58)

No. of buildings	1
No. of dwelling units per bldg	2
Stories	2
Occupancy group(s)	R-3 / U
Construction type	V-B
Sprinklers	Yes, NFPA 13D
PV panels / PV system wattage	Yes / 4.2 kWdc

Prepared by: A. Sample (fictional) · Signed 11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

Stand-in for testing; not an official City of Irvine form.

Construction and Demolition Waste Assessment 2.0 (Form 66-122A) and Waste Management Plan

Project type	New residential, subject to recycling/diversion (IMC 6-7-900)
Diversion	75% concrete/asphalt, 65% other debris
Online Waste Management Plan	Submitted and approved (fictional confirmation WMP-0000)
Bond	To be posted at permit issuance

Prepared by: A. Sample (fictional) · Signed 11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

Stand-in for testing; not an official City of Irvine form.

Orange County Fire Authority (OCFA) Plan Submittal Criteria

Q1 New building	Yes, Fire Master Plan PR145 attached
Q5 3+ units and 3+ stories	No
Fire sprinklers	NFPA 13D, deferred submittal
Fire Hazard Severity Zone	No

Prepared by: A. Sample (fictional) · Signed 11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

Stand-in for testing; not an official City of Irvine form.

OCFA Fire Master Plan (PR145), approved

Service request	PR145 (fictional SR-0000)
Status	Approved
Fire access and water supply	Approved as shown

Prepared by: A. Sample (fictional) · Signed 11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

Stand-in for testing; not an official City of Irvine form.

Developer Deposit Case Set Up

Applicant	Sample Builders (fictional)
Deposit account	Set up (fictional account DD-0000)

Prepared by: A. Sample (fictional) · Signed 11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

Stand-in for testing; not an official City of Irvine form.

Area Tabulations

Unit A living	1,650 SQ. FT.
Unit B living	1,650 SQ. FT.
Garages	440 SQ. FT. each
Footprint	2,600 SQ. FT.
Lot	7,500 SQ. FT.

Prepared by: A. Sample (fictional) · Signed 11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

Stand-in for testing; not an official City of Irvine form.

Address Sequence Sheet

Unit A	200 Sample Way, Unit A (fictional)
Unit B	200 Sample Way, Unit B (fictional)

Prepared by: A. Sample (fictional) · Signed 11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

Stand-in for testing; not an official City of Irvine form.

Transportation Corridor Agencies Residential Fee Determination (Form 66-92)

Lot	7
Separate lot	No
Detached	No
Unit sq ft ≥ 1,500 (garage excluded)	Yes, both units
Determination	Per TCA Interpretation 92-1

Prepared by: A. Sample (fictional) · Signed 11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

Stand-in for testing; not an official City of Irvine form.

Water Quality Management Plan (WQMP) (summary)

Project	New duplex
LID BMPs	Downspouts to landscaped areas, permeable driveway strips
Status	Prepared (fictional WQMP-0000)

Prepared by: A. Sample (fictional) · Signed 11/07/2026

FICTIONAL SAMPLE FOR SOFTWARE TESTING ONLY · NOT A REAL PROJECT, PARCEL, PERSON OR FIRM · NOT FOR CONSTRUCTION

Stand-in for testing; not an official City of Irvine form.

Master Plan approval and Conditions of Approval

Planning action / case no.	Master Plan MP-0000-FICT (fictional), approved
Zoning	2.3 Medium Density Residential
Conditions of approval	Incorporated on T-2

Prepared by: A. Sample (fictional) · Signed 11/07/2026