TRIPLEX DWELLING UNIT

OPTION #1

2-BEDROOMS / 2-BATH /COVERED GARAGE
COVERED PORCH AND PATIO

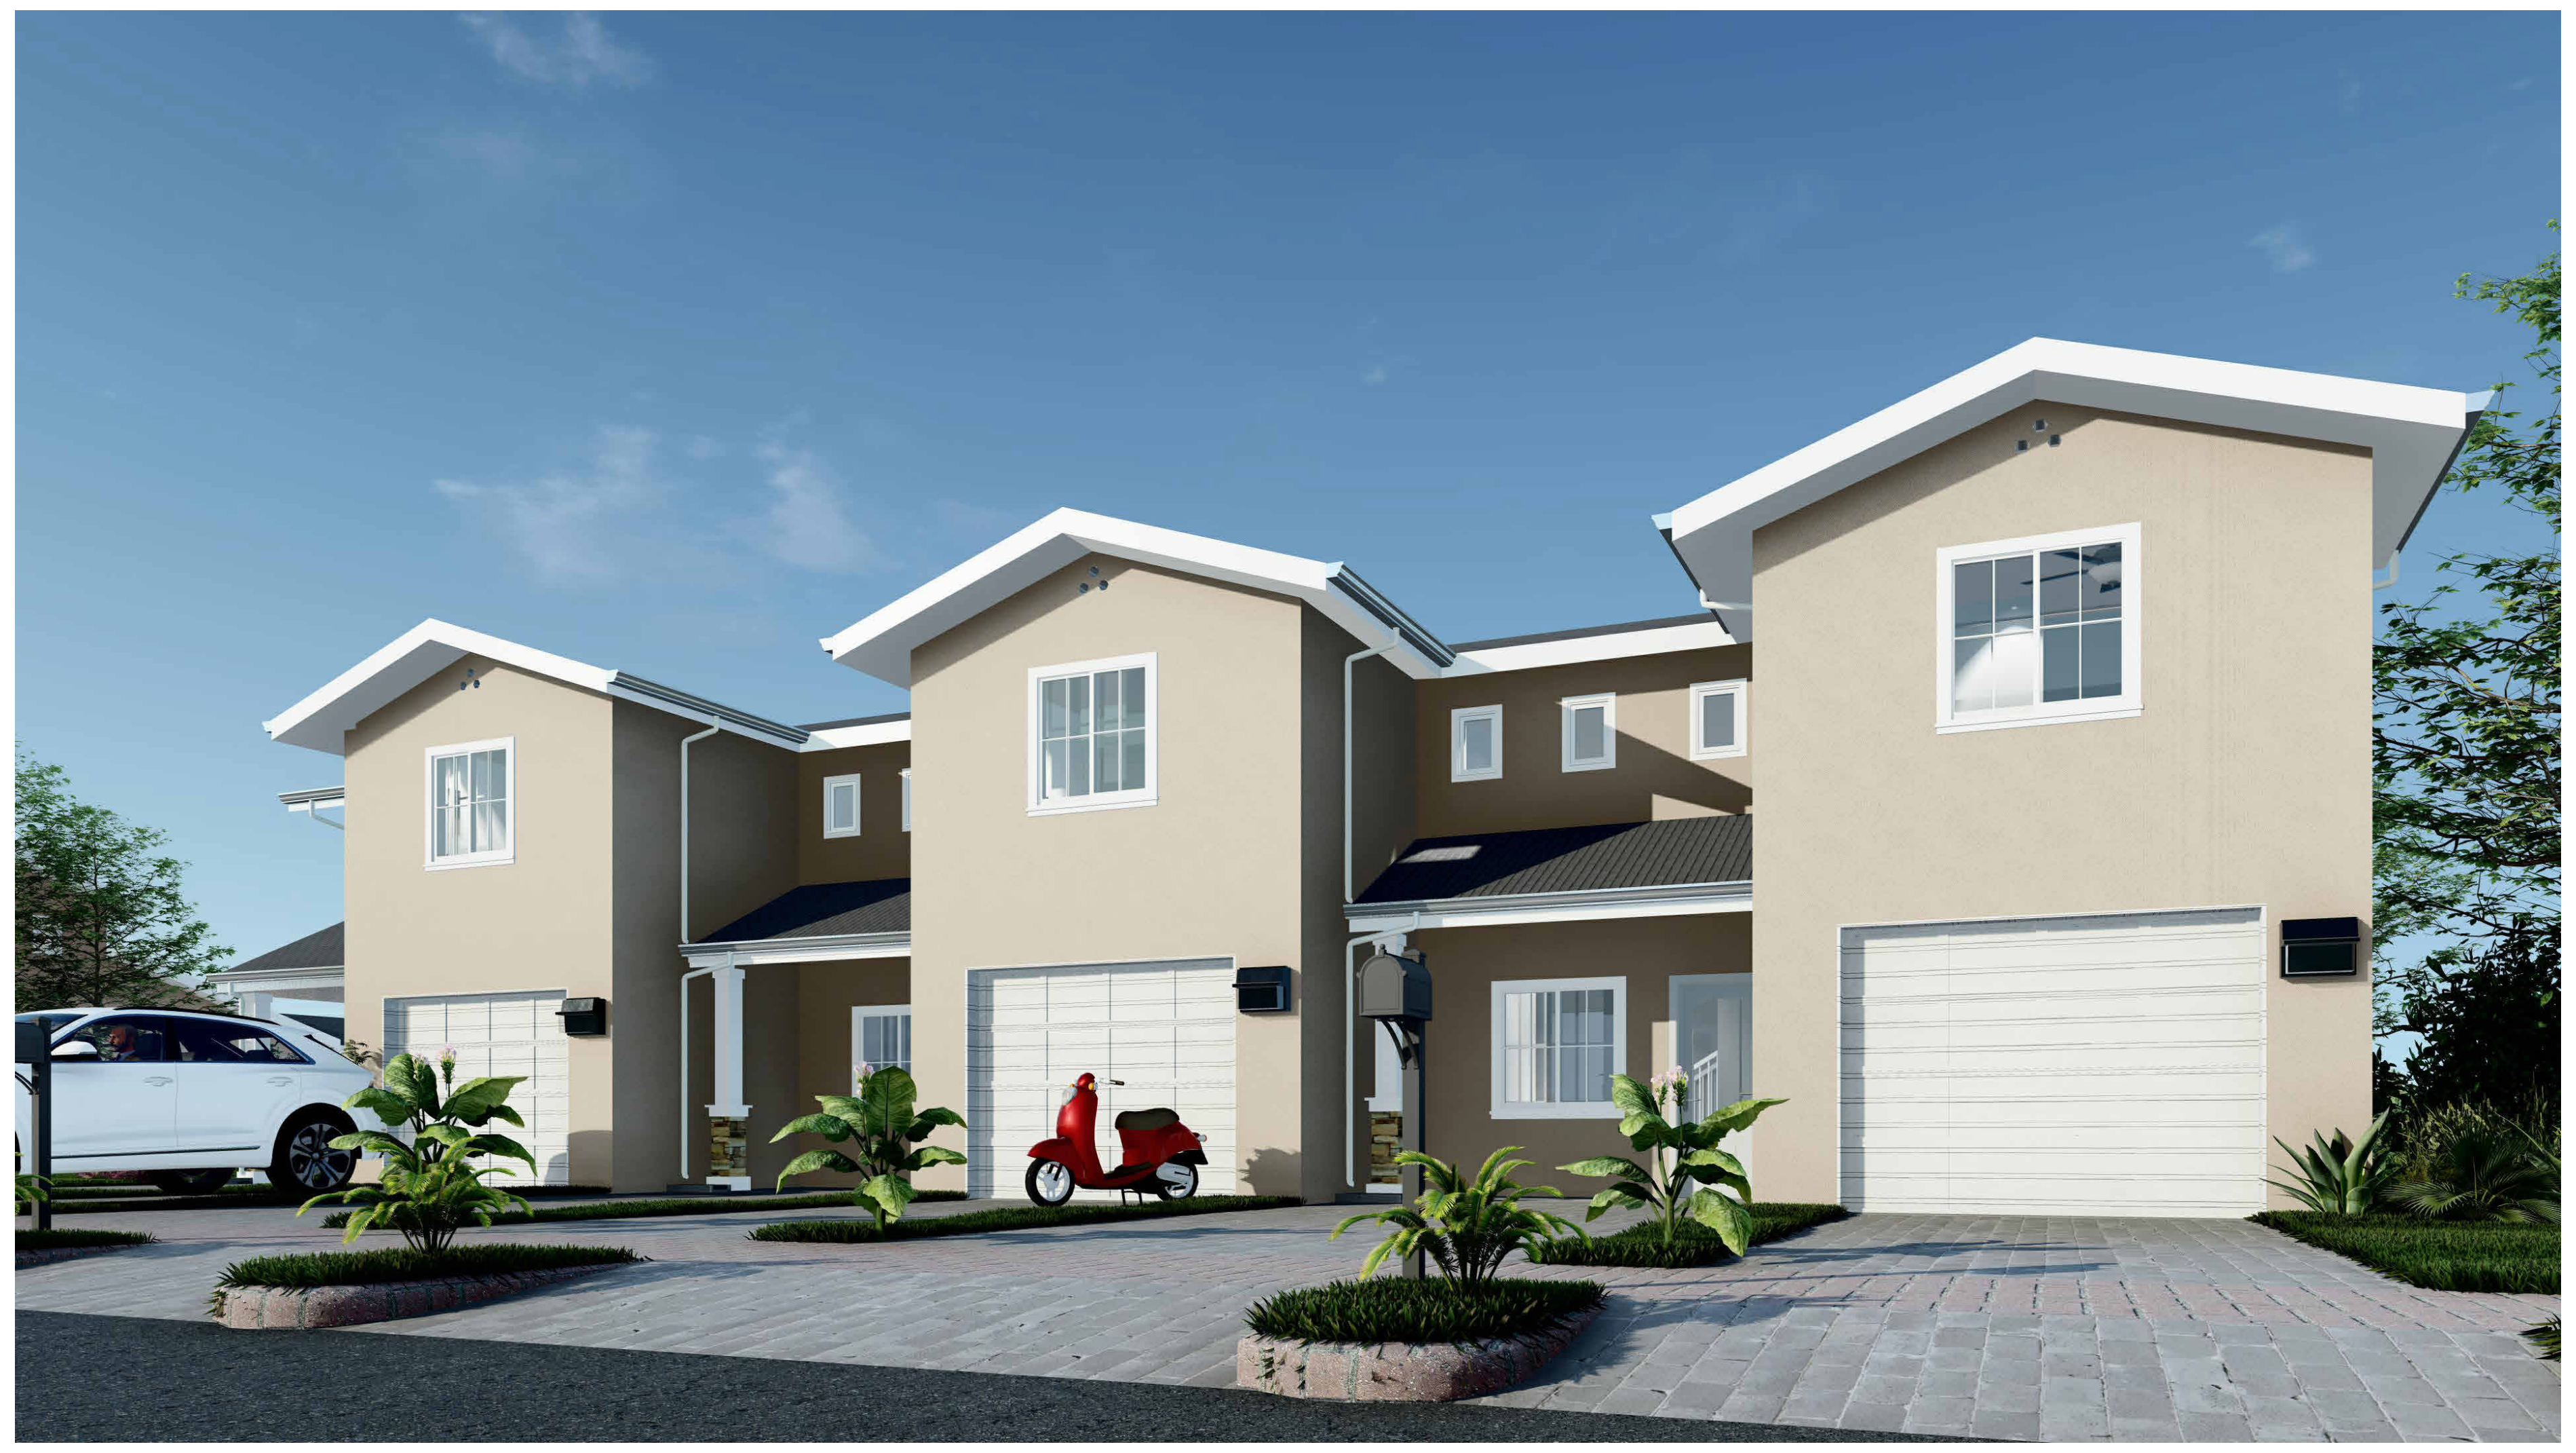

OWNER: ______________________________
ADDRESS: ______________________________
TEL. NO.: ______________________________

PROJECT INFORMATION

PROJECT OF:
THE COUNTY OF FRESNO
DEPARTMENT OF PUBLIC WORKS AND PLANNING

Capital Projects Division
2220 Tulare St., Ste. 720, Fresno, CA. 93721
Phone: (559) 262-4212 Fax: (559) 262-4879

SCOPE OF WORK:
PROPOSED TWO (2) STORY MULTI-FAMILY DWELLING UNIT WITH THREE (3) UNITS TOTAL.

NUMBER OF BEDROOMS / UNIT : TWO (2)
NUMBER OF BATHROOMS: TWO (2)

	SQ. FT. / UNIT	TOTAL PER UNIT	TOTAL SQ. FT.
CONDITIONED SPACE			
FIRST FLOOR	652	999	2,973
SECOND FLOOR	339		
TOTAL CONDITIONED SPACE			
GARAGE		315	945
COVERED PORCH		74	222
COVERED PATIO		98	294
TOTAL		1478	4434

BUILDING DATA:
OCCUPANCY CLASSIFICATION: R2 / U
GROUP USE : (R-2) APARTMENT / (U) GARAGE
TYPE OF CONSTRUCTION: VB
SPRINKLERED: YES

STRUCTURAL DESIGN CRITERIA:
ROOF: DEAD LOAD = 20 PSF
LIVE LOAD = 20 PSF
FLOOR: DEAD LOAD = 12 PSF
LIVE LOAD = 40 PSF
WIND SPEED = 110 MPH (ALLOWABLE STRESS) / EXPOSURE C, LOW-RISE BUILDING
SEISMIC DESIGN CATEGORY: D
SS = 0.557
SDS = 0.56*
Fa = 1.374
SNOW LOAD = NONE
ALLOWABLE SOIL PRESSURE: 1500 PSF PER CBC 2022
CONCRETE DESIGN STRENGTH OF 2500 PSI PER CBC TABLE 1808.8.1.

DEFERRED SUBMITTAL ITEMS

THE OWNER / APPLICANT IS RESPONSIBLE FOR PREPARING DOCUMENTATION, APPLICATIONS, PROCESSING THROUGH THE AUTHORITY HAVING JURISDICTION AND PAYING ALL APPLICABLE FEES FOR THE DEFERRED SUBMITTALS LISTED BELOW. REFER TO "RIGHTS AND LIMITATIONS OF USING PRE-APPROVED PLANS" FOR ADDITIONAL INFORMATION.

1. ROOF TRUSSES
2. FIRE SPRINKLERS
3. SOLAR PV kW PER TITLE 24
   - A. MINIMUM 2.71 KW DC (OPTION 1- UNIT 1)
   - B. MINIMUM 2.67 KW DC (OPTION 1- UNIT 2)
   - C. MINIMUM 2.70 KW DC (OPTION 1- UNIT 3)
4. HVAC DUCTED MINI-SPLIT HEAT PUMP HAVING HEATING EFF. 9 HSPF AND COOLING EFF. 16.85 SEER 11.7 EER. (MODEL - LH248HV4) WITH PERMANENTLY INSTALLED WALL MOUNTED THERMOSTAT @ LIVING ROOM.

REQUIREMENTS

FIRE DEPARTMENT APPROVAL MUST BE OBTAINED. PROVIDE EVIDENCE OF FIRE PROTECTION DISTRICT APPROVAL TO MATTHEW B. LOPEZ, PLANS EXAMINER AT (559) 600-4324 OR E-MAIL,mattlopez@fresnocountyca.gov.

FOR QUESTIONS REGARDING ZONING REQUIREMENTS, CONTACT: ZONING, AT (559) 600-4540 OR E-MAIL: zoningenforcement2 @fresnocountyca.gov

FOR QUESTIONS REGARDING GRADING REQUIREMENTS, CONTACT: DANA RITSCHEL, AT (559) 600-4212 OR EMAIL: dritschel@fresnocountyca.gov

FOR QUESTIONS REGARDING CODE ENFORCEMENT COMMENTS, CONTACT: Elisania Harrison at (559) 600-2519 or e-mail, eharrison@fresnocountyca.gov

DRAWING INDEX

A-100	COVER SHEET
G-101	GENERAL NOTES
G-102	GENERAL NOTES
A-201	PROPOSED FLOOR PLAN
A-202	TYPICAL FLOOR PLAN - ENLARGED VIEWS
A-203	PROPOSED ROOF PLAN
A-301	ELEVATIONS
A-401	BUILDING SECTIONS
A-501	ENLARGED ADAPTABLE KITCHEN & DETAILS
A-502	ADAPTABLE BATHROOM DETAILS
A-601	OPENING SCHEDULES
A-701	STAIR DETAILS
A-801	ARCHITECTURAL DETAILS
A-802	ARCHITECTURAL DETAILS
A-803	ARCHITECTURAL DETAILS
A-804	WALL SIDING TYPICAL DETAILS
A-805	CLOTHES DRYER EXHAUST DETAILS
A-806	TYPICAL FIRESTOP DETAILS
A-807	TYPICAL FIRESTOP DETAILS
A-808	TYPICAL FIRESTOP DETAILS
A-809	TYPICAL FIRESTOP DETAILS
GBC-1	GREEN BUILDING MANDATORY MEASURES 1
GBC-2	GREEN BUILDING MANDATORY MEASURES 2
S-101	TYPICAL WOOD FRAMING DETAILS
S-102	TYPICAL STRUCTURAL DETAILS
S-103	FASTENING SCHEDULE (COMMERCIAL)
S-104	TRUS JOIST STANDARD DETAILS
S-201	FOUNDATION PLAN
S-202	SHEAR WALL PLAN
S-203	GROUND FLOOR ROOF FRAMING PLAN
S-204	SECOND FLOOR ROOF FRAMING PLAN
S-301	STRUCTURAL DETAILS
S-302	STRUCTURAL DETAILS
M001	GN, LEGEND, AND SCHEDULES
M002	MECHANICAL DETAILS
M100	1ST FLOOR MECHANICAL PLAN
M101	2ND FLOOR MECHANICAL PLAN
P001	PLUMBING GN, LEGEND, AND SCHEDULES
P002	PLUMBING DETAILS
P100	1ST FLOOR PLUMBING PLAN
P101	2ND FLOOR PLUMBING PLAN
E-101	ELECTRICAL FLOOR PLAN
T24-1.1	TITLE 24 ENERGY COMPLIANCE
T24-1.2	TITLE 24 ENERGY COMPLIANCE
T24-2.1	TITLE 24 ENERGY COMPLIANCE
T24-2.2	TITLE 24 ENERGY COMPLIANCE
T24-3.1	TITLE 24 ENERGY COMPLIANCE
T24-3.2	TITLE 24 ENERGY COMPLIANCE
MM-1.1	TITLE 24 MANDATORY COMPLIANCE
MM-2.1	TITLE 24 MANDATORY COMPLIANCE
MM-3.1	TITLE 24 MANDATORY COMPLIANCE

8.5" x 11" ATTACHMENTS:
STRUCTURAL ANALYSIS
TITLE 24 DOCUMENTATION

ADDITIONAL REQUIREMENTS

1. STATE LAW REQUIRES THIS PROJECT COMPLY WITH THE CURRENT EDITION OF THE CALIFORNIA FIRE CODE. CONTACT THE FOLLOWING FIRE PROTECTION DISTRICT AND OBTAIN APPROVALS PRIOR TO OBTAINING THE PERMITS FROM THE COUNTY OF FRESNO, VERIFY THE SITE ADDRESS WITH THE CORRECT JURISDICTION BELOW:

   FRESNO COUNTY FIRE PROTECTION DISTRICT
   1700 JENSEN AVENUE SUITE 103
   SANGER, CA. 93657
   PHONE: (559) 319-0400

   CITY OF FRESNO FIRE DEPARTMENT
   911 H ST.
   FRESNO, CA. 93721
   PHONE: (559) 621-4000

   THE COUNTY OF FRESNO
   DEPARTMENT OF PUBLIC WORKS AND PLANNING
   DEVELOPMENT SERVICES
   2220 TULARE ST. STREET LEVEL.
   FRESNO, CA. 93721
   PHONE (559) 600-4219

   NORTH CENTRAL FIRE DEPARTMENT
   15850 W. KEARNEY BLVD.
   KERMAN, CA. 93630
   PHONE (559) 275-5531

   CSA 50 – AUBERRY VOLUNTEER FIRE DEPARTMENT
   PO BOX 191
   AUBERRY, CA. 93602
   559-855-2777

   SHAVER LAKE FIRE DISTRICT
   41795 TOLLHOUSE
   SHAVER LAKE, CA. 93664
   559-841-8136

   ORANGE COVE FIRE DEPARTMENT
   550 CENTER STREET
   ORANGE COVE, CA. 93646
   559-626-7758

2. PROVIDE A COMPLETE SITE PLAN AS PART OF THE PLANS, DRAWN TO SCALE, ON A FULL-SIZE SHEET WITH THE FOLLOWING INFORMATION:
   - A. PROVIDE PROPERTY LINE DIMENSIONS.
   - B. INDICATE A NORTH ARROW.
   - C. DIMENSION DISTANCES TO ALL PROPERTY LINES AND ADJACENT BUILDINGS.
   - D. LOCATE THE FOLLOWING:
     - a. ALL STRUCTURES ON-SITE.
     - b. EASEMENTS AND SETBACKS.
     - c. MECHANICAL OR OTHER GROUND MOUNTED EQUIPMENT.
     - d. LPG TANKS OR GAS METER.
     - e. WELLS OR WATER METERS.
     - f. SEPTIC SYSTEMS (INCLUDING 100% EXPANSION AREA FOR LEACHING FIELD) OR SEWER CONNECTIONS.
     - g. DRIVEWAY (MATERIALS TO BE USED FOR THE DRIVEWAY).
3. PROVIDE A DRAINAGE PLAN FOR THE DEVELOPED PORTION OF THE PROPERTY.
   - A. FOR VALLEY FLOOR (“FLAT” LAND) PARCELS, ADDRESS THE FOLLOWING:
     - A. SHOW THE DRAINAGE AWAY FROM THE PROPOSED CONSTRUCTION. “PROVIDE A TWO PERCENT SLOPE AWAY FROM THE PROPOSED BUILDING FOR A MINIMUM OF FIVE FEET.” [FCOC 15.08.020 O],
     - B. SHOW DRAINAGE PATTERNS TO THE STREET OR AN APPROVED DRAINAGE FACILITY.
     - C. PROVIDE ACTUAL/RELATIVE ELEVATIONS FOR THE BUILDING PAD, LOT CORNERS AND CROWN OF ADJACENT STREETS. “FINISH FLOOR ELEVATION IS TO BE ABOVE THE CROWN OF THE STREET.”
     - D. DELINEATE THE EXTENT OF THE BUILDING PAD WITH DIMENSIONS FROM THE BUILDING TO THE EDGE OF THE PAD.
   - B. FOR ALL FOOTHILL AND MOUNTAIN PARCELS WITH SLOPED GRADES, ADDRESS THE FOLLOWING:
     - A. SHOW THE DRAINAGE AWAY FROM THE PROPOSED CONSTRUCTION. “PROVIDE A TWO PERCENT SLOPE AWAY FROM THE PROPOSED BUILDING FOR A MINIMUM OF FIVE FEET.” [FCOC 15.08.020 O],
     - B. SHOW DRAINAGE PATTERNS TO THE STREET OR AN APPROVED DRAINAGE FACILITY (EXISTING AND PROPOSED CONTOURS) INCLUDING:
       - TERRACING.
       - SWALES.
       - RETAINING WALLS.
       - ROOF RAINWATER RUNOFF. SHOW GUTTERS AND DOWNSPOUT DISCHARGE LOCATIONS.
   - C. DELINEATE THE EXTENT OF THE BUILDING PAD WITH DIMENSIONS FROM THE BUILDING TO THE EDGE OF THE PAD.
   - D. CUT AND FILL AREAS (WITH QUANTITIES IN CUBIC YARDS) ON BOTH PLAN AND SCHEMATIC (SECTION) VIEWS IN BOTH DIRECTIONS.
   - E. DRIVEWAYS AND PRIVATE ROADS SHALL HAVE A MAXIMUM SLOPE OF 12%. THE GRADE MAY BE INCREASED TO A MAXIMUM OF 20% FOR PAVED SURFACES.” [FCOC 15.60.505].

. ADD THE FOLLOWING NOTES ON THE SITE OR DRAINAGE PLANS:
A. “FINISH FLOOR ELEVATION IS TO BE ABOVE THE CROWN OF THE STREET.”
B. “PROVIDE A TWO PERCENT SLOPE AWAY FROM THE PROPOSED BUILDING FOR A MINIMUM OF FIVE FEET.” [FCOC 15.08.020 O].
C. “DRIVEWAYS AND PRIVATE ROADS SHALL HAVE A MAXIMUM SLOPE OF 12%. THE GRADE MAY BE INCREASED TO A MAXIMUM OF 20% FOR PAVED SURFACES.” [FCOC 15.60.505].

APPLICABLE CODE:

2022 CALIFORNIA ADMINISTRATIVE CODE
2022 CALIFORNIA BUILDING CODE
2022 CALIFORNIA PLUMBING CODE
2022 CALIFORNIA MECHANICAL CODE
2022 CALIFORNIA ELECTRICAL CODE
2022 CALIFORNIA FIRE CODE
2022 CALIFORNIA RESIDENTIAL CODE
2022 CALIFORNIA ENERGY CODE
2022 CALIFORNIA GREEN BUILDING CODE
2022 CALIFORNIA REFERENCE STANDARDS CODE
FRESNO COUNTY ORDINANCE TITLE 15

REFER TO G-101, G-102 FOR ADDITIONAL INFORMATION.

GENERAL NOTES:

1. CONSTRUCTION WASTE MANAGEMENT PLAN MUST BE FINALIZED PRIOR TO OCCUPANCY.
2. INSTALL STREET ADDRESS NUMERALS, AT LEAST FOUR INCHES HIGH WITH MINIMUM 1/2-INCH STROKE, MOUNTED ON A CONTRASTING BACKGROUND CLEARLY VISIBLE FROM THE STREET.
3. PRIOR TO PERMIT ISSUANCE, PROVIDE AN ADDITIONAL FLOOR PLAN AND SITE PLAN FOR USE BY THE ASSESSOR'S OFFICE.

RIGHTS AND LIMITATIONS IN USING PRE-APPROVED PLANS

1. RIGHTS OF THE OWNER / BUILDER:
   - A. THE OWNER / BUILDER HAS THE RIGHT TO UTILIZE THE PRE-APPROVED PLANS FOR THEIR INTENDED CONSTRUCTION PROJECT, SUBJECT TO COMPLIANCE WITH APPLICABLE REGULATIONS AND GUIDELINES.
2. RESPONSIBILITY OF THE OWNER / BUILDER:
   - A. THE OWNER / BUILDER IS RESPONSIBLE FOR SUBMITTING ALL ITEMS LISTED UNDER THE DEFERRED SUBMITTAL AS REQUIRED BY THE RELEVANT AUTHORITIES. THIS INCLUDES ANY ADDITIONAL DOCUMENTS, PERMITS, OR INFORMATION THAT WERE NOT INCLUDED IN THE PRE-APPROVED PLANS.
   - B. THE OWNER / BUILDER MUST ENSURE THAT THE CONSTRUCTION PROJECT ADHERES TO ALL RELEVANT BUILDING CODES, ZONING REGULATIONS, AND OTHER APPLICABLE LAWS.
   - C. IT IS THE RESPONSIBILITY OF THE OWNER / BUILDER TO SECURE APPROVAL FROM THE ZONING DEPARTMENT FOR SITE-SPECIFIC LOCATIONS. THE PRE-APPROVED PLANS DO NOT INCLUDE SUCH SITE-SPECIFIC DETAILS, AND THE OWNER / BUILDER MUST OBTAIN NECESSARY PERMITS OR VARIANCES AS REQUIRED.
3. LIMITATIONS ON SITE-SPECIFIC LOCATIONS:
   - A. THE PRE-APPROVED PLANS DO NOT PROVIDE SITE-SPECIFIC INFORMATION OR DETAILS REGARDING THE CONSTRUCTION SITE. THE OWNER / BUILDER MUST CONSULT WITH THE APPROPRIATE AUTHORITIES, SUCH AS THE ZONING DEPARTMENT, TO OBTAIN THE NECESSARY APPROVALS FOR THE SPECIFIC LOCATION OF THE CONSTRUCTION PROJECT.
   - B. THE OWNER / BUILDER MUST COMPLY WITH ALL ZONING REGULATIONS, SETBACK REQUIREMENTS, ENVIRONMENTAL CONSIDERATIONS, AND ANY OTHER SITE-SPECIFIC RESTRICTIONS IMPOSED BY THE RELEVANT AUTHORITIES.
4. COMPLIANCE WITH BUILDING CODES AND REGULATIONS:
   - A. THE OWNER / BUILDER MUST ENSURE THAT THE CONSTRUCTION PROJECT COMPLIES WITH ALL APPLICABLE BUILDING CODES, REGULATIONS, AND STANDARDS, EVEN IF THE PRE-APPROVED PLANS WERE UTILIZED.
   - B. THE USE OF PRE-APPROVED PLANS DOES NOT EXEMPT THE OWNER / BUILDER FROM FULFILLING THEIR OBLIGATIONS TO OBTAIN ALL NECESSARY PERMITS AND APPROVALS AS REQUIRED BY LOCAL, STATE, AND FEDERAL REGULATIONS.
5. LIABILITY AND INDEMNIFICATION:
   - A. THE OWNER / BUILDER ASSUMES ALL LIABILITY AND RESPONSIBILITY FOR THE CONSTRUCTION PROJECT, INCLUDING ANY CONSEQUENCES ARISING FROM THE USE OF THE PRE-APPROVED PLANS.
   - B. THE OWNER / BUILDER AGREES TO INDEMNIFY AND HOLD HARMLESS THE RELEVANT AUTHORITIES, ARCHITECTS, ENGINEERS, AND ANY OTHER PARTIES INVOLVED IN THE APPROVAL PROCESS, FROM ANY CLAIMS, DAMAGES, OR LIABILITIES ARISING OUT OF THE USE OF THE PRE-APPROVED PLANS OR THE CONSTRUCTION PROJECT.
6. GEOGRAPHIC LIMITATIONS:
   - A. THE PRE-APPROVED PLANS ARE NOT INTENDED FOR AREAS SUBJECT TO SNOW LOAD, WILDFIRE RISK, FLOOD ZONES, OR OTHER SPECIFIC GEOGRAPHIC CONDITIONS.
   - B. THE OWNER / BUILDER ACKNOWLEDGES AND UNDERSTANDS THAT THE PRE-APPROVED PLANS MAY NOT ACCOUNT FOR UNIQUE SITE CONDITIONS.
7. SITE-SPECIFIC CONSIDERATIONS:
   - A. THE OWNER / BUILDER MUST ASSESS AND ADDRESS ANY SITE-SPECIFIC FACTORS THAT ARE NOT COVERED BY THE PRE-APPROVED PLANS, INCLUDING BUT NOT LIMITED TO SOIL CONDITIONS, TOPOGRAPHY, DRAINAGE, AND OTHER ENVIRONMENTAL CONSIDERATIONS.
   - B. IT IS THE RESPONSIBILITY OF THE OWNER / BUILDER TO ENGAGE THE NECESSARY PROFESSIONALS, SUCH AS GEOTECHNICAL ENGINEERS OR ENVIRONMENTAL CONSULTANTS, TO EVALUATE AND MITIGATE ANY SITE-SPECIFIC RISKS OR CHALLENGES.
8. COMPLIANCE WITH LOCAL REGULATIONS:
   - A. THE OWNER / BUILDER MUST COMPLY WITH ALL LOCAL, STATE, AND FEDERAL REGULATIONS THAT APPLY TO THEIR SPECIFIC GEOGRAPHIC AREA, INCLUDING BUT NOT LIMITED TO BUILDING CODES, ZONING ORDINANCES, FIRE CODES, AND ENVIRONMENTAL REGULATIONS.
   - B. THE USE OF THE PRE-APPROVED PLANS DOES NOT EXEMPT THE OWNER / BUILDER FROM FULFILLING THEIR OBLIGATIONS TO ADHERE TO THESE LOCAL REGULATIONS AND OBTAIN ANY NECESSARY PERMITS OR APPROVALS.
9. MODIFICATION RESTRICTIONS:
   - A. THE OWNER / BUILDER SHOULD BE AWARE THAT MODIFICATIONS TO THE PRE-APPROVED PLANS MAY BE REQUIRED TO ADDRESS SPECIFIC SITE CONDITIONS OR MEET LOCAL REGULATIONS. ANY SUCH MODIFICATIONS MUST BE CARRIED OUT IN COMPLIANCE WITH THE APPLICABLE LAWS AND REGULATIONS.
   - B. THE OWNER / BUILDER MAY NEED TO ENGAGE DESIGN PROFESSIONALS, SUCH AS ARCHITECTS OR ENGINEERS, TO REVIEW AND REVISE THE PRE-APPROVED PLANS AS NECESSARY TO ENSURE COMPLIANCE WITH LOCAL REQUIREMENTS.
10. RELIANCE AND VERIFICATION:
    - A. THE OWNER / BUILDER ACKNOWLEDGES THAT THE USE OF PRE-APPROVED PLANS IS BASED ON THE ASSUMPTION THAT THEY ARE ACCURATE, COMPLETE, AND COMPLIANT WITH RELEVANT REGULATIONS.
    - B. HOWEVER, THE OWNER / BUILDER ALSO UNDERSTANDS THAT IT IS THEIR RESPONSIBILITY TO VERIFY THE SUITABILITY AND APPLICABILITY OF THE PRE-APPROVED PLANS FOR THEIR SPECIFIC PROJECT AND SITE CONDITIONS. THEY SHOULD EXERCISE DUE DILIGENCE IN CONFIRMING THE PLANS' ADEQUACY BEFORE PROCEEDING WITH CONSTRUCTION.

TRIPLEX DWELLING UNIT

OPTION #1

PROJECT
TRIPLEX
DWELLING UNIT

PWP23-005

DEPARTMENT OF PUBLIC WORKS AND PLANNING

CAPITAL PROJECTS DIVISION
2220 Tulare St., Ste. 720, Fresno, CA. 93721
Phone: (559) 262-4212 Fax: (559) 262-4879

SEAL & SIGNATURE
LICENSED ARCHITECT
ROBINA R. WRIGHT
NO. C-32283
RENEWAL DATE
06/30/2025
STATE OF CALIFORNIA

UPDATE
MARCH 5, 2024

TITLE
COVER SHEET

SCALE: As indicated

A-100

ISSUE DATE: MARCH 28, 2023
JOB NUMBER: 2023_12
DRAWN BY: Author
CHECKED BY: Checker

©

GENERAL NOTES

1. SCOPE OF WORK SHALL BE CONSTRUCTED ACCORDING TO THESE WORKING DRAWINGS AS AGREED UPON BETWEEN OWNER AND CONTRACTOR. THE WORD "CONTRACTOR" REFERS TO THE GENERAL CONTRACTOR. "SUBCONTRACTOR" REFERS TO ONE HAVING DIRECT CONTACT WITH THE CONTRACTOR.

2. CONTRACTOR'S RESPONSIBILITIES:
   - A. CONTRACTOR AND SUBCONTRACTORS SHALL VISIT THE JOB SITE BEFORE THEIR BID IS SUBMITTED TO FAMILIARIZE THEMSELVES WITH EXISTING CONDITIONS.
   - B. THE GENERAL CONTRACTOR SHALL READ, EXAMINE AND BE THOROUGHLY FAMILIAR WITH THESE DRAWINGS AND WITH THE EXISTING SITE CONDITIONS PRIOR TO THE START OF WORK. IN THE EVENT THERE ARE DISCREPANCIES OR OMISSIONS WITHIN THE DRAWINGS AND/OR SPECIFICATIONS, THE GENERAL CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY.
   - C. CONTRACTOR SHALL INVESTIGATE SITE DURING CLEARING AND EARTHWORK OPERATIONS FOR FILLED EXCAVATIONS OR BURIED STRUCTURES SUCH AS CESSPOOLS, CISTERNS, FOUNDATION, ETC., AND BURIED ARTIFACTS SUCH AS INDIAN OR DINOSAUR BONES. IF ANY SUCH ITEMS ARE FOUND THE ARCHITECT, CIVIL ENGINEER, AND SOILS ENGINEER SHALL BE NOTIFIED IMMEDIATELY.
   - D. NO DRAWINGS, DETAILS, NOTES ETC., SHALL BE INTERPRETED TO ALLOW FOR A VIOLATION OF THE LOCAL BUILDING CODE, STATE BUILDING CODE AND OTHER APPLICABLE CODES AND GOOD CONSTRUCTION PRACTICES.
   - E. THE GENERAL CONTRACTOR SHALL REVIEW ALL GRADE ELEVATIONS PRIOR TO CONSTRUCTION.
   - F. CONTRACTORS SHALL VERIFY ALL DIMENSIONS, CONSTRUCTION METHODS, MATERIALS, SIZE OF MEMBERS, ETC., PRIOR TO ON-SITE DELIVERY.
   - G. CONTRACTOR SHALL TAKE ALL NECESSARY MEASURES TO FULLY PROTECT ADJACENT PROPERTIES.
   - H. JOB SHALL BE COMPLETED WITH AS MUCH SPEED AS POSSIBLE WHEN WORK BEGINS.
   - I. INSPECTIONS: THE CONTRACTOR SHALL OBTAIN ALL REQUIRED INSPECTIONS FOR HIS WORK AND GIVE THE OWNER TIMELY NOTICE OF HIS INTENT TO HAVE INSPECTION.
   - J. THE GENERAL CONTRACTOR SHALL COORDINATE AND VERIFY WITH THE PLUMBING, MECHANICAL AND ELECTRICAL CONTRACTORS, THE SIZE AND LOCATION OF ALL PIPING, DUCTWORK, TRENCHES, SLEEVES, SPECIAL BOLTING FOR EQUIPMENT CONDUITS, ETC..
   - K. THE DESIGN, ADEQUACY AND SAFETY OF ERECTION, BRACING, SHORING, TEMPORARY SUPPORTS, ETC., IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR, AND HAS NOT BEEN CONSIDERED BY THE STRUCTURAL ENGINEER AND ARCHITECT.
   - L. THE CONTRACTOR SHALL PROVIDE ALL RISK INSURANCE. REFER TO PROJECT MANUAL FOR MINIMUM LIABILITY AND PROJECT DAMAGE COVERAGE.
   - M. THE GENERAL CONTRACTOR SHALL PROVIDE AND MAINTAIN TEMPORARY SANITARY FACILITY ENCLOSURES. LOCATE AS DIRECTED BY OWNER.
   - N. THE GENERAL CONTRACTOR AND ALL SUBCONTRACTORS SHALL COMPLY WITH ALL APPLICABLE LAWS AND CODE REGULATIONS.
   - O. CONTRACTOR SHALL TAKE FIELD MEASUREMENTS, VERIFY FIELD CONDITIONS, AND CAREFULLY COMPARE WITH THE CONSTRUCTION DOCUMENTS SUCH FIELD MEASUREMENTS, CONDITIONS, AND OTHER INFORMATION KNOWN TO CONTRACTOR BEFORE COMMENCING THE WORK. ERRORS, INCONSISTENCIES, OR OMISSIONS DISCOVERED AT ANY TIME SHALL BE PROMPTLY REPORTED IN WRITING TO THE OWNER / BUILDER.
   - P. CONTRACTOR SHALL PROMPTLY NOTIFY OWNER'S REPRESENTATIVE IF CONTRACTOR BECOMES AWARE DURING THE PERFORMANCE OF THE WORK THAT THE CONSTRUCTION DOCUMENTS ARE NOT IN COMPLIANCE WITH APPLICABLE CODE REQUIREMENTS.
   - Q. BY SUBMITTAL OF BID, CONTRACTOR WARRANTS TO OWNER / BUILDER THAT ALL MATERIALS AND EQUIPMENT TO BE FURNISHED ARE NEW UNLESS NOTED OTHERWISE AND ALL WORK WILL BE OF GOOD QUALITY AND FREE FROM FAULTS AND DEFECTS.
   - R. SUBCONTRACTORS SHALL INSURE THAT ALL WORK IS DONE IN A PROFESSIONAL WORKMANLIKE MANNER BY SKILLED MECHANICS AND SHALL BE REPLACE ANY MATERIALS OR ITEMS DAMAGED BY SUB-CONTRACTOR'S PERFORMANCE. SUBCONTRACTORS AND SUPPLIERS ARE HEREBY NOTIFIED THAT THEY ARE TO CONFER AND COOPERATE FULLY WITH EACH OTHER DURING THE COURSE OF CONSTRUCTION TO DETERMINE THE EXACT EXTENT AND OVERLAP OF EACH OTHER'S WORK AND TO SUCCESSFULLY COMPLETE THE EXECUTION OF THE WORK. ALL SUBCONTRACTOR WORKMANSHIP SHALL BE OF QUALITY TO PASS INSPECTIONS BY LOCAL AUTHORITIES, LENDING INSTITUTIONS, ARCHITECT OR BUILDER. ANY ONE OR ALL OF THE ABOVE MENTIONED INSPECTORS MAY INSPECT WORKMANSHIP AT ANY TIME, AND CORRECTIONS NEEDED TO ENHANCE THE QUALITY OF BUILDING WILL BE DONE IMMEDIATELY. EACH SUBCONTRACTOR, UNLESS SPECIFICALLY EXEMPTED BY THE TERMS OF HIS / HERS SUBCONTRACT AGREEMENT, SHALL BE RESPONSIBLE FOR CLEANING UP AND REMOVING FROM THE JOB SITE ALL TRASH AND DEBRIS NOT LEFT BY OTHER SUBCONTRACTORS. OWNER / BUILDER WILL DETERMINE HOW SOON AFTER SUBCONTRACTOR COMPLETES EACH PHASE OF HIS / HER WORK THAT TRASH AND DEBRIS WILL BE REMOVED FROM THE SITE.
   - S. APPROVAL BY THE BUILDING INSPECTOR DOES NOT MEAN APPROVAL OR ALLOWABLE FAILURE TO COMPLY WITH THE PLANS AND SPECIFICATIONS. ANY DESIGN WHICH FAILS TO BE CLEAR OR IS AMBIGUOUS MUST BE REFERRED TO THE ARCHITECT OR ENGINEER FOR INTERPRETATION OR CLARIFICATION.
   - T. ALL EQUIPMENT AND MATERIALS FURNISHED AND INSTALLED UNDER THESE PLANS SHALL BE GUARANTEED BY THE CONTRACTOR FOR A PERIOD OF ONE YEAR FROM THE DATE OF ACCEPTANCE OF THE WORK BY OWNER / BUILDER UNLESS STIPULATED OTHERWISE.
   - U. ALL TRADE NAMES AND BRAND NAMES CONTAINED HEREIN ESTABLISH QUALITY STANDARDS. SUBSTITUTIONS ARE PERMITTED, WITH PRIOR APPROVAL B THE OWNER'S REPRESENTATIVE. THE CONTRACTOR SHALL SUBMIT FOR THE ARCHITECT'S AND BUILDERS APPROVAL ALL MATERIALS OR EQUIPMENT WHICH IS CONSIDERED "OR EQUAL" TO THAT SPECIFIED.
   - V. CONSTRUCTION DOCUMENTS IDENTIFIED A "NOT FOR CONSTRUCTION" WATERMARK ON ANY OR ALL SHEETS MAY BE SUBJECT TO REVIEW. THIS REVIEW MAY RESULT IN CHANGES WHICH MAY BE MADE TO THE PLANS PRIOR TO THE ISSUANCE OF THE FINAL CONSTRUCTION SET WHICH WILL CONTAIN NO WATERMARK DESIGNATIONS. CONSTRUCTION DOCUMENTS IDENTIFIED WITH A WATERMARK ARE NOT TO BE CONSTRUED AS BEING THE COMPLETED OR FINAL DRAWINGS AND THEY SHOULD NOT IN ANY WAY BE USED AS SUCH.
   - W. ALL STANDARD NOTES CONTAINED HEREIN ARE TYPICAL UNLESS NOTED OTHERWISE
   - X. TYPICAL DETAILS AND SPECIFICATIONS ARE MINIMUM REQUIREMENTS TO BE USED WHEN CONDITIONS ARE NOT SHOWN OTHERWISE.
     SPECIFIC NOTES AND DETAILS ON DRAWINGS SHALL TAKE PRECEDENCE OVER GENERAL NOTES AND TYPICAL DETAILS. WHERE NO DETAILS ARE SHOWN CONSTRUCTION SHALL CONFORM TO SIMILAR WORK ON THE PROJECT.
   - Y. THE CONSTRUCTION DOCUMENTS AND ALL COPIES THEREOF FURNISHED TO CONTRACTOR ARE THE PROPERTY OF THE COUNTY AND ARE NOT TO BE USED ON OTHER WORK.

3. ERRORS AND OMISSION: IF ANY ERRORS OR OMISSIONS APPEAR IN THESE DRAWINGS, OR OTHER CONTRACT DOCUMENTS, THE GENERAL CONTRACTOR AND SUBCONTRACTORS AFFECTED SHALL NOTIFY THE OWNER / BUILDER IN WRITING OF SUCH ERROR OR OMISSION. IN THE EVENT OF FAILING TO GIVE SUCH WRITTEN NOTICE BEFORE CONSTRUCTION AND/OR FABRICATION OF THE WORK, HE WILL BE HELD RESPONSIBLE FOR THE RESULT OF THE ANY SUCH ERRORS OR OMISSIONS AND THE COST FOR RECTIFYING THE SAME.

4. GUARANTEES: CONTRACTOR SHALL GUARANTEE THE WORK IN GENERAL FOR ONE YEAR AGAINST DEFECTS IN MATERIALS AND WORKMANSHIP. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR LEAVING THE BUILDING FREE FROM DEFECTS OF MATERIALS AND POOR WORKMANSHIP FROM DATE OF COMPLETION. THE CONTRACTOR SHALL FURNISHED A WRITTEN GUARANTEE STATING THAT ALL WORK EXECUTED BY HIM WILL BE FREE FROM DEFECTS OF THE MATERIALS AND WORKMANSHIP FOR A PERIOD OF ONE YEAR (UNLESS OTHERWISE SPECIFIED) FROM DATE OF ACCEPTANCE OF HIS WORK, THAT HE WILL REPAIR AND REPLACE ALL SUCH DEFECTIVE WORK AND ALL OTHER WORK DAMAGE WITHOUT COST TO THE OWNER.

5. ASSURING THAT PLANS ARE BEING FOLLOWED, IT DOES NOT RELIEVE THE CONTRACTOR OR ANY SUBCONTRACTORS FROM ANY RESPONSIBILITY FOR WORK WHICH MAY PROVE FAULTY.

6. JOB CONDITIONS:
   - A. DUST CONTROL: USE ALL MEANS NECESSARY TO PREVENT THE SPREAD OF DUST DURING THE PERFORMANCE OF SITE WORK. THOROUGHLY MOISTEN ALL EXTERIOR SURFACES AS REQUIRED TO PREVENT DUST FROM BEING A NUISANCE TO THE PUBLIC, NEIGHBORS AND CONCURRENT PERFORMANCE OF OTHER WORK ON THE SITE.
   - B. PROTECTION: USE ALL MEANS NECESSARY TO PROTECT EXISTING OBJECTS TO REMAIN AND IN THE EVENT OF DAMAGE, IMMEDIATELY MAKE ALL REPAIRS AND REPLACEMENTS NECESSARY TO THE SATISFACTION OF THE ARCHITECT AND AT NO ADDITIONAL COST TO THE OWNER.

7. PREPARATION:
   - A. CONTRACTOR SHALL INVESTIGATE SITE DURING CLEARING AND EARTHWORK OPERATIONS FOR FILLED EXCAVATIONS OR BURIED STRUCTURES SUCH AS CESSPOOLS, CISTERNS, FOUNDATION, ETC., AND BURIED ARTIFACTS SUCH AS INDIAN OR DINOSAUR BONES. IF ANY SUCH ITEMS ARE FOUND THE ARCHITECT, CIVIL ENGINEER, AND SOILS ENGINEER SHALL BE NOTIFIED IMMEDIATELY.
   - B. NOTIFICATION: THE CONTRACTOR SHALL INFORM THE OWNER AND ARCHITECT OF THE DATE FOR START OF SITE WORK. THE DATE SHALL BE ACCEPTABLE TO ALL PARTIES.
   - C. SITE INSPECTION:
     - PRIOR TO ANY DEMOLITION, CAREFULLY INSPECT THE ENTIRE SITE & ALL OBJECTS DESIGNATED TO BE REMOVED & TO REMAIN.
     - LOCATE ALL EXISTING UTILITY LINES AND EQUIPMENT. DETERMINE WHICH UTILITIES MUST BE REMOVED AND WHICH ARE TO REMAIN AS WELL AS ALL REQUIREMENTS FOR DISCONNECTING OR CAPPING.
   - D. PROTECTIVE WORKS:
     - DEMOLITION SHALL NOT PROCEED UNTIL SUCH PROTECTIVE WORKS ARE PLACED AS ARE REQUIRED TO PROTECT THE PROPERTY AND PERSONNEL FROM THAT HAZARDS OF THE WORK.
     - LOCATE ALL EXISTING UTILITY LINES AND EQUIPMENT. DETERMINE WHICH UTILITIES MUST BE REMOVED AND WHICH ARE TO REMAIN AS WELL AS ALL REQUIREMENTS FOR DISCONNECTING OR CAPPING.
   - E. DAMAGE TO EXISTING WORK: EXISTING WORK DAMAGE IN THAT EXECUTION OF THIS WORK SHALL BE REPAIRED OR RESTORED TO THE ORIGINAL CONDITION AT THE CONTRACTOR'S EXPENSE.

8. DISCONNECTION OF UTILITIES:
   BEFORE STARTING JOB OPERATIONS, DISCONNECT OR ARRANGE FOR THE DISCONNECTION OF ALL UTILITIES TO BE REMOVED, PERFORMING ALL SUCH WORK IN ACCORDANCE WITH THE REQUIREMENTS OF THE UTILITY COMPANY OR AGENCY INVOLVED, AND WITH OWNER.

9. PROTECTION OF UTILITIES:
   - PRESERVE IN OPERATING CONDITION ALL ACTIVE UTILITIES REMAINING.
10. USE OF THE PREMISES: THE CONTRACTOR SHALL CONFINE HIS WORKMEN, AND THE PARKING OF WORKMEN'S VEHICLES TO LIMITS INDICATED BY LAW, ORDINANCE, PERMITS OR DIRECTION OF THE OWNER.
11. MATERIALS AND EMPLOYEES: UNLESS OTHERWISE DIRECTED BY THE OWNER, THE CONTRACTOR AND/OR SUBCONTRACTOR SHALL PROVIDE AND PAY FOR ALL MATERIALS, LABOR, TOOLS, EQUIPMENT, TELEPHONE, AND GAS TRANSPORTATION. MATERIALS SHALL BE OF GOOD QUALITY.
12. CLEANING UP: THE CONTRACTOR AND SUBCONTRACTORS SHALL AT ALL TIMES KEEP THE PREMISES FREE OF ACCUMULATIONS OF WASTE MATERIALS AND RUBBISH CAUSED BY HIS EMPLOYEES AND WORK. AT THE
13. COMPLETION OF THE WORK, HE SHALL REMOVE ALL HIS RUBBISH, ALL OF HIS TOOLS, SCAFFOLDING AND SURPLUS MATERIALS FROM AND ABOUT THE BUILDING AND SHALL LEAVE HIS WORK IN A BROOM CLEAN CONDITION. THE SITE AND BUILDING AREA SHALL BE KEPT CLEAN AND PICKED UP OF DEBRIS AND SCRAPS AT ALL TIMES DURING CONSTRUCTION, PARTICULARLY AT THE END OF EACH WORK WEEK. THE CONTRACTOR SHALL INSURE THAT ALL GLASSES, TILES, TOILET FIXTURES, EQUIPMENT, PAINTED SURFACES, FLOORS, ETC., ARE THOROUGHLY PROTECTED DURING ALL CONDITIONS FOR ACCEPTANCE BY THE OWNER.
14. INTENT OF DRAWINGS: PLANS ARE INTENDED TO SHOW DETAILS FOR A COMPLETE PROJECT. PARTS AND DETAILS NOT FULLY SHOWN SHALL BE DETAILED AND EXECUTED ACCORDING TO STANDARD FIRST CLASS PRACTICE AND IN SIMILAR MANNER AND SPIRIT OF DETAILS WHICH ARE SHOWN. IF THE CONTRACTOR FINDS DETAILS WHICH IN HIS OPINION ARE UNSOUND OR NOT STANDARDS, IT IS HIS DUTY TO NOTIFY THE ARCHITECT OF THIS FACT. IF HE PERFORMS THE WORK AS DETAILED WITHOUT SAID NOTIFICATIONS, THEN IT SHALL BE ASSUMED THAT HE DOES NOT OBJECT TO DETAIL. REFER TO RELATED NOTE BELOW FOR ERRORS AND OMISSION.
15. CLARIFICATION ON DRAWINGS: NOTE THAT DRAWINGS DO NOT SUPPORT TO SHOW ALL OBJECTS EXISTING ON THE JOB. BEFORE COMMENCING ANY DEMOLITION, VERIFY ALL OBJECTS TO BE REMOVED AND ALL OBJECTS TO BE PRESERVED.
16. DIMENSIONS: FIGURED DIMENSIONS SHALL BE FOLLOWED IN PREFERENCE TO SMALL SCALE DRAWINGS. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS IN THE FIELD BEFORE ANY WORK IS CONSTRUCTED AND/ OR FABRICATED. THE SPECIFICATION AND/OR SCHEDULES ON THE DRAWINGS SHALL HAVE WRITTEN NOTES AND OR BE FOLLOWED IN PREFERENCE TO INFORMATION FURNISHED IN THE FORM OF LINES ON DRAWINGS. DETAILED CLARIFICATION DRAWINGS FURNISHED DURING CONSTRUCTION OR APPROVED BY THE ARCHITECT ARE TO BE CONSIDERED EXPLANATORY AND NOT AS MODIFICATIONS OF THESE PLANS AS SHALL BE CALLED CLARIFICATION DRAWINGS. ALL NOTES, FIGURES AND DETAIL DRAWINGS SHALL BE FOLLOWED AND EXECUTED AS PART OF THESE NOTES.
17. ALL WRITTEN DIMENSIONS SHALL TAKE PRECEDENCE OVER SCALED DIMENSIONS. DIMENSION LINES ARE TO FACE OF STUD UNLESS NOTED OTHERWISE (U.N.O.)

NOTE: PLEASE NOTE THAT ALL SPECIFIED MATERIALS ARE SUBJECT TO CHANGE UPON APPROVAL BY ALL PARTIES WITH AN EQUAL AND COMPARABLE ALTERNATE.

03 -CONCRETE WORK

1. REFER TO STRUCTURAL ENGINEERING CALCULATIONS AND THE MOST CURRENT SOILS REPORT FOR THE PERFORMANCE REQUIREMENTS FOR CONCRETE FOUNDATIONS.
2. CONCRETE STRENGTH SHALL BE PER CBC SECTION 1808.8 AND TABLE TABLE 1808.8.1 REFER TO STRUCTURAL ENGINEERING CALCULATIONS FOR ADDITIONAL INFORMATION.
3. CONCRETE SHALL BE MIXED IN ACCORDANCE WITH CBC SECTION SECTION 1901.2.
4. CONCRETE PROPORTION SHALL BE PLACED IN ACCORDANCE WITH CBC SECTION 1808.8.
5. CONCRETE SHALL BE CURED IN ACCORDANCE WITH CBC CHAPTER 1905.1.
6. ALL FORM WORK SHALL BE DESIGNED, CONSTRUCTED, UTILIZED, AND REMOVED PER CBC SECTION 1808A.8.5
7. CONDUIT, PIPES, OR SLEEVES MAY PENETRATE OR BE EMBEDDED IN CONCRETE ONLY IN ACCORDANCE WITH PER A.C.I. 318-14.
8. CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN ACCORDANCE WITH CBC SECTION 1904.1
9. ALL STEEL REINFORCING OF CONCRETE SHALL BE DONE IN ACCORDANCE WITH CBC SECTION 1904.1
10. TOP OF CONCRETE SLABS TO BE MINIMUM 6" (8" HUD) ABOVE FINISH GRADE. CBC SECTION 1805.4.2
11. FOUNDATION WIDTHS, DEPTHS, AND REINFORCING, AS SHOWN ON PLANS, ARE SUPERCEDED BY ANY LOCAL CODES OR ORDINANCES WHICH REQUIRES INCREASES OF THE SAME.
12. ALL REINFORCEMENT, CONDUIT, OUTLET BOXES, ANCHORS, HANGERS, SLEEVES, BOLTS OR OTHER EMBEDDED MATERIALS AND ITEMS MUST BE SECURED AND APPROPRIATELY FASTENED IN THEIR PROPER LOCATIONS PRIOR TO THE PLACEMENT OF CONCRETE. SUB-CONTRACTOR SHALL VERIFY INSTALLATION OF HOLD-DOWNS. ANCHOR BOLTS, PA STRAPS, AND OTHER ANCHORAGE MATERIALS AND ITEMS PRIOR TO PLACEMENT OF CONCRETE.

04 -MASONRY

1. ANY AND ALL MATERIALS USED FOR THE CONSTRUCTION AND / OR INSTALLATION OF STONE OR MASONRY VENEER SHALL MEET THE QUALITY STANDARDS AS SET FORTH IN CBC SECTION 1404.7
2. ALL MORTAR AND GROUT USED FOR THE CONSTRUCTION AND/OR INSTALLATION OF STONE OR MASONRY VENEER SHALL MEET THE REQUIREMENTS OF CBC SECTION 2103.2 & 2104A.1.3
3. WATER USED IN MORTAR OR GROUT SHALL BE CLEAN AND FREE OF DELETERIOUS AMOUNTS OF ACID, ALKALIS, OR ORGANIC MATERIAL OR OTHER HARMFUL SUBSTANCES
4. MORTAR FOR MASONRY CONSTRUCTION SHALL COMPLY WITH SECTION 2103A.2.1, 2103A.2.2, 2103A.2.3 OR 2103A.2.4.
5. GROUT SHALL COMPLY WITH ARTICLE 2.2 OF TMS 602. COARSE GROUT SHALL BE USED IN GROUT SPACES BETWEEN WYTHES OF 2 INCHES (51 MM) OR MORE IN WIDTH AS DETERMINED IN ACCORDANCE WITH TMS 602 TABLE 6, FOOTNOTE 3, AND IN ALL GROUTED CELLS OF HOLLOW UNIT MASONRY CONSTRUCTION. (CBC SEC 2103.3)
6. CEMENT SHALL BE PORTLAND CEMENT CONFORMING TO ASTM C150-12
7. ALL BRICK SHALL CONFORM TO ASTM C1088-13 FOR SOLID UNITS OF THIN VENEER BRICK
8. UNLESS SPECIFICALLY SHOWN OTHERWISE ALL BRICK SHALL BE LAID IN A RUNNING BOND PATTERN.
9. MASONRY VENEER SHALL BE ANCHORED TO THE SUPPORTING WALL STUDS WITH CORROSION-RESISTANT METAL TIES EMBEDDED IN MORTAR OR GROUT AND EXTENDING INTO THE VENEER A MINIMUM OF 1 1/2 INCHES, WITH NOT LESS THAN 5/8 INCH MORTAR OR GROUT COVER TO OUTSIDE FACE. MASONRY VENEER SHALL CONFORM (CBC SECTION 1404.6) AS AN ALTERNATIVE TO THE AIRSPACE REQUIRED BY TABLE 1404.6, GROUT SHALL BE PERMITTED TO FILL THE AIRSPACE. WHERE THE AIRSPACE IS FILLED WITH GROUT, A WATER-RESISTIVE BARRIER IS REQUIRED OVER STUDS OR SHEATHING. WHERE THE AIRSPACE IS FILLED, REPLACING THE SHEATHING AND WATER-RESISTIVE BARRIER WITH WIRE MESH AND APPROVED WATER RESISTIVE BARRIER-BACKED REINFORCEMENT ATTACHED DIRECTLY TO STUD IS PERMITTED. (CBC SECTION 1404.6)
10. MORTAR FOR USE WITH ADHERED MASONRY VENEER SHALL CONFORM TO ASTM C270 FOR TYPE N OR S, OR SHALL COMPLY WITH ANSI A118.4 FOR LATEX-MODIFIED PORTLAND CEMENT MORTAR PER CBC 2103.2.4 AND THE REQUIREMENTS IN SECTION 12.1 AND 12.3 OF TMS 402. ADHERED MASONRY VENEER SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS. MASONRY VENEER SHALL COMPLY WITH THE PROVISIONS OF CHAPTER 14. (CBC 2101.2.1) FLASHING AND WEEP HOLES IN ANCHORED VENEER DESIGNED IN ACCORDANCE WITH SECTION 1404.6 SHALL BE LOCATED NOT MORE THAN 10 INCHES ABOVE FINISHED GROUND LEVEL ABOVE THE FOUNDATION WALL OR SLAB. AT OTHER POINTS OF SUPPORT INCLUDING STRUCTURAL FLOORS, SHELF ANGLES AND LINTELS, FLASHING AND WEEP HOLES SHALL BE LOCATED IN THE FIRST COURSE OF MASONRY ABOVE THE SUPPORT. (CBC 1404.4.2

05 -METALS

1. REFER TO STRUCTURAL NOTES AND SPECIFICATIONS FOR STRUCTURAL STEEL AND METAL AND REINFORCING STEEL SPECIFICATIONS
2. ALL STRUCTURAL STEEL SHALL CONFORM TO 2022 CBC; ANSI S100, AISI S200 AND ASTM C955 SEC. 8, AISI S220 AND ASTM C645, SEC. 10 AND AISI S230
   FOUNDATION ANCHORAGE, WOOD SILL PLATES AND WOOD WALLS SUPPORTED DIRECTLY ON CONTINUOUS FOUNDATION SHALL BE ANCHORED TO THE FOUNDATION IN ACCORDANCE TO CBC SECTION 2308.6.7.3
3. FASTENERS FOR ALL PRESERVATIVE TREATED WOOD INCLUDING NUTS AND WASHERS SHALL BE OF HOT-DIPPED ZINC COATED GALVANIZED STEEL, STAINLESS STEEL, SILICON BRONZE OR COPPER.

06 -WOOD, PLASTIC & COMPOSITES

LUMBER

1. THE DESIGN OF STRUCTURAL ELEMENTS OR SYSTEMS, CONSTRUCTED PARTIALLY OR WHOLLY OF WOOD OR WOOD-BASED PRODUCTS, SHALL BE IN ACCORDANCE WITH ONE OF THE FOLLOWING METHODS:
   - A. ALLOWABLE STRESS DESIGN IN ACCORDANCE WITH SECTIONS 2304, 2305 AND 2306.
   - B. LOAD AND RESISTANCE FACTOR DESIGN IN ACCORDANCE WITH SECTIONS 2304, 2305 AND 2307.
   - C. CONVENTIONAL LIGHT-FRAME CONSTRUCTION IN ACCORDANCE WITH SECTIONS 2304 AND 2308.
   - D. AWC WFCM IN ACCORDANCE WITH SECTION 2309.
   - E. THE DESIGN AND CONSTRUCTION OF LOG STRUCTURES IN ACCORDANCE WITH THE PROVISIONS OF ICC 400.
2. ALL PRESERVATIVE TREATED WOOD REQUIRED TO BE TREATED UNDER CBC SECTION 2303.1.9.1 SHALL BEAR THE QUALITY MARK OF AN INSPECTION AGENCY WHICH HAS BEEN ACCREDITED BY AN ACCREDITATION BODY THAT COMPLIES WITH THE REQUIREMENTS OF THE AMERICAN LUMBER STANDARDS TREATED WOOD PROGRAM OR EQUIVALENT. THE QUALITY MARK SHALL BE ON A STAMPED OR LABEL AFFIXED TO THE PRESERVATIVE-TREATED WOOD. CBC SECTION 2303.1.9.1
3. ALL LUMBER SIZES NOTED AND SPECIFIED ON PLANS ARE NOMINAL SIZES UNLESS SPECIFICALLY INDICATED AS NET SIZE

GLUE LAMINATED LUMBER

1. GLUED-LAMINATED TIMBERS SHALL BE MANUFACTURED AND IDENTIFIED AS REQUIRED IN ANSI/APA 190.1 AND ASTM D3737. AND THE CURRENT EDITION OF THE TIMBER CONSTRUCTION MANUAL BY THE AMERICAN INSTITUTE OF TIMBER CONSTRUCTION
2. REFER TO THE STRUCTURAL ENGINEER'S CURRENT NOTES, CALCULATIONS AND SPECIFICATIONS

PROTECTION AGAINST DECAY & TERMITE

1. WOOD SHALL BE PROTECTED FROM DECAY AND TERMITES IN ACCORDANCE WITH THE APPLICABLE PROVISIONS OF SECTIONS 2304.12.1 THROUGH 2304.12.4.
2. WOOD USED ABOVE GROUND IN THE LOCATIONS SPECIFIED IN SECTIONS 2304.12.1.1 THROUGH 2304.12.1.5 SHALL BE NATURALLY DURABLE WOOD OR PRESERVATIVE-TREATED WOOD USING WATERBORNE PRESERVATIVES, IN ACCORDANCE WITH AWPA U1 FOR ABOVE-GROUND USE. (CBC 2304.12)
3. WOOD JOISTS OR WOOD STRUCTURAL FLOORS THAT ARE CLOSER THAN 18 INCHES OR WOOD GIRDERS THAT ARE CLOSER THAN 12 INCHES TO THE EXPOSED GROUND IN CRAWL SPACES OR UNEXCAVATED AREAS LOCATED WITHIN THE PERIMETER OF THE BUILDING FOUNDATION SHALL BE OF NATURALLY DURABLE OR PRESERVATIVE-TREATED WOOD. (CBC 2304.12.1.1)
4. WOOD FRAMING MEMBERS, INCLUDING WOOD SHEATHING, THAT ARE IN CONTACT WITH EXTERIOR FOUNDATION WALLS AND ARE LESS THAN 8 INCHES FROM EXPOSED EARTH SHALL BE OF NATURALLY DURABLE OR PRESERVATIVE-TREATED WOOD. (CBC 2304.12.1.2)
5. SLEEPERS AND SILLS ON A CONCRETE OR MASONRY SLAB THAT IS IN DIRECT CONTACT WITH EARTH SHALL BE OF NATURALLY DURABLE OR PRESERVATIVE-TREATED WOOD. (CBC 2304.12.1.4)
6. WOOD USED IN THE LOCATIONS SPECIFIED IN SECTIONS 2304.12.2.1 THROUGH 2304.12.2.8 SHALL BE NATURALLY DURABLE WOOD OR PRESERVATIVE-TREATED WOOD IN ACCORDANCE WITH AWPA U1. PRESERVATIVE-TREATED WOOD USED IN INTERIOR LOCATIONS SHALL BE PROTECTED WITH TWO COATS OF URETHANE, SHELLAC, LATEX EPOXY OR VARNISH UNLESS WATERBORNE PRESERVATIVES ARE USED. PRIOR TO APPLICATION OF THE PROTECTIVE FINISH, THE WOOD SHALL BE DRIED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. (CBC 2304.12.2)
7. POSTS OR COLUMNS SUPPORTING PERMANENT STRUCTURES AND SUPPORTED BY A CONCRETE OR MASONRY SLAB OR FOOTING THAT IS IN DIRECT CONTACT WITH THE EARTH SHALL BE OF NATURALLY DURABLE OR PRESERVATIVE-TREATED WOOD.
   EXCEPTION: POSTS OR COLUMNS THAT MEET ALL OF THE FOLLOWING: (CBC 2304.12.2.2)
   - A. ARE NOT EXPOSED TO THE WEATHER, OR ARE PROTECTED BY A ROOF, EAVE, OVERHANG, OR OTHER COVERING IF EXPOSED TO THE WEATHER.
   - B. ARE SUPPORTED BY CONCRETE PIERS OR METAL PEDESTALS PROJECTED NOT LESS THAN 1 INCH ABOVE THE SLAB OR DECK AND ARE SEPARATED FROM THE CONCRETE PIER BY AN IMPERVIOUS MOISTURE BARRIER.
   - C. ARE LOCATED NOT LESS THAN 8 INCHES ABOVE EXPOSED EARTH.
8. NATURALLY DURABLE OR PRESERVATIVE-TREATED WOOD SHALL BE UTILIZED FOR THOSE PORTIONS OF WOOD MEMBERS THAT FORM THE STRUCTURAL SUPPORTS OF BUILDINGS, BALCONIES, PORCHES OR SIMILAR PERMANENT BUILDING APPURTENANCES WHERE SUCH MEMBERS ARE EXPOSED TO THE WEATHER WITHOUT ADEQUATE PROTECTION FROM A ROOF, EAVE, OVERHANG OR OTHER COVERING TO PREVENT MOISTURE OR WATER ACCUMULATION ON THE SURFACE OR AT JOINTS BETWEEN MEMBERS. (CBC 2304.12.2.3)
9. WOOD STRUCTURAL MEMBERS THAT SUPPORT MOISTURE-PERMEABLE FLOORS OR ROOFS THAT ARE EXPOSED TO THE WEATHER, SUCH AS CONCRETE OR MASONRY SLABS, SHALL BE OF NATURALLY DURABLE OR PRESERVATIVE-TREATED WOOD UNLESS SEPARATED FROM SUCH FLOORS OR ROOFS BY AN IMPERVIOUS MOISTURE BARRIER. THE IMPERVIOUS MOISTURE BARRIER SYSTEM PROTECTING THE STRUCTURE SUPPORTING FLOORS SHALL PROVIDE POSITIVE DRAINAGE OF WATER THAT INFILTRATES THE MOISTURE-PERMEABLE FLOOR TOPPING. (CBC 2304.12.2.4)
10. ENCLOSED FRAMING IN EXTERIOR BALCONIES AND ELEVATED WALKING SURFACES THAT HAVE WEATHEREXPOSED SURFACES SHALL BE PROVIDED WITH OPENINGS THAT PROVIDE A NET FREE CROSS-VENTILATION AREA NOT LESS THAN 1/150 OF THE AREA OF EACH SEPARATE SPACE. (CBC 2304.12.2.5)
11. WOOD USED IN CONTACT WITH EXPOSED EARTH SHALL BE NATURALLY DURABLE FOR BOTH DECAY AND TERMITE RESISTANCE OR PRESERVATIVE TREATED IN ACCORDANCE WITH AWPA U1 FOR SOIL OR FRESH WATER USE. EXCEPTION: UNTREATED WOOD IS PERMITTED WHERE SUCH WOOD IS CONTINUOUSLY AND ENTIRELY BELOW THE GROUND-WATER LEVEL OR SUBMERGED IN FRESH WATER. (CBC 2304.12.2.6)

SHEATHING

1. WOOD STRUCTURAL PANEL WALL SHEATHING SHALL CONFORM TO DOS PS I OR DOC PS 2 OR ANSI/APA PRP 210 CSA 0437 OR CSA 0325. PANELS SHALL BE IDENTIFIED BY A GRADE MARK OR CERTIFICATE OF INSPECTION ISSUED BY AN APPROVED AGENCY (SEC R604.1)
2. WOOD STRUCTURAL PANEL USED AS ROOF SHEATHING SHALL CONFORM TO REQUIREMENTS OF CBC SECTION 2304.8
3. REFER TO THE STRUCTURAL ENGINEER'S CURRENT SPECIFICATIONS CALCULATIONS AND PLANS FOR REQUIRED STRENGTH, GRADE, AND THICKNESS FOR WOOD STRUCTURAL PANEL ROOF SHEATHING AND FOR DIAPHRAGM NAILING.
4. REFER TO THE STRUCTURAL ENGINEER'S CURRENT SPECIFICATIONS, CALCULATIONS AND PLANS FOR REQUIRED STRENGTH, GRADE, AND THICKNESS FOR THICKNESS FOR PLYWOOD FLOOR SHEATHING PANELS AND FOR DIAPHRAGM NAILING AND ADHESIVE REQUIREMENTS
5. WHERE APPLICABLE, REFER TO THE SHEAR WALL SCHEDULE FOR REQUIRED STRENGTH, GRADE, AND THICKNESS OF PLYWOOD SHEAR PANELS AND FOR REQUIRED SHEAR WALL NAILING SCHEDULE

FLOOR FRAMING

1. REFER TO THE STRUCTURAL ENGINEER'S CURRENT PLAN & CALCULATIONS FOR SIZE, SPACING AND ANCHORAGE OF ALL FLOOR JOISTS; SIZE, LOCATION, AND ANCHORAGE OF ALL FLOOR BEANS AND HEADERS, AND ALL RELATED FRAMING ISSUES
2. THE PLACEMENT OF HOLES IN FLOOR JOIST WEBS SHALL BE PER MANUFACTURER'S SPECIFICATIONS. THE NOTCHING OR CUTTING OF FLOOR JOIST FLANGES IS NOT ALLOWED.

ROOF FRAMING

1. ROOF FRAMING SHALL BE PRE-MANUFACTURED ROOF TRUSSES SPACED AT 24 INCHES ON CENTER UNLESS NOTED OTHERWISE.
2. THE MANUFACTURER SHALL SUPPLY TO THE ARCHITECT AND BUILDER CALCULATIONS AND SHOP DRAWINGS FOR APPROVAL OF DESIGN LOADS CONFIGURATION (2 OR 3 POINT BEARING), VOLUME CEILING OPTIONS, AND SHEAR TRANSFER, PRIOR TO FABRICATION
   ALL CALCULATIONS AND SHOP DRAWINGS SHALL BE SIGNED BY PROFESSIONAL ENGINEER REGISTERED IN THE STATE WHEREIN THE PROJECT IS TO BE BUILT
3. MANUFACTURER IS TO SECURE BUILDING DEPARTMENT APPROVAL OF CALCULATIONS AND SHOP DRAWINGS PROPER TO FABRICATION
4. TRUSSES SHALL BE DESIGNED IN ACCORDANCE WITH THE LATEST BUILDING CODE FOR ALL LOADS IMPOSED, INCLUDING LATERAL LOADS AND MECHANICAL EQUIPMENT LOADS.
5. ALL CONNECTORS SHALL BE ICC APPROVED AND OF ADEQUATE STRENGTH TO RESIST ALL DESIGN LOADS.
6. AN ATTIC ACCESS MINIMUM OPENING ALLOWED IS 22" X 30", PROVIDED THE LARGEST PIECE OF EQUIPMENT CAN BE REMOVED THROUGH THE OPENING. (2022 CALIFORNIA MECHANICAL CODE - SECTION 904.10) ATTIC ACCESS BE PROVIDED AND LOCATED IN A CORRIDOR, HALLWAY OR OTHER READILY ACCESSIBLE LOCATION. THIRTY-INCH-MINIMUM UNOBSTRUCTED HEADROOM IN THE ATTIC SPACE SHALL BE PROVIDED AT SOME POINT ABOVE THE ACCESS MEASURED VERTICALLY FROM THE BOTTOM OF CEILING FRAMING MEMBERS (CBC SEC 1209.2).

WALL FRAMING

1. ROOF FRAMING SHALL BE PRE-MANUFACTURED ROOF TRUSSES SPACED AT 24 INCHES ON CENTER UNLESS NOTED OTHERWISE.
2. THE MANUFACTURER SHALL SUPPLY TO THE ARCHITECT AND BUILDER CALCULATIONS AND SHOP DRAWINGS FOR APPROVAL OF DESIGN LOADS CONFIGURATION (2 OR 3 POINT BEARING), VOLUME CEILING OPTIONS, AND SHEAR TRANSFER, PRIOR TO FABRICATION
3. ALL CALCULATIONS AND SHOP DRAWINGS SHALL BE SIGNED BY PROFESSIONAL ENGINEER REGISTERED IN THE STATE WHEREIN THE PROJECT IS TO BE BUILT
4. MANUFACTURER IS TO SECURE BUILDING DEPARTMENT APPROVAL OF CALCULATIONS AND SHOP DRAWINGS PROPER TO FABRICATION
5. TRUSSES SHALL BE DESIGNED IN ACCORDANCE WITH THE LATEST BUILDING CODE FOR ALL LOADS IMPOSED, INCLUDING LATERAL LOADS AND MECHANICAL EQUIPMENT LOADS.
6. ALL CONNECTORS SHALL BE ICC APPROVED AND OF ADEQUATE STRENGTH TO RESIST ALL DESIGN LOADS.
7. AN ATTIC ACCESS MINIMUM OPENING ALLOWED IS 22" X 30", PROVIDED THE LARGEST PIECE OF EQUIPMENT CAN BE REMOVED THROUGH THE OPENING. (2022 CALIFORNIA MECHANICAL CODE - SECTION 904.10) ATTIC ACCESS BE PROVIDED AND LOCATED IN A CORRIDOR, HALLWAY OR OTHER READILY ACCESSIBLE LOCATION. THIRTY-INCH-MINIMUM UNOBSTRUCTED HEADROOM IN THE ATTIC SPACE SHALL BE PROVIDED AT SOME POINT ABOVE THE ACCESS MEASURED VERTICALLY FROM THE BOTTOM OF CEILING FRAMING MEMBERS (CBC SEC1209.2).

FIRE BLOCKING (CBC 718.2)

1. IN COMBUSTIBLE CONSTRUCTION, FIRE BLOCKING SHALL BE PROVIDED TO CUT OFF BOTH VERTICAL AND HORIZONTAL CONCEALED DRAFT OPENINGS AND TO FORM AN EFFECTIVE FIRE BARRIER BETWEEN STORIES, AND BETWEEN A TOP STORY AND THE ROOF SPACE. FIREBLOCKING SHALL BE PROVIDED IN A WOOD-FRAMED CONSTRUCTIONS IN THE LOCATIONS SPECIFIED IN CBC SECTION 718.2.
2. FIREBLOCKING SHALL BE PROVIDED IN THE FOLLOWING LOCATIONS:
   - A. IN CONCEALED SPACES OF STUD WALLS AND PARTITIONS, INCLUDING FURRED SPACES, AND PARALLEL ROWS AND STUDS OR STAGGERED STUDS, AS FOLLOWS:
     - a. VERTICALLY AT THE CEILING AND FLOOR LEVELS
     - b. HORIZONTALLY AT INTERVALS NOT EXCEEDING 10 FEET
   - B. AT INTERCONNECTIONS BETWEEN CONCEALED VERTICAL AND HORIZONTAL SPACES SUCH AS OCCUR AT SOFFITS, DROP CEILINGS AND COVE CEILINGS
   - C. FIREBLOCKING SHALL BE PROVIDED IN CONCEALED SPACES BETWEEN STAIR STRINGERS AT THE TOP AND BOTTOM OF THE RUN. ENCLOSED SPACES UNDER STAIRWAYS SHALL COMPLY WITH SECTION 1011.7.3.
   - D. AT OPENINGS AROUND VENTS, PIPES, DUCTS, CABLES, AND WIRES AT CEILING & FLOOR LEVELS, WITH AN APPROVED MATERIAL TO RESIST FREE PASSAGE OF FLAME AND PRODUCTS OF COMBUSTION. THE MATERIAL FILLING THIS ANNULAR SPACE SHALL NOT BE REQUIRED TO MEET THE ASTM E 136 REQUIREMENTS
   - E. FOR THE FIREBLOCKING AT CHIMNEYS AND FIREPLACES, SEE CBC SECTION 2113.11
3. FIREBLOCKING OF CORNICES OF A TWO-FAMILY DWELLING IS REQUIRED AT THE LINE OF DWELLING UNIT SEPARATION. (CBC SECTION 2113.20).
4. FIRE BLOCKING SHALL CONSIST OF 2 INCHES NOMINAL LUMBER OR TWO THICKNESS OF 1-INCH NOMINAL LUMBER WITH BROKEN LAP JOINTS OR ONE THICKNESS OF 28/32-INCH WOOD STRUCTURAL PANELS WITH JOINTS BACKED BY 23/32-INCH WOOD STRUCTURAL PANELS OR ONE THICKNESS OF 3/4 - INCH PARTICLEBOARD WITH JOINTS BACKED BY 3/4-INCH PARTICLEBOARD OR ONE-HALF-INCH GYPSUM BOARD OR ONE-QUARTER-INCH CEMENT-BASED MILLBOARD OR BATTS OR BLANKETS OF MINERAL WOOL OR GLASS FIBER OR OTHER APPROVED MATERIALS INSTALLED IN SUCH A MANNER AS TO BE SECURELY RETAINED IN PLACE OR CELLULOSE INSULATION INSTALLED AS TESTED IN ACCORDANCE WITH ASTM E119 OR UL 263 FOR SPECIFIED APPLICATIONS. (CBC SEC 718.2.1).
5. WALLS CONSTRUCTED USING PARALLEL OR STAGGERED STUDS FOR SOUND TRANSMISSION CONTROL SHALL HAVE FIRE BLOCKS OF BATTS OR BLANKETS OF MINERAL OR GLASS FIBER OR OTHER APPROVED NONRIGID MATERIALS SHALL BE PERMITTED FOR COMPLIANCE WITH 10-FOOT HORIZONTAL FIREBLOCKING (CBC SEC 718.2.1)
6. IN COMBUSTIBLE CONSTRUCTION WHERE THERE IS USABLE SPACE BOTH ABOVE AND BELOW THE CONCEALED SPACE OF FLOOR-CEILING ASSEMBLY,DRAFTSTOPS SHALL BE INSTALLED SO THAT THE AREA OF THE CONCEALED SPACE DOES NOT EXCEED 1000 SQUARE FEET. DRAFT-STOPPING SHALL DIVIDE THE CONCEALED SPACE INTO APPROXIMATELY EQUAL AREAS WHERE THE ASSEMBLY IS ENCLOSED BY A FLOOR MEMBRANE ABOVE AND A CEILING MEMBRANE BELOW, DRAFTSTOPPING SHALL BE PROVIDED IN FLOOR-CEILING ASSEMBLIES UNDER THE FOLLOWING CIRCUMSTANCES:
   - A. CEILING IS SUSPENDED UNDER THE FLOOR FRAMING
   - B. FLOOR FRAMING IS CONSTRUCTED OF TRUSS-TYPE OPEN-WEB OR PERFORATED MEMBERS (CBC SECTION 718.3 & 718.4)
7. DRAFTSTOPPING MATERIALS SHALL NOT BE LESS THAN 1/2-INCH GYPSUM BOARD, 3/8-INCH WOOD STRUCTURAL PANELS OR OTHER APPROVED MATERIALS ADEQUATELY SUPPORTED. DRAFTSTOPPING SHALL BE INSTALLED PARALLEL TO THE FLOOR FRAMING MEMBERS UNLESS OTHERWISE APPROVED BY THE BUILDING OFFICIAL. INTEGRITY OF THE DRAFTSTOPS SHALL BE MAINTAINED. (CBC SEC 718.3.1 & 718.4.1)

07 -THERMAL & MOISTURE PROTECTION

1. PROVIDE ALL FLASHING, COUNTER-FLASHING, BITUMEN, MEMBRANE WATERPROOFING, SHEET METAL, CAULKING, SEALANTS, ELECTROMERIC WALKING SURFACES, AND RAIN GUTTERS AND/OR DIVERTERS WHERE REQUIRED, TO MAKE WORK COMPLETELY WATERPROOF.
2. THE TERMS "CORROSION RESISTANT" OR "NON-CORROSIVE" THE ABILITY OF A MATERIAL TO WITHSTAND DETERIORATION OF ITS SURFACE OR ITS PROPERTIES WHEN EXPOSED TO ITS ENVIRONMENT. (CBC SEC 202). WHEN AN ELEMENT IS REQUIRED TO BE CORROSION RESISTANT OR NON-CORROSIVE, ALL OF ITS PARTS, SUCH AS SCREWS, NAILS, WIRE, DOWELS, BOLTS, NUTS, WASHERS, SHIMS, ANCHORS, TIES AND ATTACHMENTS, SHALL BE CORROSION RESISTANT
3. MATERIALS USED FOR CONSTRUCTION OF EXTERIOR WALLS SHALL COMPLY WITH THE PROVISIONS OF SECTION 1406.2. THE EXTERIOR WALL ENVELOPE SHALL BE DESIGNED AND CONSTRUCTED IN A MANNER THAT PREVENTS THE ACCUMULATION OF WATER WITHIN THE WALL ASSEMBLY BY PROVIDING WATER RESISTIVE BARRIER WHICH IS A MINIMUM OF ONE LAYER OF NO. 15 ASPHALT FELT COMPLYING WITH ASTM D226 FOR TYPE I FELT OR OTHER APPROVED WATER-RESISTIVE BARRIER SHALL BE APPLIED OVER STUDS OR SHEATHING OF ALL EXTERIOR WALLS, AS DESCRIBED IN SEC 1402.5 PROTECTION AGAINST CONDENSATION IN THE EXTERIOR WALL ASSEMBLY SHALL BE PROVIDED IN ACCORDANCE WITH THE CALIFORNIA ENERGY CODE (CBC SECTION 1402.2)
4. EXTERIOR WALLS SHALL PROVIDE THE BUILDING WITH WEATHER RESISTANT EXTERIOR WALL ENVELOPE. THE EXTERIOR WALL ENVELOPE SHALL INCLUDE FLASHING AS DESCRIBED IN SECTION 1404.4 (CBC SECTION 1404)
5. APPROVED CORROSION RESISTANT FLASHING SHALL BE APPLIED SHINGLE FASHION IN A MANNER TO PREVENT ENTRY OF WATER INTO THE WALL CAVITY OR PENETRATION OF WATER TO BUILDING STRUCTURAL FRAMING COMPONENTS SELF-ADHERED MEMBRANES USED AS FLASHING SHALL AAMA 711. FLUID-APPLIED MEMBRANES USED AS FLASHING IN EXTERIOR WALLS SHALL COMPLY WITH AAMA 714. THE FLASHING SHALL EXTEND TO THE SURFACE OF THE EXTERIOR WALL FINISH. APPROVED CORROSION RESISTANT FLASHING SHALL BE INSTALLED AT THE FOLLOWING LOCATIONS:
   - A. FLASHING AT EXTERIOR WINDOW AND DOOR OPENINGS SHALL EXTEND TO THE SURFACE OF THE EXTERIOR WALL FINISH OR TO THE WATER RESISTIVE BARRIER FOR SUBSEQUENT DRAINAGE
   - B. AT THE INTERSECTION OF CHIMNEYS OR OTHER MASONRY CONSTRUCTION WITH FRAME OR STUCCO WALLS, WITH PROJECTING LIPS ON BOTH SIDES UNDER STUCCO COPINGS.
   - C. UNDER AND THE ENDS OF MASONRY, WOOD, OR METAL COPINGS AND SILLS
   - D. CONTINUOUSLY ABOVE ALL PROJECTING WOOD TRIMS
   - E. WHERE EXTERIOR PORCHES, DECKS OR STAIRS ATTACH TO A WALL OR FLOOR ASSEMBLY OF WOOD-FRAME CONSTRUCTION
   - F. AT WALL AND ROOF INTERSECTIONS AT BUILT-IN GUTTERS
6. BALCONIES,LANDINGS, EXTERIOR STAIRWAYS, OCCUPIED ROOFS AND SIMILAR SURFACES EXPOSED TO THE WEATHER AND SEALED UNDERNEATH SHALL BE AND SLOPED A MINIMUM OF 1/4 UNIT VERTICAL IN 12 UNITS HORIZONTALLY (2% SLOPE) FOR DRAINAGE (CBC 1012.6.1)
7. COURTS SHALL BE NOT LESS THAN 3 FEET IN WIDTH. COURTS HAVING WINDOWS OPENING ON OPPOSITE SIDES SHALL BE NOT LESS THAN 6 FEET IN WIDTH. COURTS SHALL BE NOT LESS THAN 10 FEET IN LENGTH UNLESS BOUNDED ON ONE END BY A PUBLIC WAY OR YARD. THE BOTTOM OF EVERY COURT SHALL BE PROPERLY GRADED AND DRAINED TO A PUBLIC SEWER OR OTHER APPROVED DISPOSAL SYSTEM COMPLYING WITH THE CALIFORNIA PLUMBING CODE. (CBC 1205.3)
8. ELASTOMERIC OR MEMBRANE DECK COATINGS SHALL BE INSTALLED PER MANUFACTURER'S SPECIFICATIONS AT DECKS AND BALCONIES. COLOR FINISH AND DETAILING SHALL BE APPROVED BY OWNER / BUILDER AND ARCHITECT.
9. UNLESS DESIGNED TO DRAIN OVER DECK EDGES, DRAINS, AND OVER-FLOWS ADEQUATE SIZE SHALL BE INSTALLED AT THE LOW POINTS OF DECK OR BALCONY.
10. ALL SHEET METAL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE RECOMMENDATIONS AND STANDARDS OF THE SHEET METAL AND AIR CONDITIONING CONTRACTOR'S NATIONAL ASSOCIATION (S.M.A.C.N.A.). THE ARCHITECTURAL SHEET METAL MANUAL, AND SEALANT, WATERPROOFING AND RESTORATION INSTITUTE'S (S.W.R.I.) GUIDE - "SEALANT'S: THE PROFESSIONAL'S GUIDE".
11. SHEET METAL SHALL BE STEEL, HOT-DIPPED, TIGHT COATED IN GALVANIZED, CONFORMING TO ASTM A525 AND SHALL BE A NUMBER 24 SHEET METAL GAGE UNLESS OTHERWISE NOTED IN THESE NOTES, PLANS, OR MANUFACTURER'S SPECIFICATIONS.
12. SHEET ALUMINUM SHALL CONFORM WITH FEDERAL SPECIFICATIONS QQ-A-359 AND ASTM B209 ALLOY 3003.
13. FLASHING FOR ASPHALT SHINGLES SHALL COMPLY WITH SECTION 1507.2.8. FABRICATE SHEET METAL WITH FLAT LOCK SEAMS AND SOLDER WITH TYPE AND FLUX RECOMMENDED BY MANUFACTURER. SEAL ALUMINUM SEAMS WITH EPOXY METAL SEAM CEMENT. WHERE REQUIRED FOR STRENGTH, RIVET, SEAMS, AND JOINTS.
14. SHOP FABRICATE TO THE GREATEST EXTENT POSSIBLE IN ACCORDANCE WITH APPLICABLE STANDARDS TO PROVIDE A PERMANENTLY WATER-PROOF, WEATHER RESISTANT INSTALLATION
15. BASE AND CAP FLASHING SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S INSTALLATION INSTRUCTIONS. BASE FLASHING SHALL BE EITHER CORROSION RESISTANT METAL OF MINIMUM NOMINAL 0.019-INCH THICKNESS OR MINERAL SURFACE ROLL ROOFING WEIGHING A MINIMUM OF 77 POUNDS PER 100 SQUARE FEET. CAP FLASHING SHALL BE CORROSION-RESISTANT METAL OF MINIMUM NOMINAL 0.019-INCH THICKNESS. (CBC SECTION 1507.2.8.1)
16. ROOF VALLEY LININGS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS BEFORE APPLYING SHINGLES. VALLEY LINING OF THE FOLLOWING TYPES SHALL BE PERMITTED:
    - A. FOR OPEN VALLEYS (VALLEY LINING EXPOSED) LINED WITH METAL, THE VALLEY LINING SHALL BE NOT LESS THAN 24 INCHES WIDE AND OF ANY OF THE CORROSION-RESISTANT METALS IN TABLE 1507.2.8.2
    - B. FOR OPEN VALLEYS, VALLEY LINING OF TWO PLIES OF MINERAL-SURFACED ROLL ROOFING COMPLYING WITH ASTM D 3909 OR ASTM D 6380 CLASS M, SHALL BE PERMITTED. THE BOTTOM LAYER SHALL BE 18 INCHES AND THE TOP LAYER A MINIMUM OF 36 INCHES WIDE.
    - C. FOR CLOSED VALLEYS (VALLEYS COVERED WITH SHINGLES), VALLEY LINING OF ONE PLY OF SMOOTH ROLL ROOFING COMPLYING WITH ASTM D 6380 AND AT LEAST 36 INCHES WIDE OR VALLEY LINING AS DESCRIBED IN ITEM 1 OR 2 ABOVE SHALL BE PERMITTED. SELF-ADHERING POLYMER MODIFIED BITUMEN UNDERLAYMENT COMPLYING WITH ASTM D1970 SHALL BE PERMITTED IN LIEU OF THE LINING MATERIAL. (CBC SECTION 1507.2.8.2)
17. FLASHING:
    - A. FLASHING FOR ASPHALT SHINGLES SHALL COMPLY WITH THIS SECTION. FLASHING SHALL BE APPLIED IN ACCORDANCE WITH THIS SECTION AND THE ASPHALT SHINGLE MANUFACTURER'S PRINTED INSTRUCTIONS. (CBC 1507.2.8) A DRIP EDGE SHALL BE PROVIDED AT EAVES AND RAKE EDGES OF SHINGLE ROOFS. ADJACENT SEGMENTS OF THE DRIP EDGE SHALL BE LAPPED NOT LESS THAN 2 INCHES . THE VERTICAL LEG OF DRIP EDGES SHALL BE NOT LESS THAN 11/2 INCHES IN WIDTH AND SHALL EXTEND NOT LESS THAN 1/4 INCH BELOW SHEATHING. THE DRIP EDGE SHALL EXTEND BACK ON THE ROOF NOT LESS THAN 2 INCHES . UNDERLAYMENT SHALL BE INSTALLED OVER DRIP EDGES ALONG EAVES. DRIP EDGES SHALL BE INSTALLED OVER UNDERLAYMENT ALONG RAKE EDGES. DRIP EDGES SHALL BE MECHANICALLY FASTENED AT INTERVALS NOT GREATER THAN 12 INCHES ON CENTER.(CBC 1507.2.8.3)
    - B. CLAY AND CONCRETE TILE. AT THE JUNCTURE OF THE ROOF VERTICAL SURFACES, FLASHING AND COUNTERFLASHING SHALL BE PROVIDED IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND WHERE OF METAL, SHALL BE NOT LESS THAN 0.019-INCH (NO. 26 GALVANIZED SHEET GAGE) CORROSION-RESISTANT METAL. THE VALLEY FLASHING SHALL EXTEND NOT LESS THAN 11 INCHES FROM THE CENTERLINE EACH WAY AND HAVE A SPLASH DIVERTER RIB NOT LESS THAN 1 INCH HIGH AT THE FLOW LINE FORMED AS PART OF THE FLASHING. SECTIONS OF FLASHING SHALL HAVE AN END LAP OF NOT LESS THAN 4 INCHES . FOR ROOF SLOPES OF THREE UNITS VERTICAL IN 12 UNITS HORIZONTAL AND OVER, THE VALLEY FLASHING SHALL HAVE A 36-INCH-WIDE UNDERLAYMENT OF EITHER ONE LAYER OF TYPE I UNDERLAYMENT RUNNING THE FULL LENGTH OF THE VALLEY, OR A SELF-ADHERING POLYMER-MODIFIED BITUMEN SHEET BEARING A LABEL INDICATING COMPLIANCE WITH ASTM D1970, IN ADDITION TO OTHER REQUIRED UNDERLAYMENT. (CBC 1507.3.9)
    - C. 1507.5.7 METAL ROOF SHINGLES. ROOF VALLEY FLASHING SHALL BE OF CORROSION-RESISTANT METAL OF THE SAME MATERIAL AS THE ROOF COVERING OR SHALL COMPLY WITH THE STANDARDS IN TABLE 1507.4.3(1). THE VALLEY FLASHING SHALL EXTEND NOT LESS THAN 8 INCHES FROM THE CENTERLINE EACH WAY AND SHALL HAVE A SPLASH DIVERTER RIB NOT LESS THAN 3/4 INCH HIGH AT THE FLOW LINE FORMED AS PART OF THE FLASHING. SECTIONS OF FLASHING SHALL HAVE AN END LAP OF NOT LESS THAN 4 INCHES . IN AREAS WHERE THE AVERAGE DAILY TEMPERATURE IN JANUARY IS 25°F OR LESS OR WHERE THERE IS A POSSIBILITY OF ICE FORMING ALONG THE EAVES CAUSING A BACKUP OF WATER, THE METAL VALLEY FLASHING SHALL HAVE A 36-INCH-WIDE (914 MM) UNDERLAYMENT DIRECTLY UNDER IT CONSISTING OF EITHER ONE LAYER OF UNDERLAYMENT RUNNING THE FULL LENGTH OF THE VALLEY OR A SELF-ADHERING POLYMER-MODIFIED BITUMEN SHEET BEARING A LABEL INDICATING COMPLIANCE WITH ASTM D1970, IN ADDITION TO UNDERLAYMENT REQUIRED FOR METAL ROOF SHINGLES. THE METAL VALLEY FLASHING UNDERLAYMENT SHALL BE SOLIDLY CEMENTED TO THE ROOFING UNDERLAYMENT FOR ROOF SLOPES UNDER SEVEN UNITS VERTICAL IN 12 UNITS HORIZONTAL OR SELF-ADHERING POLYMER-MODIFIED BITUMEN SHEET SHALL BE INSTALLED.

EXTERIOR WALL COVERINGS

1. SEE FINISHES IN THESE GENERAL NOTES FOR EXTERIOR PLASTER
2. ALL EXTERIOR MATERIALS SHALL CONFORM TO THE REQUIREMENTS OF THE CURRENT EDITION THE CALIFORNIA BUILDING CODE AND ALL STATE AND LOCAL CODES
3. WATER-RESISTIVE BARRIERS SHALL BE INSTALLED AS REQUIRED PER CBC SECTION 1402.5 AND WHEN APPLIED OVER WOOD BASE SHEATHING, SHALL INCLUDE TWO LAYERS OF GRADE 'D' PAPER (CBC SECTION 1403.2)
4. FIBER-CEMENT PANELS SHALL COMPLY WITH THE REQUIREMENTS OF ASTM C1186, TYPE A, MINIMUM GRADE II (OR ISO 8336, CATEGORY A, MINIMUM CLASS 2). PANELS SHALL BE INSTALLED WITH THE LONG DIMENSION EITHER PARALLEL OR PERPENDICULAR TO FRAMING. VERTICAL AND HORIZONTAL JOINTS SHALL OCCUR OVER FRAMING MEMBERS AND SHALL BE PROTECTED WITH CAULKING, WITH BATTENS OR FLASHING, OR BE VERTICAL OR HORIZONTAL SHIPLAP OR OTHERWISE DESIGNED TO COMPLY WITH SECTION 1402.2. PANEL SIDING SHALL BE INSTALLED WITH FASTENERS IN ACCORDANCE WITH THE APPROVED MANUFACTURER'S INSTRUCTIONS. (CBC. SECTION 1404.16.1)
5. FIBER-CEMENT LAP SIDING HAVING A MAXIMUM WIDTH OF 12 INCHES (305 MM) SHALL COMPLY WITH THE REQUIREMENTS OF ASTM C1186, TYPE A, MINIMUM GRADE II (OR ISO 8336, CATEGORY A, MINIMUM CLASS 2). LAP SIDING SHALL BE LAPPED NOT LESS THAN 11/4 INCHES (32 MM) AND LAP SIDING NOT HAVING TONGUE-AND-GROOVE END JOINTS SHALL HAVE THE ENDS PROTECTED WITH CAULKING, COVERED WITH AN H-SECTION JOINT COVER, LOCATED OVER A STRIP OF FLASHING OR SHALL BE OTHERWISE DESIGNED TO COMPLY WITH SECTION 1402.2. LAP SIDING COURSES SHALL BE INSTALLED WITH THE FASTENER HEADS EXPOSED OR CONCEALED IN ACCORDANCE WITH THE APPROVED MANUFACTURER'S INSTRUCTIONS.(CBC. 1404.16.2)

TRIPLEX DWELLING UNIT

OPTION #1

PROJECT

TRIPLEX
DWELLING UNIT

PWP23-005

DEPARTMENT OF PUBLIC WORKS AND PLANNING

CAPITAL PROJECTS DIVISION

2220 Tulare St., Ste. 720, Fresno, CA. 93721
Phone: (559) 262-4212 Fax: (559) 262-4879

SEAL & SIGNATURE

LICENSED ARCHITECT
ROBINA R. WRIGHT
NO. C-32283
RENEWAL DATE 06/30/2025
STATE OF CALIFORNIA

UPDATE

MARCH 5, 2024

TITLE

GENERAL NOTES

SCALE 12" = 1'-0"

G-101

ISSUE DATE MARCH 28, 2023	JOB NUMBER 2023_12
DRAWN BY Author	CHECKED BY Checker

©

1. ***INSULATION*** MATERIALS, INCLUDING FACINGS, SUCH AS VAPOR RETARDER AND VAPOR-PERMEABLE MEMBRANES INSTALLED WITHIN FLOOR-CEILINGS ASSEMBLIES, ROOF CEILING ASSEMBLIES, WALL ASSEMBLIES, CRAWL SPACES, AND ATTICS SHALL HAVE A FLAME SPREAD INDEX NOT TO EXCEED 25 WITH AN ACCOMPANYING SMOKE-DEVELOPED INDEX NOT TO EXCEED 150 WHERE TESTED IN ACCORDANCE WITH ASTM E84 OR UL 723. EXCEPTIONS: WHEN SUCH MATERIALS ARE INSTALLED IN CONCEALED SPACES, THE FLAME SPREAD INDEX AND SMOKE-DEVELOPED INDEX LIMITATIONS DO NOT APPLY TO THE FACINGS, PROVIDED THAT THE FACING IS INSTALLED IN SUBSTANTIAL CONTACT WITH UNEXPOSED SURFACE OF THE CEILING, FLOOR OR WALL FINISH (CBC SEC 720.1 EXCP)
2. DUCT INSULATION AND INSULATION IN PLENUMS SHALL CONFORM TO THE REQUIREMENTS OF THE CURRENT CALIFORNIA MECHANICAL CODE
3. BATTS OR BLANKETS OF MINERAL OR GLASS FIBER OTHER APPROVED NON-RIGID MATERIAL SHALL BE PERMITTED FOR COMPLIANCE WITH 10 FOOT HORIZONTAL FIRE BLOCKING IN WALLS CONSTRUCTED USING PARALLEL ROWS OF STUDS OR STAGGERED STANCE. (CBC SECTION 718.2.1.1)
4. FOR PROJECTS WITHIN CALIFORNIA TO ENERGY EFFICIENCY REQUIREMENTS, INCLUDING BUT NOT LIMITED TO INSULATION "R" VALUES, PERCENTAGE OF GLAZING, GLAZING "U" VALUES, ETC. SHALL BE DETERMINED BY THE CALIFORNIA ENERGY CODE. A PART OF TITLE 24 AND LOCATED IN THE PLANS ON THE ENERGY COMPLIANCE SHEETS(S) (CFI – R). ENERGY CALCULATIONS PREPARED IN ACCORDANCE WITH STATE CODES ARE ALSO REQUIRED AS PART OF THE BUILDING DEPARTMENT SUBMITTAL
5. FOR PROJECTS WITHIN CALIFORNIA BUILDER AND INSULATION INSTALLER MUST PROVIDE A CERTIFICATE OF INSULATION AND POST IT IN CONSPICUOUS LOCATION FOR CALIFORNIA STATE ENERGY CODE
6. THE ENERGY REQUIREMENTS FOR PROJECTS OUTSIDE OF CALIFORNIA SHALL BE BASED ON MODEL, ENERGY CODE OR INTERNATIONAL ENERGY CONSERVATION CODE. REFER TO LOCAL JURISDICTION.
7. THE FOLLOWING OPENINGS IN THE BUILDING ENVELOPE MUST BE CAULKED SEALED OR WEATHERSTRIP TO PROTECT AGAINST COLD AIR, INFILTRATION OR HEAT LOSS:
    - A. EXTERIOR JOINTS AROUND WINDOW AND DOOR FRAMES, BETWEEN WALL PANELS, WALL, WALL SOLE PLATES AND FLOORS
    - B. AND INTERIOR WALLS, CEILINGS AND FLOORS; OPENINGS FOR PLUMBING, ELECTRICAL AND GAS LINES IN EXTERIOR OPENINGS IN THE ATTIC FLOOR, (SUCH AS WERE CEILING, PANELS ME INTERIOR AND EXTERIOR WALLS)
    - C. ALL OTHER SUCH OPENINGS IN THE BUILDING ENVELOPE.

ROOFING MATERIALS

1. ROOFING MATERIAL SHALL BE CLASS "A" UNLESS OTHERWISE APPROVED BY OWNER / BUILDER
2. THE QUALITY AND DESIGN OF ROOFING MATERIALS AND THEIR FASTENINGS SHALL CONFORM TO THE APPLICABLE STANDARDS LISTED IN CBC SECTION 1507.3 (FOR CLAY & CONCRETE TILE)
3. CLAY OR CONCRETE TILE SHALL COMPLY WITH CBC STANDARD 1507.3.5 ALL MATERIAL SHALL BE DELIVERED IN PACKAGES BEARING THE MANUFACTURER'S LABEL OR IDENTIFYING MARK. (CBC 1506.3)
4. COMPOSITION ROOFING SHINGLES SHALL BE OF ASPHALT OR APPROVED RELATED MATERIALS AND MEET THE REQUIREMENTS OF CBC SECTION 1507.2
5. ASPHALT SHALL BE DELIVERED IN CARTONS BEARING THE NAME OF THE MANUFACTURER'S IDENTIFYING MARKS AND APPROVED TESTING AGENCY LABELS REQUIRED. BULK SHIPMENTS SHALL BE ACCOMPANIED BY THE SAME INFORMATION ISSUED IN THE FORM OF A CERTIFICATE OR ON A BILL OF LADING BY THE MANUFACTURER (CBC SECTION 1506.3)
6. ASPHALT SHINGLES SHALL BE FASTENED ACCORDING TO THE MANUFACTURER'S INSTRUCTIONS, BUT NOT LESS THAN FOUR FASTENERS PER STRIP SHINGLE OR TWO FASTENERS PER INDIVIDUAL SHINGLE (CBC SECTION 1507.2.6)
7. CLAY OR CONCRETE ROOF TILES INSTALLATION SHALL COMPLY WITH THE PROVISIONS OF CBC SECTION 1507.3. UNDERLAYMENT SHALL COMPLY WITH SECTION 1507.1.1. AND TYPE AND CLASSIFICATION INDICATED ON TABLE TABLE 1507.1.1(1). UNDER-LAYMENT SHALL BE APPLIED PER TABLE 1507.1.1(2) AND ATTACHED PER TABLE 1507.1.1(3)
8. TYPE, COLOR, AND PROFILE OF ALL ROOFING TILES SHALL BE APPROVED BY OWNER / /BUILDER AND ARCHITECT
9. BUILT-UP ROOFING FLY MATERIALS SHALL BEAR THE LABEL OF AN APPROVED AGENCY HAVING A SERVICE FOR THE INSPECTION OF MATERIAL AND FINISHED PRODUCTS DURING MANUFACTURE. (CBC SECTION 1506.3)
10. BUILT-UP ROOFING SHALL BE INSTALLED ACCORDING TO CBC SECTION 1507.10 AND THE MANUFACTURER'S INSTALLATION INSTRUCTIONS. BUILT-UP ROOF COVERING MATERIALS SHALL COMPLY WITH THE STANDARDS IN TABLE 1507.10.2 OR UL 55A.

08 -OPENINGS

1. SEE OPENING SCHEDULE FOR SIZES AND TYPES OF DOOR AND WINDOWS, AND FOR ANY DIVIDED LITE PATTERNS. COLORS SHALL BE APPROVED BY THE OWNER/BUILDER.
2. EGRESS DOOR SHALL BE SIDE HINGE SWINGING, AND SHALL PROVIDE A CLEAR WIDTH NO LESS THAN 32 INCHES AND SHOULD OPEN DIRECTLY INTO A PUBLIC WAY, OR YARD OR COURT THAT OPENS TO A PUBLIC WAY. EXCEPTION: PRIVATE GARAGE AND DOORS WITHIN OR SERVING A SINGLE DWELLING UNIT IN GROUPS R –2 AND R-3.(CBC SECTION 1010)
3. THE DOOR FROM THE GARAGE TO THE HOUSE SHALL BE SOLID WOOD DOORS NO LESS THAN 1 3/8 INCHES AND THICKNESS, SOLID OR HONEYCOMB CORE STEEL. DOORS NO LESS THAN 1 3/8 INCHES THICK OR 20 MINUTES FIRE RATED DOORS. EQUIPPED WITH A SELF CLOSING OR AUTOMATIC CLOSING AND SELF LATCHING DEVICE. (CBC SECTION 406.3.2.1)
4. PROVIDE SECURITY HARDWARE FOR ALL DOORS AND WINDOWS IN CONFORMANCE WITH ALL STATE AND LOCAL CODE REQUIREMENTS.
5. ALL AUTOMATIC GARAGE DOOR OPENERS IF PROVIDED, SHALL BE LISTED IN ACCORDANCE WITH YOU UL325. SEE HEALTH AND SAFETY CODE SECTION 19890 AND 19891 FOR ADDITIONAL PROVISIONS FOR RESIDENTIAL GARAGE DOOR OPENERS.(CBC SECTION 406.2.1.)
6. ALL SLIDING OR SWINGING DOORS AND WINDOWS OPENING TO THE EXTERIOR OR TO UNCONDITIONAL AREA SHALL BE FULLY WEATHER-STRIPPED, GASKETED, OR OTHERWISE TREATED TO LIMIT AIR INFILTRATION.
7. ALL MANUFACTURED WINDOWS AND SLIDING GLASS DOORS SHALL MEET AIR INFILTRATION STANDARDS OF THE CURRENT AMERICAN NATIONAL STANDARDS INSTITUTE, ASTM. E283–73 WITH A PRESSURE DIFFERENTIAL OF 1.57 POUNDS PER SQUARE FOOT, AND SHALL BE CERTIFIED AND LABELED.
8. ESCAPE OR RESCUE WINDOW SHALL HAVE A NET CLEAR OPENING NOT LESS THAN 5.7 SQUARE FEET. THE NET CLEAR HEIGHT OPENING SHALL NOT BE LESS THAN 24 INCHES AND THE NET CLEAR WITH NO LESS THAN 20 INCHES. THE NET CLEAR OPENING DIMENSIONS REQUIRED TO BE OBTAINED BY THE NORMAL OPERATION OF THE EMERGENCY ESCAPE AND RESCUE OPENING FROM THE INSIDE THE WINDOW SHALL HAVE THE BOTTOM OF THE CLEAR OPENING NOT GREATER THAN 44 INCHES MEASURED FROM THE FLOOR. (CBC SECTIONS 1031.3.1 ,1031.3.3)
9. BARS, GRILLES, COVERS, SCREENS OR SIMILAR DEVICES ARE PERMITTED TO BE PLACED OVER EMERGENCY ESCAPE AND RESCUE OPENINGS, BULKHEAD, ENCLOSURES, OR WINDOW WELLS THAT SERVES SUCH OPENINGS, PROVIDED THE MINIMUM NET CLEAR OPENING SIZE COMPLIES WITH SECTION 1031.2.1 AND SUCH DEVICES SHALL BE RELEASABLE OR 1031.3.3 REMOVABLE FROM THE INSIDE WITHOUT THE USE OF A KEY, TOOL, SPECIAL KNOWLEDGE, OR FORCE, GREATER THAN THAT WHICH IS REQUIRED FOR NORMAL OPERATION OF THE ESCAPE AND RESCUE OPENING. THE RELEASE MECHANISM FOR NORMAL OPERATION OF THE ESCAPE AND RESCUE OPENINGS. THE RELEASE MECHANISM SHALL BE MAINTAINED OPERABLE AT ALL TIMES.
    - A. SUCH BARS, GRILLS, GRATES, OR ANY SIMILAR DEVICES SHALL BE EQUIPPED WITH AN APPROVED EXTERIOR RELEASE DEVICE FOR USE BY THE FIRE DEPARTMENT ONLY WHEN REQUIRED BY AUTHORITY JURISDICTION WHERE SECURITY BARS, (BURGLAR BARS) ARE INSTALLED ON EMERGENCY EGRESS AND RESCUE WINDOWS OR DOOR SUCH DEVICES SHALL COMPLY WITH CALIFORNIA BUILDING STANDARDS, CODE, PART 12, CHAPTER 12–3, AND OTHER APPLICABLE PROVISIONS OF THIS CODE (CBC SECTION 1031.5)
10. ALL HABITABLE ROOM, SHALL HAVE AN AGGREGATED GLAZING AREA OF NOT LESS THAN 8 PERCENT OF THE FLOOR AREA OF SUCH ROOMS. NATURAL VENTILATION, SHALL BE THROUGH WINDOWS, DOORS, LOUVERS, OR OTHER APPROVED OPENINGS TO THE OUTDOOR AIR. SUCH OPENING SHALL BE PROVIDED READY ACCESS, OR SHALL OTHERWISE BE READILY CONTROLLED BY THE BUILDING OCCUPANTS. (CBC SEC. 1202.5.)
11. ALL HABITABLE ROOMS MINIMUM OPENABLE AREA TO THE OUTDOOR SHOWER BE 4 PERCENT OF THE FLOOR AREA BEING VENTLESS. (CBC SECTION 1202.5.1) WHERE ROOMS AND SPACES WITHOUT OPENINGS TO THE OUTDOORS ARE VENTILATED THROUGH AN ADJOINING ROOM, THE OPENING TO THE ADJOINING ROOM SHALL BE UNOBSTRUCTED AND SHALL HAVE AN AREA OF NOT LESS THAN 8 PERCENT OF THE FLOOR AREA OF THE INTERIOR ROOM OR SPACE, BUT NOT LESS THAN 25 SQUARE FEET . THE OPENABLE AREA OF THE OPENINGS TO THE OUTDOORS SHALL BE BASED ON THE TOTAL FLOOR AREA BEING VENTILATED. (CBC SECTION 1202.5.1.1)
12. ROOMS CONTAINING BATHTUBS, SHOWERS, SPAS AND SIMILAR BATHING FIXTURES SHALL BE MECHANICALLY VENTILATED IN ACCORDANCE WITH THE CALIFORNIA MECHANICAL CODE. THE MINIMUM EXHAUST RATE SHALL NOT BE LESS THAN THAT ESTABLISHED BY TABLE 403.7 "MINIMUM EXHAUST RATES." SEE CALIFORNIA MECHANICAL CODE, CHAPTER 5, FOR ADDITIONAL PROVISIONS RELATED TO ENVIRONMENTAL AIR DUCTS.
[HCD 1] IN ADDITION TO THE REQUIREMENTS IN THIS SECTION AND IN THE CALIFORNIA MECHANICAL CODE, BATHROOMS IN GROUP R OCCUPANCIES SHALL BE MECHANICALLY VENTILATED IN ACCORDANCE WITH THE CALIFORNIA GREEN BUILDING STANDARDS CODE (CALGREEN), CHAPTER 4, DIVISION 4.5. (CBC SECTION 1202.5.2.1)

GLAZING

1. GLAZING SUBJECT TO HUMAN IMPACT SHALL COMPLY WITH CBC SECTION 2401
2. EXCEPT AS INDICATED IN SECTION 2406.3.1 EACH PANE OF GLAZING INSTALLED IN HAZARDOUS LOCATION AS DEFINED IN SECTION 2406.4 SHALL BE PROVIDED WITH THE MANUFACTURES DESIGNATION SPECIFYING WHO APPLIED THE DESIGNATION, DESIGNATING THE TYPE OF GLASS, AND THE SAFETY GLAZING[9] STANDARD WITH WHICH IT COMPLIES, WHICH IS VISIBLE IN THE FINAL INSTALLATION. THE DESIGNATION TYPE SHALL BE OF A TYPE WHICH ONCE APPLIED CANNOT BE REMOVED WITHOUT BEING DESTROYED. A LABEL SHALL BE PERMITTED IN LIEU OF MANUFACTURES DESIGNATION (CBC SECTION 2403.1)
3. THE FOLLOWING SHALL BE CONSIDERED SPECIFIC HAZARDOUS LOCATIONS FOR THE PURPOSES OF GLAZING:
    - A. GLAZING IN FIX AN OPERABLE PANELS OF SWINGING, SLIDING AND BIFOLD DOORS, EXCEPT LOUVERED WINDOWS AND JALOUSIES PER SECTION 2406.1 EXCEPTION. GLAZING IN FIXED, OR OPERABLE PANELS ADJACENT TO A DOOR SHALL BE CONSIDERED HAZARDOUS LOCATION WHERE THE BOTTOM EXPOSED EDGE OF THE GLAZING IS LESS THAN 60 INCHES ABOVE THE FLOOR, OR WALKING SURFACE AND MEETS THE FOLLOWING CONDITIONS:
        - a. GLAZING IS WITHIN 24 INCHES OF EITHER SIDE OF THE DOOR IN THE PLANE OF THE DOOR IN A CLOSED POSITION
        - b. WHERE THE GLAZING IS ON THE WALL LESS THAN 180 DEGREES FROM THE PLANE OF THE DOOR IN A CLOSED POSITION AND WITHIN 24 INCHES OF THE HINGE SIDE OF IN SWINGING DOOR
    - B. GLAZING IN FIXED OR OPERABLE PANEL THAT MEETS ALL CONDITIONS:
        - a. EXPOSED AREA OF AN INDIVIDUAL PANE GREATER THAN 9 SQ. FT.
        - b. EXPOSED BOTTOM EDGE LESS THAN 18 INCHES ABOVE THE FLOOR
        - c. EXPOSED TOP EDGE, GREATER THAN 36 INCHES ABOVE THE FLOOR
        - d. ONE OR MORE WALKING SERVICES WITHIN 36 INCHES MEASURED HORIZONTALLY AND IN A STRAIGHT LINE OF GLAZING
    - C. GLAZING IN GUARDS AND RAILINGS, INCLUDING STRUCTURAL BALUSTER, PANELS, AND NONSTRUCTURAL INFILL PANELS, REGARDLESS OF AREA OR HEIGHT ABOVE A WALKING SURFACE.
    - D. GLAZING IN WALLS, ENCLOSURES OR FENCES CONTAINING OR FACING HOT TUBS, SPA, WHIRLPOOLS, SAUNAS, STEAM ROOMS, BATHTUBS, SHOWERS INDOORS OR OUTDOOR SWIMMING POOLS WHERE THE BOTTOM EXPOSED EDGE OF THE GLAZING IS LESS THAN 60 INCHES MEASURED VERTICALLY ABOVE ANY STANDING OR WALKING SURFACE.
    - E. GLAZING ADJACENT TO THE STAIRWAYS AND RAMPS WHERE THE BOTTOM EXPOSED EDGE OF THE GLAZING IS LESS THAN 36 INCHES ABOVE THE PLANE OF THE ADJACENT WALKING SURFACE OF STAIRWAYS, LANDINGS BETWEEN FLIGHTS OF STAIRS AND RAMPS.
    - F. GLAZING ADJACENT TO THE LANDING AT THE BOTTOM OF THE STAIRWAY WHERE THE GLAZING IS LESS THAN 36 INCHES ABOVE THE LANDING AND WITHIN 60 INCHES HORIZONTAL ARC LESS THAN 180 DEGREES FROM THE BOTTOM TREAD NOSING.

GLAZING (CONT.)

- H. GLAZING IN ALL UNFRAMED SWINGING DOORS
- I. GLAZING IN STORM DOORS
(CBC SECTION 2406.2) SEE SECTION FOR EXCEPTIONS

5. GLAZING IN WARDROBE DOOR SHALL MEET THE IMPACT TEST REQUIREMENTS FOR SAFETY GLAZING AS SET FORTH IN THE CBC TABLES 2406.2(1) AND OUR 2406.2(2) PLASTIC GLAZING SHALL MEET THE WEATHERING REQUIREMENTS OF ANSI Z97.1.
6. MIRROR SHALL BE A MINIMUM OF 3/16 INCH POLISHED PLATE GLASS
7. REGULAR, FLOAT, WIRED AND PATTERN GLASS IN JALOUSIES AND LOUVERED WINDOW SHALL BE, NOT LESS THAN NOMINAL 3/16 INCH AND NOT MORE THAN 48 INCH IN LENGTH. EXPOSED GLASS EDGES SHALL BE SMOOTH. (CBC SECTION 2403.5)
8. GLAZING SUPPORT AND FRAMING SHALL COMPLY WITH CBC SECTIONS 2403.2 AND 2403.3
9. HINGED SHOWER DOOR SHALL OPEN OUTWARD
10. GLAZING SHALL BE IN ACCORDANCE WITH ENERGY COMPLIANCE CALCULATIONS, CALIFORNIA ENERGY CODE (TITLE 24).

09 -FINISHES

GYPSUM BOARD

1. GYPSUM WALLBOARD SHALL BE INSTALLED IN CONFORMANCE WITH THE CURRENT EDITION OF THE CALIFORNIA BUILDING CODE AND ALL STATE AND LOCAL BUILDING CODES. THE MOST STRINGENT REQUIREMENT SHALL GOVERN.
2. GYPSUM WALLBOARD SHALL NOT BE INSTALLED UNTIL WEATHER PROTECTION FOR THE INSTALLATION IS PROVIDED. EXTERIOR SHEATING SHALL BE DRY BEFORE APPLYING EXTERIOR COVER. (CBC SECTION 1404)
3. ALL EDGES AND ENDS OF GYPSUM WALLBOARD SHALL OCCUR ON THE FRAMING MEMBERS, EXCEPT THOSE EDGES AND ENDS THAT ARE PERPENDICULAR TO THE FRAMING MEMBERS (CBC SECTION 2508.3)
4. GYPSUM BOARD AND GYPSUM PANEL PRODUCTS SHALL BE INSTALLED PERPENDICULAR TO CEILING FRAMING MEMBERS. END JOINTS OF ADJACENT COURSES OF BOARD AND PANELS SHALL NOT OCCUR ON THE SAME JOIST. (CBC SECTION 2508.6)
5. FASTENERS SHALL BE SPACED, NOT MORE THAN 7 INCHES ON CENTER AT ALL SUPPORTS, INCLUDING PERIMETER, BLOCKING, AND NOT LESS THAN 3/8 INCH FROM THE EDGES AND ENDS OF THE GYPSUM BOARD (CBC SECTION 2508.6.4)
6. GYPSUM BOARD, GYPSUM PANEL PRODUCTS AND ACCESSORIES SHALL BE IDENTIFIED BY THE MANUFACTURER'S DESIGNATION TO INDICATE COMPLIANCE WITH THE APPROPRIATE STANDARDS REFERENCED IN CBC SECTION 2506.1 AND STORED TO PROTECT SUCH MATERIALS FROM THE WEATHER. GYPSUM BOARD AND GYPSUM PANEL PRODUCTS SHALL CONFORM TO THE APPROPRIATE STANDARDS LISTED IN TABLE 2506.2 AND CHAPTER 35 AND, WHERE REQUIRED FOR FIRE PROTECTION, SHALL CONFORM TO THE PROVISIONS OF CBC CHAPTER 7. (CBC SECTION 2506.2)
7. SUPPORTS AND FASTENERS USED TO ATTACH GYPSUM BOARD AND GYPSUM PANEL PRODUCT SHALL COMPLY WITH TABLE 2508.6 (CBC SECTION 2508.6)
8. WHERE TWO LAYERS OF GYPSUM WALLBOARD ARE REQUIRED, THE BASE LAYER OF GYPSUM WALLBOARD SHALL BE APPLIED WITH FASTENERS OF THE TYPE AND SIZE AS REQUIRED FOR THE NON-ADHESIVE APPLICATION OF SINGLE PLY GYPSUM WALLBOARD
9. MATERIALS USED AS A BASE FOR WALL TILE IN TUB AND SHOWER AREAS AND WALL AND CEILING PANELS IN SHOWER AREAS SHALL BE OF MATERIALS LISTED IN TABLE 2509.2 AND INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. (CBC SECTION 2509.2)
10. WATER-RESISTANT GYPSUM BACKING BOARD SHALL BE USED AS A BASE FOR TILE IN WATER CLOSET COMPARTMENT WALLS WHEN INSTALLED IN ACCORDANCE WITH GA-216 OR ASTM C840 AND THE MANUFACTURER'S RECOMMENDATIONS. REGULAR GYPSUM WALLBOARD IS PERMITTED UNDER TILE OR WALL PANELS IN OTHER WALL AND CEILING AREAS WHEN INSTALLED IN ACCORDANCE WITH GA-216 OR ASTM C840. (CBC SECTION 2509.2)
11. WATER RESISTANT GYPSUM BACKING BOARD USED ON BASE OR BACKER FOR ADHESIVE APPLICATION OF CERAMIC TILE OR OTHER REQUIRED NONABSORBENT FINISH MATERIAL SHALL CONFIRM TO ASTM C1396, C1178, OR C1278. USE OF WATER RESISTANT GYPSUM, BACKING BOARD SHALL BE PERMITTED ON CEILINGS. CUT OR EXPOSED EDGES, INCLUDING THOSE AT WALL INTERSECTIONS SHALL BE SEALED AS RECOMMENDED BY MANUFACTURER (CBC SECTION 2509.2).
12. WATER RESISTANT GYPSUM, WALLBOARD SHALL NOT BE USED IN FOLLOWING LOCATIONS:
    - A. OVER A CLASS I OR II VAPOR RETARDER IN SHOWER OR TUB COMPARTMENT
    - B. IN AREAS WHERE THERE WILL BE DIRECT EXPOSURE TO WATER, OR AN AIR IS SUBJECT TO CONTINUOUS HUMIDITY. (CBC SECTION 2509.2 & 2509.3)

METAL LATH

1. ALL LATH AND LATH ATTACHMENTS SHALL BE OF CORROSION RESISTANT MATERIAL
2. BACKING OR A LATH SHALL PROVIDE SUFFICIENT RIGIDITY TO PERMIT PLASTER APPLICATION
3. ALL LATH AND LATH ATTACHMENTS SHALL BE OF CORROSION RESISTANT MATERIALS. EXPANDED METAL OR WOVEN WIRE LATCH SHALL BE ATTACHED WITH 1 1/2 INCH LONG, II GAGE NAILS HAVING A 7/16 INCH HEAD OR 7/8 INCH LONG, 16 GAGE STAPLES, SPACED NO MORE THAN 6 INCHES OR AS OTHERWISE (CBC SECTION 2507.1)
4. GYPSUM LATH OR GYPSUM BOARD SHALL NOT BE USED AS BACKING, EXCEPT THAT ON HORIZONTAL SUPPORTS OF CEILING OR ROOF SOFFITS. IT MAY BE USED AS BACKING FOR METAL LATH, OR WIRE, FABRIC LATH AND CEMENT PLASTER.
5. METAL LATH OR WIRE FABRIC LATH SHALL BE APPLIED WITH A LONG DIMENSION OF THE SHEETS PERPENDICULAR TO SUPPORTS.
6. WHERE END LAPS OF SHEET DO NOT OCCUR OVER SUPPORTS, THEY SHOULD BE SECURELY TIED TOGETHER WITH NOT LESS THAN 0.049 INCH. (NO. 18 BW GAGE) WIRE .
7. CORNERITE SHALL BE INSTALLED IN ALL THE INTERNAL CORNERS TO RETAIN POSITION DURING PLASTERING. CORNERITE MAY BE OMITTED WHEN LATH IS CONTINUOUS OR WHEN PLASTER IS NOT CONTINUOUS FROM ONE PLANE TO AN ADJACENT PLANE.
8. LATHING AND PLASTERING MATERIALS SHALL CONFORM TO THE STANDARDS LISTED IN TABLE 2507.2 AND CHAPTER 35 AND, WHERE REQUIRED FOR FIRE PROTECTION, SHALL CONFORM TO THE PROVISIONS OF CHAPTER 7
9. WHERE NO EXTERNAL CORNER OF REINFORCEMENT IS USED, LATH SHALL BE FURRED OUT AND CARRIED AROUND CORNERS AT LEAST ONE SUPPORT ON FRAME CONSTRUCTION .
10. WEEP SCREED, A MINIMUM 0.019 INCH (NO. 26 GALVANIZED SHEET GAGE) CORROSION RESISTANT WEEP SCREED WITH A MINIMUM VERTICAL ATTACHMENT FLANGE OF 3 1/2 INCHES SHALL BE PROVIDED AT OR BELOW THE FOUNDATION PLATE LINE ON ALL EXTERIOR STUD WALLS IN ACCORDANCE WITH ASTM C926. THE WEEP SCREED SHALL BE PLACED NOT LESS THAN 4 INCHES ABOVE THE EARTH, OR 2 INCHES ABOVE PAVED AREA IS AND SHALL BE OF A TYPE THAT WILL ALLOW TRAPPED WATER TO DRAIN THE EXTERIOR OF THE BUILDING. THE WEATHER RESISTANT BARRIER SHALL LAP THE ATTACHMENT FLANGE. THE EXTERIOR LATH SHALL COVER AND TERMINATE ON THE ATTACHMENT FLANGE OF WEEP SCREED (CBC SEC 2512.1.2).

CEMENT PLASTERING

1. PLASTERING WITH PORTLAND CEMENT PLASTER SHALL NOT BE LESS THAN THREE COATS WHEN APPLIED OVER METAL LATH OR WIRE LATH, AND SHALL NOT BE LESS THAN TWO COATS WHEN APPLIED OVER MASONRY, CONCRETE OR GYPSUM BACKING AS SPECIFIED (CBC SEC 2509.2)
2. ON WOOD FRAME OR STEEL STUD CONSTRUCTION WITH AN ON-GRADE CONCRETE FLOOR SLAB SYSTEM, EXTERIOR PLASTER SHALL BE APPLIED TO COVER, BUT NOT EXTEND BELOW, LATH, PAPER, AND SCREED. PAPER THE APPLICATION OF LATH, PAPER AND FLASHING OR DRIP SCREEDS SHALL COMPLY WITH ASTM C926, AND ASTM C1063. (CBC SEC 2510
3. ONLY APPROVED PLASTICITY AGENTS AND APPROVED AMOUNTS THEREOF MAY BE ADDED TO PORTLAND CEMENT. WHEN PLASTIC CEMENT OR MASONRY CEMENT IS USED, NO ADDITIONAL LIME OR PLASTICISER SHALL BE ADDED. HYDRATED LIME, OR THE EQUIVALENT AMOUNT OF LINE PUTTY USED AS PLASTICISER IS PERMITTED TO BE ADDED TO CEMENT, PLASTER OR CEMENT IN LIME PLASTER IN AN AMOUNT NOT TO EXCEED THAT SET FORTH IN ASTM C926. (CBC SEC 2512.2)
4. GYPSUM PLASTER SHALL NOT BE USED ON EXTERIOR SURFACES. (CBC 2512.3)
5. PLASTERING WITH CEMENT PLASTER SHALL BE NOT LESS THAN THREE COATS WHERE APPLIED OVER METAL LATH OR WIRE FABRIC LATH OR GYPSUM BOARD BACKING AS SPECIFIED IN SECTION 2510.5 AND SHALL BE NOT LESS THAN TWO COATS WHERE APPLIED OVER MASONRY OR CONCRETE. IF THE PLASTER SURFACE IS TO BE COMPLETELY COVERED BY VENEER OR OTHER FACING MATERIAL, OR IS COMPLETELY CONCEALED BY ANOTHER WALL, PLASTER APPLICATION NEED ONLY BE TWO COATS, PROVIDED THAT THE TOTAL THICKNESS IS AS SET FORTH IN ASTM C926. (CBC 2512.2)
6. CEMENT PLASTER MATERIALS SHALL CONFORM TO ASTM C91. (TYPE M, S OR N), C150 (TYPE I. II AND III) C595 (TYPE IP, I (PM), IS AND I (SM), C847, C897, C926, C1032, C1047, AND C1328, AND SHALL BE INSTALLED OR APPLIED IN CONFORMANCE WITH ASTM C1063. GYPSUM LATH SHALL CONFORMS TO ASTM C1396. PLASTER SHALL NOT BE LESS THAN THREE COATS WHERE APPLIED OVER METAL LATH AND NOT LESS THAN TWO COATS WHERE APPLIED OVER OTHER BASES PERMITTED BY THIS SECTION, EXCEPT THAT VENEER PLASTER SHALL BE APPLIED IN ONE COAT NOT TO ACCEPT 3/16 INCH THICKNESS PROVIDED THE TOTAL THICKNESS IS IN ACCORDANCE WITH TABLE OR (CBC SEC 2511.1/ 2511.1.1)
7. APPLICATIONS INSTALLED IN ACCORDANCE WITH ASTM C926. EACH COAT SHALL BE KEPT MOIST CONDITION FOR AT LEAST 48 HOURS PRIOR TO APPLICATION OF THE NEXT COAT. (CBC SEC 2510)
8. THE FINISH COAT FOR TWO-COAT CEMENT PLASTER SHALL NOT BE APPLIED SOONER THAN SEVEN DAYS AFTER APPLICATION OF THE FIRST COAT. FOR THREE-COAT CEMENT PLASTER, THE SECOND COAT SHALL NOT BE APPLIED SOONER THAN 48 HOURS AFTER APPLICATION OF THE FIRST COAT. THE FINISH COAT FOR THREE-COAT CEMENT PLASTER SHALL NOT BE APPLIED SOONER THAN SEVEN DAYS AFTER APPLICATION OF THE SECOND COAT. (CBC SEC 2510.6)
9. COLOR AND FINISH TO BE SELECTED AND APPROVED BY OWNER / BUILDER.
10. A ONE-COAT EXTERIOR PLASTER SYSTEM "OMEGA DIAMOND WALL" AND DIAMOND WALL INSULATING EXTERIOR STUCCO SYSTEM ICC NO. ESR-1194 OR APPROVED OR EQUAL MAY BE USED IN LIEU OF THE 3-COAT EXTERIOR PLASTER SYSTEM.
11. FOAM INSULATION BOARD USED IN ONE-COAT EXTERIOR PLASTER SYSTEM SHALL CONFORM TO THE REQUIREMENTS CBC CHAPTER 14.
12. THE EXTERIOR OF THE BUILDING SHALL BE SEPARATED FROM THE FOAM PLASTIC INSULATION BY AN APPROVED THERMAL BARRIER. WATER-RESISTIVE BARRIER SHALL COMPLY WITH CBC 1407.4.1.1 ASTM E2570 (CBC 1403.2). INSTALLATION OF WATER RESISTIVE BARRIER SHALL BE APPLIED BETWEEN THE EIFS AND THE WALL SHEATHING. (CBC 1407.4.1.1)

21 -FIRE SEPARATION

1. PRIVATE GARAGE SHALL BE SEPARATED FROM THE DWELLING UNIT AND IT'S ATTIC AREA BY MEANS OF A MINIMUM 1/2 INCH GYPSUM BOARD APPLIED TO THE GARAGE SIDE FOR CBC SEC 406.3.2.1. OPENINGS IN GARAGE WALLS SHALL COMPLY WITH SECTION 406.3.2 ATTACHMENT OF GYPSUM BOARD SHALL COMPLY WITH CBC SEC 2508 (CBC SECTION 406.3.2.1)
2. PROVIDE ONE LAYER OF 5/8 INCH 'X' GYPSUM WALLBOARD AT GARAGE CEILING, SIDE, AND BENEATH ALL HABITABLE ROOMS AND STRUCTURAL SUPPORTING FRAMING MEMBERS (CBC SECTION 406.3.2.1)
3. ENCLOSED ACCESSIBLE SPACE UNDER STAIRS SHALL HAVE WALLS, UNDER STAIRS SURFACE AND ANY SOFFITS PROTECTED ON ENCLOSED SIDE, 1/2" GYPSUM BOARD (CBC SECTION 1011.7.3)

22 -PLUMBING

1. ALL MATERIALS AND EQUIPMENT, INSTALLATION AND CONSTRUCTION METHODS SHALL COMPLY WITH THE MOST CURRENT ADOPTED EDITION OF THE CALIFORNIA PLUMBING CODE, OR THE CURRENT LOCALLY ADOPTED PLUMBING CODE.
2. NO PLUMBING FIXTURE, DEVICE, OR CONSTRUCTION SHALL BE INSTALLED OR MAINTAINED OR SHALL BE CONNECTED TO ANY DOMESTIC WATER SUPPLY WHEN SUCH INSTALLATION OR CONNECTION MAY PROVIDE A POSSIBILITY OF POLLUTING SUCH WATER SUPPLY OR MAY PROVIDE A CROSS-CONNECTION BETWEEN A DISTRIBUTING SYSTEM OF WATER FOR DRINKING AND DOMESTIC PURPOSES AND WATER WHICH MAY BECOME CONTAMINATED BY SUCH PLUMBING FIXTURES, DEVICE, OR CONSTRUCTION, UNLESS THERE IS PROVIDED A BACKFLOW PREVENTION DEVICE APPROVED FOR THE POTENTIAL HAZARD (CPC SECTION 602.3)WHERE PLUMBING FIXTURES ARE INSTALLED FOR PRIVATE USE HOT WATER SHALL BE REQUIRED FOR BATHING, WASHING, LAUNDRY, COOKING PURPOSES, DISHWASHING OR MAINTENANCE (CPC SECTION 601.2)
3. PORTABLE WATER OUTLETS WITH HOSE ATTACHMENT, OTHER THAN WATER HEATER DRAINS AND CLOTHES WASHER CONNECTIONS SHALL BE PROTECTED BY A LISTED NON-REMOVAL HOSE BIB TYPE BACKFLOW, PREVENTER, NON-REMOVABLE, HOSE BIB TYPE VACUUM BREAKER, OR AN ATMOSPHERIC VACUUM BREAKER INSTALLED NOT LESS THAN 6 INCHES ABOVE HIGHEST POINT OF USAGE LOCATED ON DISCHARGE SIDE OF THE LAST VALVE IN CLIMATES WHERE FREEZING TEMPERATURES OCCUR. A LISTED SELF-DRAINING, FROST-PROOF HOSE BIB WITH AN INTEGRAL BACKFLOW PREVENTER OR VACUUM BREAKER SHALL BE USED (CPC SECTION 603.5.7)
4. COPPER OR COPPER ALLOY TUBE FOR WATER PIPING SHALL HAVE WEIGHT, NOT LESS THAN TYPE L. EXCEPTION: TYPE M COPPER OR COPPER ALLOY TUBING SHALL BE PERMITTED TO BE USED FOR WATER PIPING WHERE PIPING IS ABOVEGROUND IN OR ON A BUILDING OR UNDERGROUND OUTSIDE OF STRUCTURES (CPC SECTION 604.3)
5. APPROVED PLASTIC MATERIALS SHALL BE PERMITTED TO BE USED IN BUILDING SUPPLY PIPING, PROVIDED THAT WHERE METAL BUILDING SUPPLY PIPING IS USED FOR ELECTRICAL GROUNDING PURPOSES, REPLACEMENT PIPING THERE OF SHALL BE OF LIKE MATERIALS. (CPC SECTION 604.3)
6. PIPING PASSING UNDER OR THROUGH WALLS SHALL BE PROTECTED FROM BREAKAGE PIPING, PASSING THROUGH OR UNDER CINDERS OR OTHER CORROSIVE MATERIALS SHALL BE PROTECTED FROM EXTERNAL CORROSION IN ANY APPROVED MATTER. APPROVED PROVISION SHALL BE MADE FOR EXPANSION OF HOT WATER PIPING. VOIDS AROUND CONCRETE FLOORS ON THE GROUND SHALL BE APPROPRIATELY SEALED (CPC SECTION 312.1)
7. PIPING IN CONNECTION WITH PLUMBING SYSTEM SHALL BE INSTALLED SO THAT PIPING OR CONNECTION WILL NOT BE SUBJECT TO UNDER STRAINS OR STRESSORS AND PROVISION SHALL BE MADE FOR EXPANSION, CONTRACTION, AND STRUCTURAL SETTLEMENT. NO PLUMBING PIPING SHALL BE DIRECTLY EMBEDDED IN CONCRETE OR MASONRY. NO STRUCTURAL MEMBERS SHALL BE SERIOUSLY WEEKEND OR IMPAIRED BY CUTTING NOTCHING OR OTHERWISE (CPC SECTION 312.2
8. PROTECTIVELY, COATED PIPE, OR TUBING SHALL BE INSPECTED AND TESTED, AND ANY VISIBLE VOID DAMAGE OR IMPERFECTION TO THE PIPE COATING SHALL BE REPAIRED IN AN APPROVED MANNER
9. NO WATER, SOIL, OR WASTE PIPE SHALL BE INSTALLED OR PERMITTED OTHERWISE OF A BUILDING, AN ATTIC OR CRAWL SPACES, OR IN AN EXTERIOR WALL, UNLESS WERE NECESSARY ADEQUATE PROVISION IS MADE TO PROTECT SUCH PIPE FROM FREEZING (CPC SECTION 312.6)
10. ALL PIPING PENETRATIONS OF FIRE RESISTANCE RATED WALLS, PARTITIONS, FLOORS, FLOOR/CEILING, ASSEMBLIES, ROOF/CEILING, ASSEMBLIES, OR SHAFT REQUIREMENTS SHALL BE PROTECTED IN ACCORDANCE WITH THE REQUIREMENTS OF CALIFORNIA BUILDING CODE IN CALIFORNIA RESIDENTIAL CODE (CPC SECTION 312.7)
11. MATERIALS FOR DRAINAGE PIPING SHALL BE IN ACCORDANCE WITH ONE OF THE REFERENCED STANDARDS IN TABLE 701.2 (CPC SEC 701.2) ABS AND PVC DVM PIPING INSTALLATIONS SHALL BE INSTALLED IN ACCORDANCE WITH APPLICABLE STANDARD REFERENCED IN TABLE 1701.2 AND THE FIRESTOP PROTECTION REQUIREMENTS IN CALIFORNIA BUILDING CODE.ABS AND PVC INSTALLATIONS ARE LIMITED TO NOT MORE THAN TWO STORIES OF AREAS OF RESIDENTIAL ACCOMMODATION (CPC SECTIONS 701.2(2) AND 701.2(2)(A))
12. MATERIALS FOR DRAINAGE FITTINGS SHALL BE IN ACCORDANCE WITH THE APPLICABLE STANDARDS REFERENCED IN TABLE 701.2 OF THE SAME DIAMETER AS THE PIPING SERVED AND SUCH FITTINGS SHALL BE COMPATIBLE WITH THE TYPE OF PIPE USED. (CPC SECTION 701.3)
13. WEAR WAIST LINE DROPS OCCUR IN A LOCATION WHERE THE SOUND OF FLUSH TOILET MAY BE UNDESIRABLE, SUCH AS IN WALLS ARE PARTITIONS ADJACENT TO EATING ROOMS, USE CAST IRON TYPING OR SIMILAR APPROVED, HARD OR DENSE PIPING AND/OR INSULATE STUD BAY IN CLOSING PIPE TO MITIGATE SOUND
14. PROVIDE CLEAN OUTS WERE REQUIRED BY THE CALIFORNIA PLUMBING CODE SECTION 707 AND 719
15. ALL GAS PIPING SHALL BE SUPPORTED BY METAL STRAPS OR HOOKS AND INTERVALS NOT EXCEED THOSE SHOWN IN TABLE 1210.2.4.1. (CPC SECTION 313.7)
16. SHOWERS AND TUB SHOWERS COMBINATION SHALL BE PROVIDED WITH INDIVIDUAL CONTROL VALVES OF THE PRESSURE BALANCE, THERMOSTATIC, OR COMBINATION PRESSURE, BALANCE/THERMOSTATIC MIXING VALVE TYPE THAT PROVIDE SCALD AND THERMAL SHOCK PROTECTION FOR THE RATED FLOW RATE OF THE INSTALLED SHOWER HEAD. THESE VALVES SHALL BE INSTALLED AT THE POINT OF USE AND COMPLY WITH ASSE 1016/ASME A112.1016/CSA B125.16 OR ASME A112.18.1/CSA B125.1 (CPC SECTION 408.3)
17. WATER HEATER LOCATED IN RESIDENTIAL GARAGE AND IN ADJACENT SPACES THAT OPEN IN GARAGE AND ARE NOT PART OF THE LIVING. SPACE OF A DWELLING UNIT SHALL BE INSTALLED SO THAT ALL BURNERS AND BURNER IGNITION DEVICES ARE LOCATED NOT LESS THAN 18 INCHES ABOVE THE FLOOR UNLESS LISTED AS FLAMMABLE VAPOR IGNITION RESISTANT (CPC SEC 507.13)
18. ALL WATER HEATERS INSTALLED IN GARAGES, WAREHOUSES, OR OTHER AREAS SUBJECT TO MECHANICAL DAMAGE SHALL BE GUARDED AGAINST SUCH DAMAGE BY BEING INSTALLED BEHIND PROTECTIVE BARRIERS, OR BY BEING ELEVATED OR LOCATED OUT OF THE NORMAL PATH OF VEHICLES. (CPC SEC 307.13.1)
19. WHEN A WATER HEATER IS LOCATED IN AN ATTIC IN OR ON AN ATTIC CEILING, ASSEMBLY, FLOOR-CEILING, ASSEMBLY OR FLOOR-SUBFLOOR ASSEMBLY OR DAMAGE MAY RESULT FROM A LEAKING WATER HEATER, A WATER TYPE PAN OF CORROSION RESISTANT MATERIALS SHALL BE INSTALLED BENEATH THE WATER HEATER WITH NOT LESS THAN THREE-QUARTERS (¾) OF AN INCH DIAMETER DRAIN TO AN APPROVED LOCATION. SUCH PAN SHALL BE NOT LESS THAN 1 1/2 INCH IN DEPTH. (CPC SEC 507.5)
20. WATER HEATER SHALL BE PROVIDED WITH AN APPROVED, LISTED, ADEQUATELY SIZED COMBINATION, TEMPERATURE AND PRESSURE RELIEF VALVE, INSTALLED PER MANUFACTURER'S INSTRUCTION, AND SHALL BE PROVIDED WITH A DRAIN TO THE OUTSIDE OF THE BUILDING AS REQUIRED ON SECTION 608.5. (CPC SECTION 608.3)
21. NO DOMESTIC DISHWASHING MACHINE SHALL BE DIRECTLY CONNECTED TO DRAINAGE SYSTEM OR FOOD WASTE DISPOSER WITHOUT THE USE OF AN APPROVED DISHWASHER AIR GAP FITTING ON A DISCHARGE SIDE OF DISHWASHING MACHINE. LISTED AIR GAPS SHALL BE INSTALLED WITH THE FLOOD LEVEL (FL) MARKING AT OR ABOVE THE FLOOD LEVEL OF THE SINK OR DRAIN BOARD, WHICHEVER IS HIGHER. LISTED AIR GAPS SHALL BE INSTALLED WITH THE FLOOD LEVEL MARQUEE AT OR ABOVE THE FLOOD LEVEL OF THE SINK OR DRAIN BOARD WHICHEVER IS HIGHER. (CPC SECTION 807.3)
22. THE MINIMUM CAPACITY FOR WATER HEATERS SHALL BE IN ACCORDANCE WITH THE FIRST HOUR RATING LISTED IN TABLE 501.1(2) OF THE **2022 CPC**

TABLE 501.1(2)
FIRST HOUR RATING[1]

Number of Bathrooms	1 to 1.5			2 to 2.5				3 to 3.5			
Number of Bedrooms	1	2	3	2	3	4	5	3	4	5	6
First Hour Rating,[2] Gallons	38	49	49	49	62	62	74	62	74	74	74

Notes:
1 The first-hour rating is found on the "Energy Guide" label.
2 Solar water heaters shall be sized to meet the appropriate first-hour rating as shown in the table.

24. LAVATORY FAUCETS SHALL BE DESIGNED AND MANUFACTURES SO THAT THEY WILL NOT EXCEED A WATER FLOW RATE OF 1.2 GALLONS PER MINUTE AT 60 PSI. THE MINIMUM FLOW RATE OF RESIDENTIAL LAVATORY FAUCETS SHALL NOT BE LESS THAN 0.8 GALLONS PER MINUTE AT 20 PSI.(CPC SECTION 407.2.2)
25. FAUCETS FOR KITCHEN, WET BARS, LAUNDRY SINK OR OTHER SIMILAR USE FIXTURES SHALL BE DESIGNED AND MANUFACTURED SO THAT THEY SHALL NOT EXCEED MAXIMUM FLOW RATE OF 1.8 GALLONS PER MINUTE AT 60 PSI. KITCHEN FAUCET MY TEMPORARY INCREASE THE FLOW ABOVE THE MAXIMUM RATE, BUT NOT EXCEED 2.2 GALLONS PER MINUTE AT 60 PSI AND MUST DEFAULT TO A MAXIMUM FLOW RATE OF 1.8 GALLONS PER MINUTE AT 60 PSI (CPC SECTION 420.2.2).
26. SHOWERHEADS DESIGNED AND MANUFACTURED SHALL HAVE A MAXIMUM WATER SUPPLY FLOW RATE OF 1.8 GALLONS PER MINUTE AT 80 PSI AND MUST COMPLY WITH DIVISION 4.3 OF CALGREEN (CPC SEC 408.2).
27. WHERE LOCAL STATIC WATER PRESSURE IN THE WATER SUPPLY PIPING IS EXCEEDED 80 PSI AND APPROVED TYPE PRESSURE REGULATOR PRECEDED BY AN ADEQUATE STRAINER SHALL BE INSTALLED AND THE STATIC PRESSURE REDUCED TO 80 PSI OR LESS. PRESSURE REGULATOR(S) IS EQUAL TO OR EXCEEDING 1 1/2 INCHES SHALL NOT REQUIRE A STRAINER. SUCH REGULATORS SHALL CONTROL THE PRESSURE TO WATER OUTLET IN BUILDING, UNLESS OTHERWISE APPROVED BY AUTHORITY HAVING JURISDICTION. EACH SEARCH REGULATOR STRAINER SHALL BE ACCESSIBLY LOCATED ABOVE GROUND AND SHALL HAVE THE STRAINER READILY ACCESSIBLE FOR CLEANING WITHOUT REMOVING THE REGULATOR OR STRAINER BODY OR DISCONNECTING THE SUPPLY PIPING. PIPE SIZE DETERMINATION SHALL BE BASED ON 80 PERCENT OF THE REDUCED PRESSURE WHEN USING TABLE 610.4. (CPC SECTION 608.2)

23 -HEATING VENTILATING & AIR CONDITIONING

1. ALL MATERIALS AND CONSTRUCTION METHODS SHALL BE IN CONFORMANCE WITH THE 2022 EDITION OF THE CALIFORNIA MECHANICAL CODE
2. ALL EQUIPMENT INSTALLED IN THIS PROJECT SHALL BE IN COMPLIANCE WITH THE STANDARDS LISTED IN THE CALIFORNIA MECHANICAL CODE
3. CONTRACTORS OF DESIGN ENTIRE HVAC SYSTEM AND SUBMIT DRAWINGS FOR OWNER / BUILDERS APPROVAL PRIOR TO ORDERING MATERIALS OR EQUIPMENT.
4. WHERE AIR CONDITIONING IS AN OPTIONAL FEATURE, HEATING SYSTEMS MUST BE DESIRED AND DUCT WORK SIZED TO ACCOMMODATE FUTURE AIR CONDITIONING NEEDS.
5. ANCHORAGE OF APPLIANCES DESIGNED TO BE FIXED IN THE POSITION SHALL BE SECURELY FASTENED IN PLACE ACCORDANCE WITH THE MANUFACTURES INSTALLATION INSTRUCTIONS. SUPPORT FOR APPLIANCES SHALL BE DESIGNED AND CONSTRUCTED TO SUSTAIN VERTICAL AND HORIZONTAL LOAD WITH THE STRESS LIMITATION SPECIFIED IN THE BUILDING CODE (CMC SECTION 303.4.)
6. COMBUSTION AIR SHALL BE PROVIDED FOR FORCED AIR UNITS IN ACCORDANCE WITH CHAPTER 7 OF THE CALIFORNIA MECHANICAL CODE
7. ALL DUCTWORK SHALL CONFORM TO THE REQUIREMENTS OF CHAPTER 6 OF THE CALIFORNIA MECHANICAL CODE.
8. CONTRACTOR TO PROVIDE BOOT IN DUCTWORK WHEN OPTIONAL "HONEYWELL" OR "CARRIER" ELECTRONIC AIR CLEANER IS PROVIDED.
9. DUCTS IN THE GARAGE AND DUCTS PENETRATING THE WALLS OR CEILINGS SEPARATING THE DWELLING UNIT FROM THE GARAGE SHALL BE CONSTRUCTED OF MINIMUM NO.26 GAUGE SHEET STEEL OR OTHER APPROVED MATERIAL AND SHALL HAVE NO OPENINGS INTO THE GARAGE (CBC SECTION 406.3.2.2)
10. EXHAUST DUCTS SHALL TERMINATE OUTSIDE THE BUILDING AND SHALL BE EQUIPPED WITH BACKDRAFT DAMPERS OR WITH MOTORIZED DAMPER THAT AUTOMATICALLY SHUT WHERE THE SYSTEM OR SPACES SERVED ARE NOT IN USE (CMC SECTION 504.1.1)
11. DUCTS USED FOR DOMESTIC KITCHEN RANGE OR COOKTOP VENTILATION SHALL BE OF METAL AND SHALL HAVE SMOOTH INTERIOR SURFACES.
12. REFER TO CMC SECTION 504.3 EXCEPTION FOR THE VENTING OF DOMESTIC KITCHEN DOWNDRAFT GRILLE-RANGES.
13. FLOOR MOUNTED OR BUILT-IN HOUSEHOLD COOKING APPLIANCE SHALL HAVE A VERTICAL CLEARANCE ABOUT COOKING TOP OF NOT LESS THAN 30 INCHES TO COMBUSTIBLE MATERIAL OR METAL CABINETS. A CLEARANCE NOT LESS THAN 24 INCHES IS PERMITTED TO A METAL VENTILATING HOOD (CMC SECTION 920.4.2(1))
14. DOMESTIC CLOTHES DRYER EXHAUST DUCTS, SHALL BE OF RIGID METAL AND SHALL HAVE SMOOTH INTERIOR SURFACES. THE DIAMETER SHALL BE NOT LESS THAN 4 INCHES NOMINAL AND THE THICKNESS SHALL BE NOT LESS THAN 0.016 OF AN INCH (CMC SECTION 504.4.2.) LISTED CLOTHES DRYER TRANSITION DUCTS NOT MORE THAN 6 FEET IN LENGTH SHALL BE PERMITTED TO BE USED TO CONNECT TYPE 1 DRYER TO EXHAUST DUCTS. TRANSITION DUCTS AND FLEXIBLE CLOTHES DRYER, TRANSITION DUCTS SHALL NOT BE CONCEALED WITHIN CONSTRUCTION AND SHALL BE NSTALLED PER MANUFACTURERS INSTRUCTIONS (CMC SECTION 504.4.2.2).
15. CLOTHES DRYER EXHAUST DUCT SHALL TERMINATE OUTSIDE THE BUILDING IN ACCORDANCE WITH SECTION 502.2.1 NOT LESS THAN 3 FEET FROM THE PROPERTY LINE, 10 FEET FROM A FORCED AIR INLET, AND 3 FEET FROM OPENING OF BUILDING ASND SHALL BE EQUIPPED WITH A BACKDRAFT DAMPER. SCREEN SHALL NOT BE INSTALLED AT THE DUCKS TERMINATION. (CMC SECTION 504.4)
16. UNLESS OTHERWISE PERMITTED OR REQUIRED BY THE DRYER MANUFACTURE'S INSTRUCTION AND APPROVED BY THE AUTHORITY HAVING JURISDICTION, DOMESTIC DRYER MOISTURE EXHAUST DUCTS SHALL NOT EXCEED A TOTAL COMBINED HORIZONTAL AND VERTICAL LENGTH OF 14 FEET, INCLUDING TWO 90 DEGREE ELBOWS. A LENGTH OF 2 FEET SHALL BE DEDUCTED FOR EACH 90 DEGREE ELBOWS IN EXCESS OF TWO. (CMC SECTION 504.4.2.1)
17. WHEN A CLOSET IS DESIGNED FOR THE INSTALLATION OF CLOTHES DRYER, AN OPENING OF NOT LESS THAN 100 SQUARE INCHES FOR MAKE UP AIR SHALL BE PROVIDED IN THE DOOR OR BY OTHER APPROVED MEANS (CMC 22 SECTION 504.4.1(1))
18. DOMESTIC WATER HEATERS UNLESS SPECIFIED OTHERWISE BY THE MANUFACTURES INSTALLATION INSTRUCTION, SHALL BE VENTED TO THE OUTSIDE AIR BY A TYPE "B" (CMC 802.2) WHEN USING A TYPE "B" VENT TO USE A STRAIGHT PIPE BETWEEN THE OUTSIDE TERMINATION POINT AND THE AND THE SPACE WHERE THE WATER HEATER IS INSTALLED (CEC 150.0 (N)IB)
19. TYPE "B" SHALL COMPLY WITH THE REQUIREMENTS FOR GRAVITY, VENTING IN THE CMC SECTION 802.6.3.
20. TYPE "B" EVENTS SHALL TERMINATE IN ACCORDANCE WITH CMC SECTION 802.6 AND CMC FIGURE 802.6.1.

26 -ELECTRICAL

1. ALL MATERIALS AND APPLIANCES, INSTALLATION AND CONSTRUCTION METHODS SHALL COMPLY WITH THE CURRENT CALIFORNIA ELECTRICAL CODE
2. ALL ELECTRICAL SYSTEMS, CIRCUITS FIXTURES, AND EQUIPMENT SHALL BE GROUNDED IN A MANNER COMPLYING WITH ARTICLE 250 OF THE CALIFORNIA ELECTORAL CODE
3. ALL WIRING SHALL BE INSTALLED THAT, WHEN COMPLETED, THE SYSTEM WILL BE FREE FROM SHORT CIRCUIT AND FROM GROUND FAULT, OR ANY CONNECTIONS TO GROUND OTHER THAN REQUIRED OR PERMITTED ON CEC ARTICLE 250 (CEC ARTICLE 110.7)
4. ELECTRICAL EQUIPMENT SHALL BE INSTALLED IN NEAT AND WORKMANLIKE MANNER (CEC ARTICLE 110.12)
5. RECEPTACLE OUTLET SHALL BE LOCATED IN BRANCH CIRCUIT IN ACCORDANCE WITH PART III OF ARTICLE 210. (CEC ARTICLE 210.4 (A)) WHERE CONNECTED TO A BRANCH CIRCUIT SUPPLYING TWO OR MORE RECEPTACLES OR OUTLETS.
6. A RECEPTACLE SHALL NOT SUPPLY A TOTAL CORD-AND-PLUG-CONNECTED LOAD IN EXCESS OF THE MAXIMUM SPECIFIED IN TABLE 210.21(B)2. RECEPTACLE RATINGS SHALL CONFORM TO THE VALUES IN TABLE 210.21(B)3, OR WHERE LARGER THAN 50 AMPERES, THE RECEPTACLE RATING SHALL NOT BE LESS THAN BRANCH-CIRCUIT RATINGS. (CEC ARTICLE 210.21(B) RECEPTACLES (2) AND (3)
7. ALL 125-VOLT, SINGLE-PHASE, 15- AND 20-AMPERE RECEPTACLES INSTALLED IN THE LOCATIONS SPECIFIED BELOW SHALL HAVE GROUND FAULT CIRCUITS-INTERRUPTER PROTECTION FOR PERSONNEL.
    - a. BATHROOMS
    - b. GARAGES
    - c. OUTDOORS
    - d. CRAWLSPACES WHERE THE CRAWLSPACE IS AT OR BELOW GRADE LEVEL
    - e. UNFINISHED PORTIONS OR AREAS OF THE BASEMENT NOT INTENDED AS HABITABLE ROOMS
    - f. KITCHENS. WHERE THE RECEPTACLES ARE INSTALLED TO SERVE THE COUNTERTOP SERVICES
    - g. SINKS. WHERE THE RECEPTACLES ARE INSTALLED WITHIN 6 FEET FROM THE TOP INSIDE EDGE OF THE BOWL OF THE SINK.
    - h. BATHTUB OR SHOWER STALLS, WHERE THE RECEPTACLES ARE INSTALLED WITHIN 6 FEET OF THE OUTSIDE EDGE OF THE BATHTUB OR SHOWER STALLS
    - i. LAUNDRY AREAS
8. APPLIANCES RECEPTACLE OUTLETS INSTALLED IN A DWELLING UNIT FOR SPECIFICS OF APPLIANCES, SUCH AS LAUNDRY EQUIPMENT, SHALL BE INSTALLED WITHIN 6 FEET OF THE INTENDED LOCATION OF THE APPLIANCE (CEC ARTICLE 210-50 (C))
9. IN EVERY KITCHEN, FAMILY ROOM, DINING ROOM, LIVING ROOM, PARLOR, LIBRARY, DEN, SUNROOM, BEDROOM, RECREATION ROOM, OR SIMILAR ROOM OR AREA OF DWELLING UNITS, RECEPTACLE OUTLET SHALL BE INSTALLED SUCH THAT NO POINT MEASURED HORIZONTALLY ALONG THE FLOOR LINE IN ANY WALL SPACE IS MORE THAN 6 FEET FROM A RECEPTACLE OUTLETS. WALL SPACE 2 FEET OR MORE IN WIDTH AND WALL SPACE (INCLUDING SPACE MEASURED AROUND CORNERS) AND UNBROKEN ALONG THE FLOOR LINE BY DOORWAYS, AND SIMILAR OPENINGS, FIREPLACE AND FIXED CABINETS THAT DO NOT HAVE COUNTERTOPS OR SIMILAR WORK SURFACES. THE SPACE OCCUPIED BY FIXED PANELS IN WALLS EXCLUDING SLIDING PANELS. THE SPACE AFFORDED BY FIXED ROOM DIVIDERS, SUCH AS FREESTANDING BAR-TYPE COUNTERS OR RAILINGS (CEC ARTICLE 210.52(A))
10. IN THE KITCHENS, PANTRY, BREAKFAST ROOM, DINING ROOM, OR SIMILAR AREAS OF DWELLING UNIT, THE TWO OR MORE 20-AMPERE OR SMALL APPLIANCE BRANCH CIRCUITS REQUIRED BY ARTICLE 210.11(C)(I) SHALL SERVE ALL WALL AND FLOOR RECEPTACLE OUTLETS COVERED BY 210.52 (A), ALL COUNTERTOP OUTLETS COVERED BY 210.5(C) AND RECEPTACLE OUTLETS FOR REFRIGERATION EQUIPMENT (CEC ARTICLES 210.52 (B)(I))
11. AT LEAST ONE ADDITIONAL 20 AMPERE BRANCH CIRCUIT SHALL BE PROVIDED TO SUPPLY THE LAUNDRY RECEPTACLE OUTLET(S) REQUIRED BY ART 210–52 (F). THIS CIRCUIT SHALL HAVE NO OTHER OUTLETS. (CEC ART 210.11(C)(2))
12. IN KITCHENS, PANTRIES, BREAKFAST ROOM, DINING ROOMS AND SIMILAR AREAS OF DWELLING UNITS, RECEPTACLE OUTLETS FOR COUNTERTOPS AND WORK SURFACES SHALL BE INSTALLED IN ACCORDANCE WITH THE FOLLOWING:
    - A. RECEPTACLE OUTLET SHALL BE INSTALLED AT EACH WALL COUNTERTOP AND WORK SURFACE THAT IS 12 INCHES OR WIDER. RECEPTACLE OUTLET SHALL BE INSTALLED SO THAT NO POINT ALONG THE WALL LINE IS MORE THAN 24 INCHES MEASURED HORIZONTALLY FROM A RECEPTACLE OUTLET IN THAT SPACE. EXCEPTION: RECEPTACLE OUTLET SHOULD NOT BE REQUIRED ON THE WALL DIRECTLY BEHIND A RANGE, COUNTER-MOUNTED COOKING UNIT, OR SINK IN THE INSULATION. DESCRIBE IN FIGURE 210.52(C) (I)
    - B. AT LEAST ONE RECEPTACLE OUTLET SHALL BE INSTALLED AT EACH ISLAND COUNTERTOP SPACE WITH LONG DIMENSION OF 24 INCHES OR GREATER AND A SHORT DIMENSION OF 12 INCHES OR GREATER.
    - C. AT LEAST ONE RECEPTACLE OUTLET SHALL BE INSTALLED AT EACH PENINSULAR COUNTERTOP LONG DIMENSION SPACE WITH THE LONG DIMENSION OF 24 INCHES OR GRADER AND A SHORT DIMENSION OF 12 INCHES OR GREATER. A PENINSULA COUNTERTOP IS MEASURED FROM CONNECTED PERPENDICULAR WALL.
    - D. COUNTERTOP SPACES, SEPARATED BY RAIN STOPS, REFRIGERATORS, OR SING, SHALL BE CONSIDERED A SEPARATE COUNTERTOP SPACE IN APPLYING THE REQUIREMENTS OF ARTICLE, 210.52.
    - E. RECEPTACLE OUTLETS SHALL BE LOCATED ON OR ABOVE NOT MORE THAN 20 INCHES ABOVE THE COUNTERTOP OR WORK SURFACE. RECEPTACLE OUTLETS, ASSEMBLIES LISTED FOR USE IN COUNTERTOPS OR WORK SURFACES SHALL BE PERMITTED TO BE INSTALLED IN COUNTERTOPS OR WORK SURFACES. RECEPTACLE OUTLETS RENDERED NOT READILY ACCESSIBLE BY APPLIANCES FASTENED IN PLACE, APPLIANCES, GARAGES, SINKS, OR RANGE TOP AS COVERED IN ART 210.52 (C) (I). EXCEPTION, OR APPLIANCES OCCUPYING DEDICATED SPACE SHALL NOT BE CONSIDERED AS REQUIRED OUTLETS. (CEC ARTICLE 210-52 (C) (I) THROUGH (50 SEE ARTICLE FOR EXCEPTION(S).
13. AT LEAST ONE RECEPTACLE OUTLET SHALL BE INSTALLED IN BATHROOMS WITHIN 3-FEET OF THE OUTSIDE EDGE OF EACH BASIN. RECEPTACLE OUTLET SHALL BE LOCATED ON A WALL OR PARTITION THAT IS ADJACENT TO THE BASIN OR BASIN COUNTERTOP. LOCATED ON THE COUNTERTOP, OR INSTALLED ON THE SIDE OR FACE OF THE BASIN CABINET. IN NO CASE SHALL THE RECEPTACLE BE LOCATED MORE THAN 12 INCHES BELOW THE TOP OF THE BASIN OR BASIN COUNTERTOP. AT LEAST ONE 120-VOLT, 20-AMPERE BRANCH CIRCUIT SHALL BE PROVIDED TO SUPPLY THE BATHROOM(S) RECEPTACLE OUTLET(S). SUCH CIRCUIT SHALL HAVE NO OTHER OUTLETS. (CEC ARTICLES 210.52(D) & 210.11 (C) (3))
14. ARC-FAULT CIRCUIT-INTERRUPTER PROTECTION SHALL BE PROVIDED AS REQUIRED SHALL BE INSTALLED IN READILY ACCESSIBLE LOCATIONS. ALL 120-VOLT, SINGLE PHASE, 15- AND 20- AMPERE BRANCH CIRCUITS SUPPLYING OUTLETS OR DEVICES INSTALLED IN DWELLING UNIT KITCHENS, FAMILY, SUN-ROOMS, DINING ROOMS, LIVING ROOMS, PARLORS, LIBRARIES, DENS, BEDROOMS, RECREATION ROOMS, CLOSETS, HALLWAYS, LAUNDRY AREAS, OR SIMILAR ROOMS OR AREAS SHALL BE PROTECTED BY ANY OF THE MEANS DESCRIBED IN CEC ARTICLE 210.12 (A) (1) THROUGH (6). (CEC ARTICLE 210.12 (A)).
15. AT LEAST ONE ADDITIONAL 20-AMPERE BRANCH CIRCUIT SHALL BE INSTALLED TO SUPPLY RECEPTACLE OUTLETS IN ATTACHED GARAGES AND IN DETACHED GARAGES WITH ELECTRICAL POWER. THIS CIRCUIT SHALL HAVE NO OTHER OUTLETS. THIS CIRCUIT SHALL BE PERMITTED TO SUPPLY READILY ACCESSIBLE OUTDOOR RECEPTACLE OUTLETS (CEC ART 210.11 (C) (4))
16. EACH OUTLET INSTALLED FOR THE PURPOSE OF CHARGING ELECTRIC VEHICLES SHALL BE SUPPLIED BY AN INDIVIDUAL BRANCH CIRCUIT. EACH CIRCUIT SHALL HAVE NO OTHER OUTLETS (CEC ARTICLE 625.40).
17. ALL CONDUCTORS CLOSER THAN 1 ¼ INCH TO THE EDGE OF FRAMING MEMBERS SHALL BE PROTECTED WITH A STEEL PLATE AT LEAST 1/16 INCH THICKNESS. (CEC ARTICLE 330.17 & 300.4 (A).
18. ALL LIGHT FIXTURES INSTALLED IN WET OR DAMP LOCATIONS SHALL MEET THE REQUIREMENTS OF CEC ARTICLE 410.10 (A).
19. LIGHT FIXTURES WITHIN CLOTHES SHALL BE INSTALLED IN ACCORDANCE WITH CEC ARTICLE 410.16

MISCELLANEOUS

COMPLY WITH THE ENTIRE GENERAL REQUIREMENTS AS APPLICABLE FOR THE PROJECT, UNLESS MORE RESTRICTIVE REQUIREMENTS ARE SPECIFIED ON THE PLANS.

1. GARAGES SHALL HAVE NO OPENINGS INTO ROOMS FOR SLEEPING PURPOSES (CBC SEC 406.2.5)
2. WATER CLOSET SHALL NOT BE SET CLOSER THAN 15 INCHES FROM ITS CENTER TO A SIDE WALL OR OBSTRUCTION NOR CLOSER THAN 30 INCHES CENTER TO CENTER TO A SIMILAR FIXTURE. THE CLEAR SPACE IN FRONT OF A WATER CLOSET SHALL BE NOT LESS THAN 24 INCHES (CPC SECTION 402.5)
3. GUARDRAILS SHALL BE IN CONFORMANCE WITH SECTION 1015 OF THE CALIFORNIA BUILDING CODE .
4. GUARDS ON THE OPEN SIDE OF THE STAIRS SHALL NOT HAVE OPENINGS WHICH ALLOW PASSAGE OF SPHERE 4 ⅜ INCHES IN DIAMETER (CBC SECTION 1015.4 EXCEPTION 6).
5. THE TRIANGULAR OPENINGS AT THE OPEN SIDE OF THE STAIR, FORMED BY THE RISER, TREAD, AND BOTTOM RAIL OF A GUARD, SHALL NOT ALLOW PASSAGE OF A SPHERE 6 INCHES IN DIAMETER. (CBC SECTION 1015.4 EXCEPTION 2).
6. HANDRAILS SHALL BE IN CONFORMANCE WITH SECTION 1011.11 OF THE CALIFORNIA BUILDING CODE .
7. BUILDINGS SHALL BE PROVIDED WITH APPROVED ADDRESS IDENTIFICATION. THE ADDRESS IDENTIFICATION SHALL BE LEGIBLE AND PLACED IN A POSITION THAT IS VISIBLE FROM THE STREET OR ROAD FRONTING THE PROPERTY. ADDRESS IDENTIFICATION CHARACTERS SHALL CONTRAST WITH THEIR BACKGROUND, ADDRESS NUMBERS SHALL BE ARABIC NUMBERS OR ALPHABETICAL LETTERS. NUMBERS SHALL NOT BE SPELLED OUT. EACH CHARACTER SHALL BE NOT LESS THAN 4 INCHES (102 MM) IN HEIGHT WITH A STROKE WIDTH OF NOT LESS THAN 0.5 INCH (12.7 MM) OF A CONTRASTING TO THE BACKGROUND (CBC SECTION [F] 502.1) .
8. ROOF GUTTERS SHALL BE PROVIDED WITH THE MEANS TO PREVENT THE ACCUMULATION OF LEAVES AND DEBRIS IN THE GUTTER (CBC SECTION 705A.4)

TRIPLEX DWELLING UNIT

OPTION #1

PROJECT

TRIPLEX
DWELLING UNIT

PWP23-005

DEPARTMENT OF PUBLIC WORKS AND PLANNING

CAPITAL PROJECTS DIVISION

2220 Tulare St., Ste. 720, Fresno, CA. 93721
Phone: (559) 262-4212 Fax: (559) 262-4879

SEAL & SIGNATURE

LICENSED ARCHITECT
ROBINA R. WRIGHT
NO. C-32283
RENEWAL DATE
06/30/2025
STATE OF CALIFORNIA

UPDATE
MARCH 5, 2024

TITLE
GENERAL NOTES

SCALE 12" = 1'-0"

G-102

ISSUE DATE MARCH 28, 2023	JOB NUMBER 2023_12
DRAWN BY Author	CHECKED BY Checker

©

3/5/2024 12:09:28 PM
24" X 36"

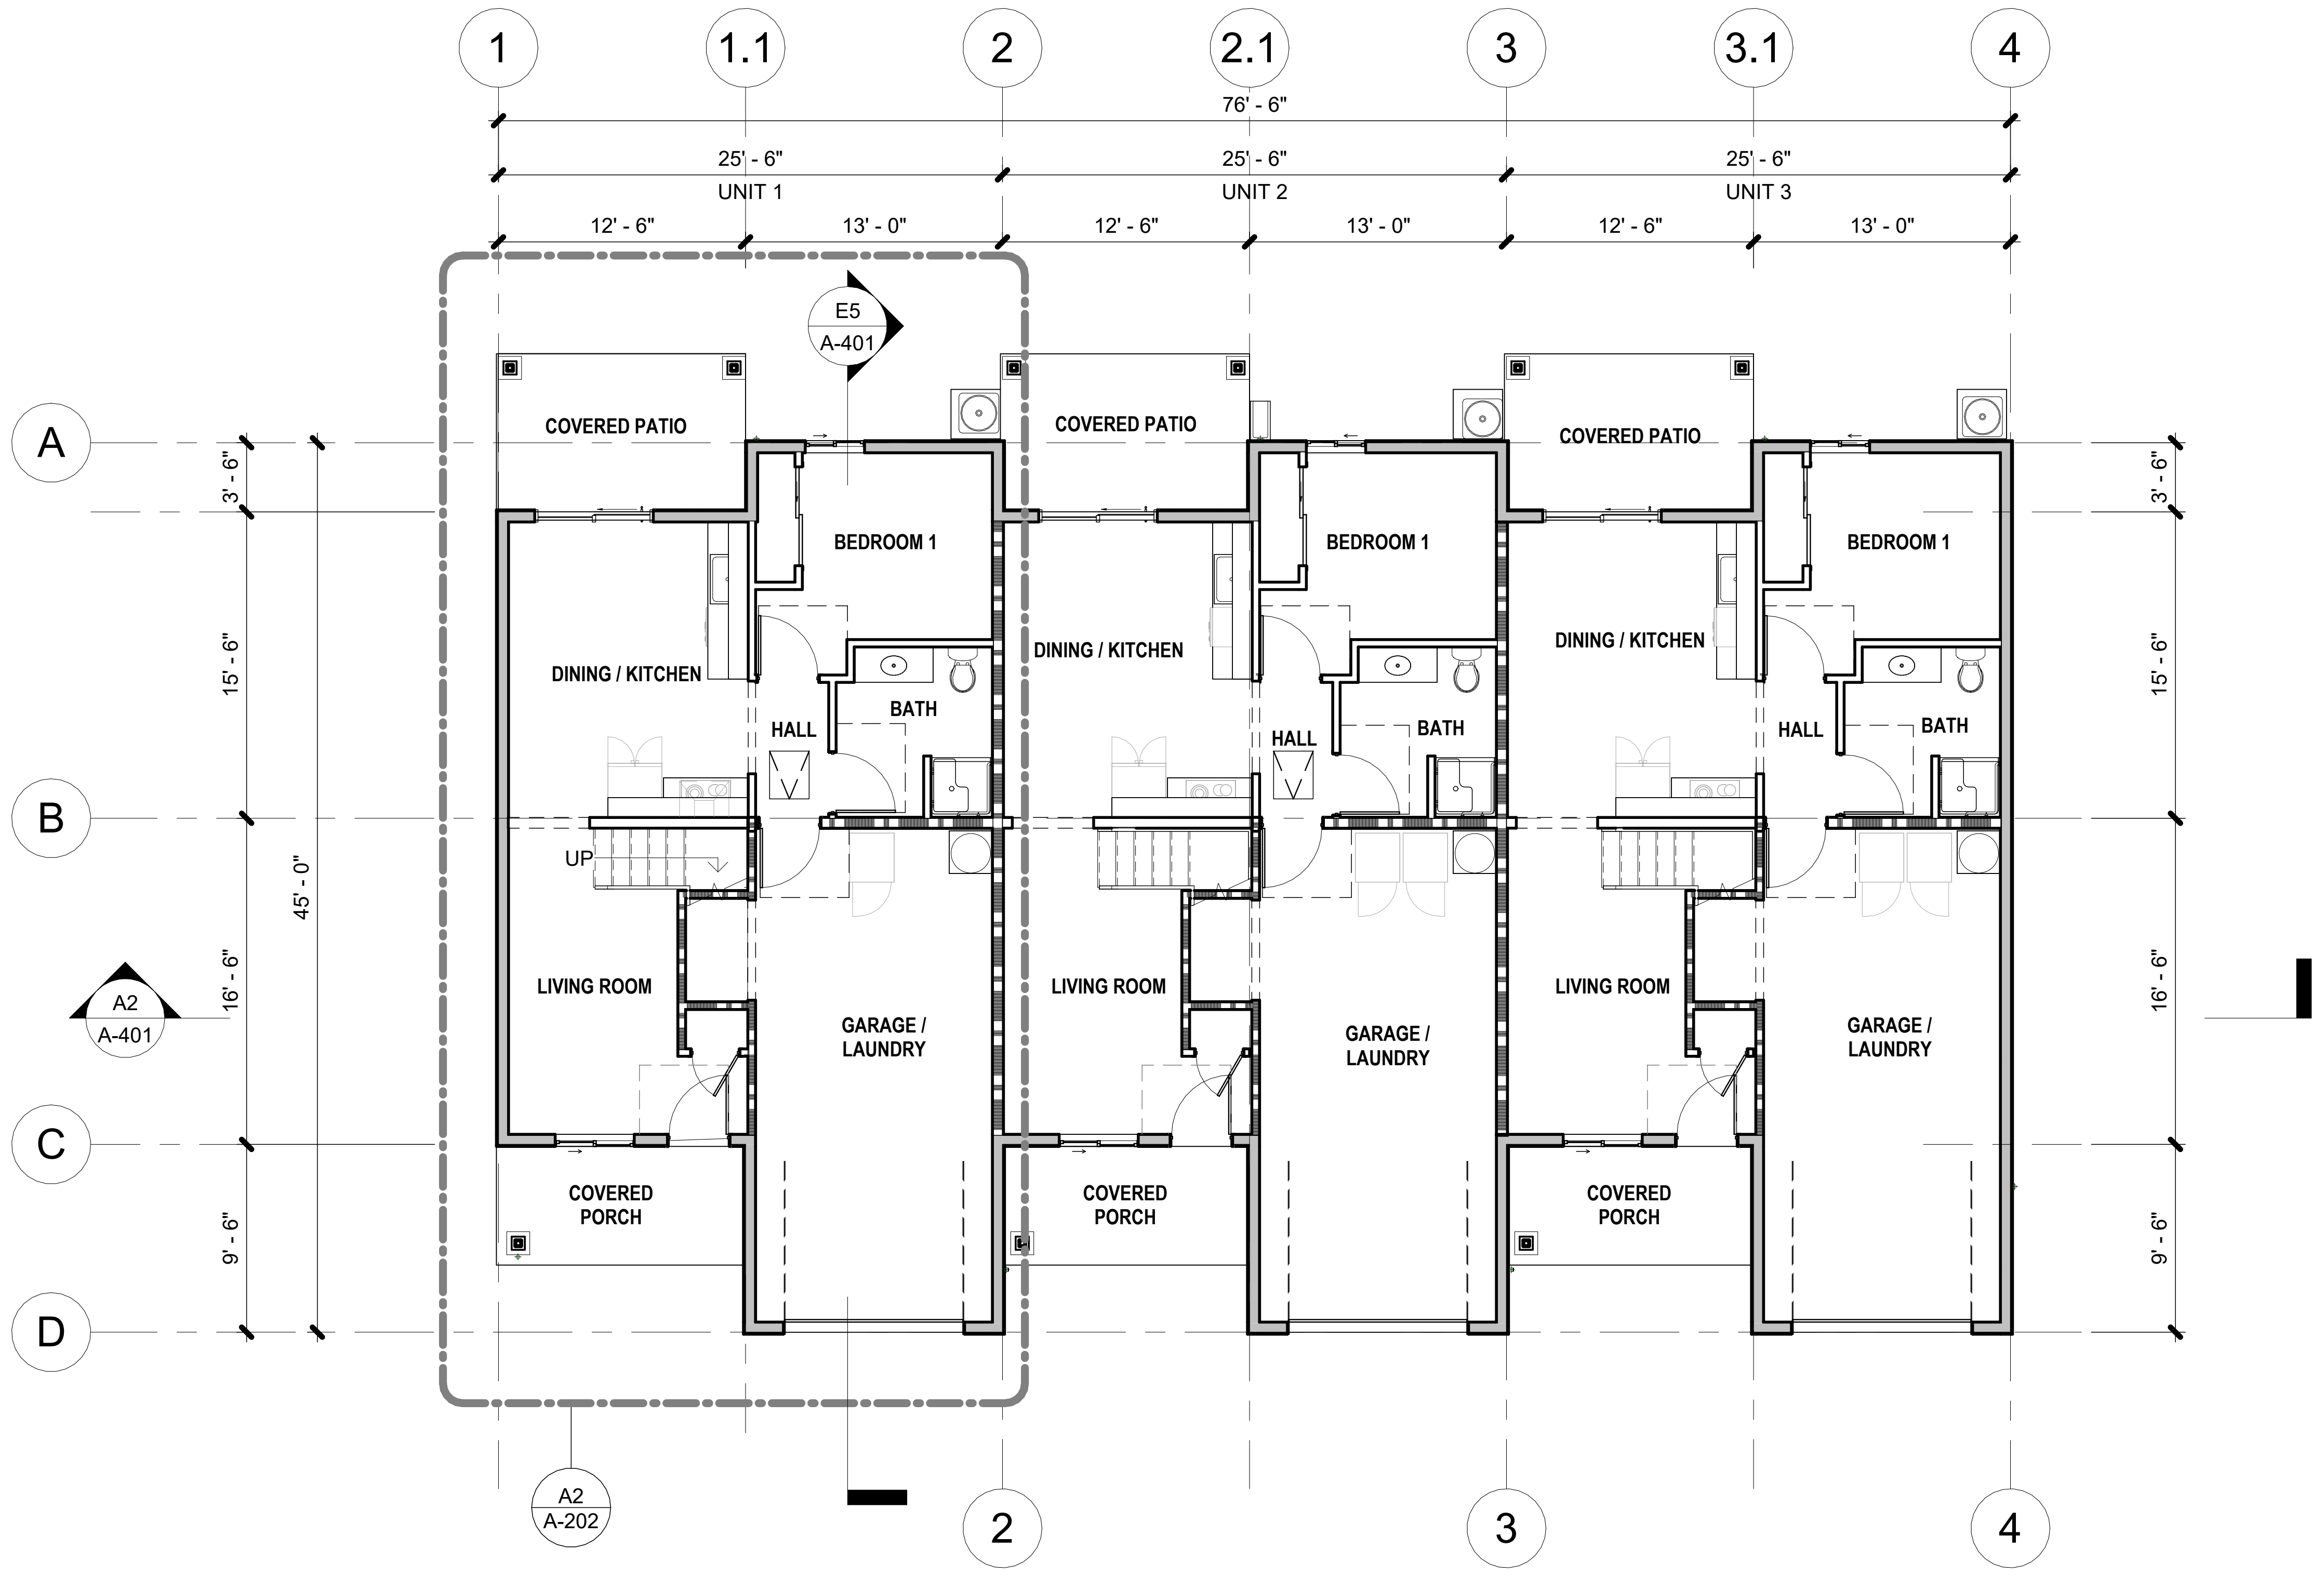

PROPOSED GROUND FLOOR PLAN E2

1/8" = 1'-0"

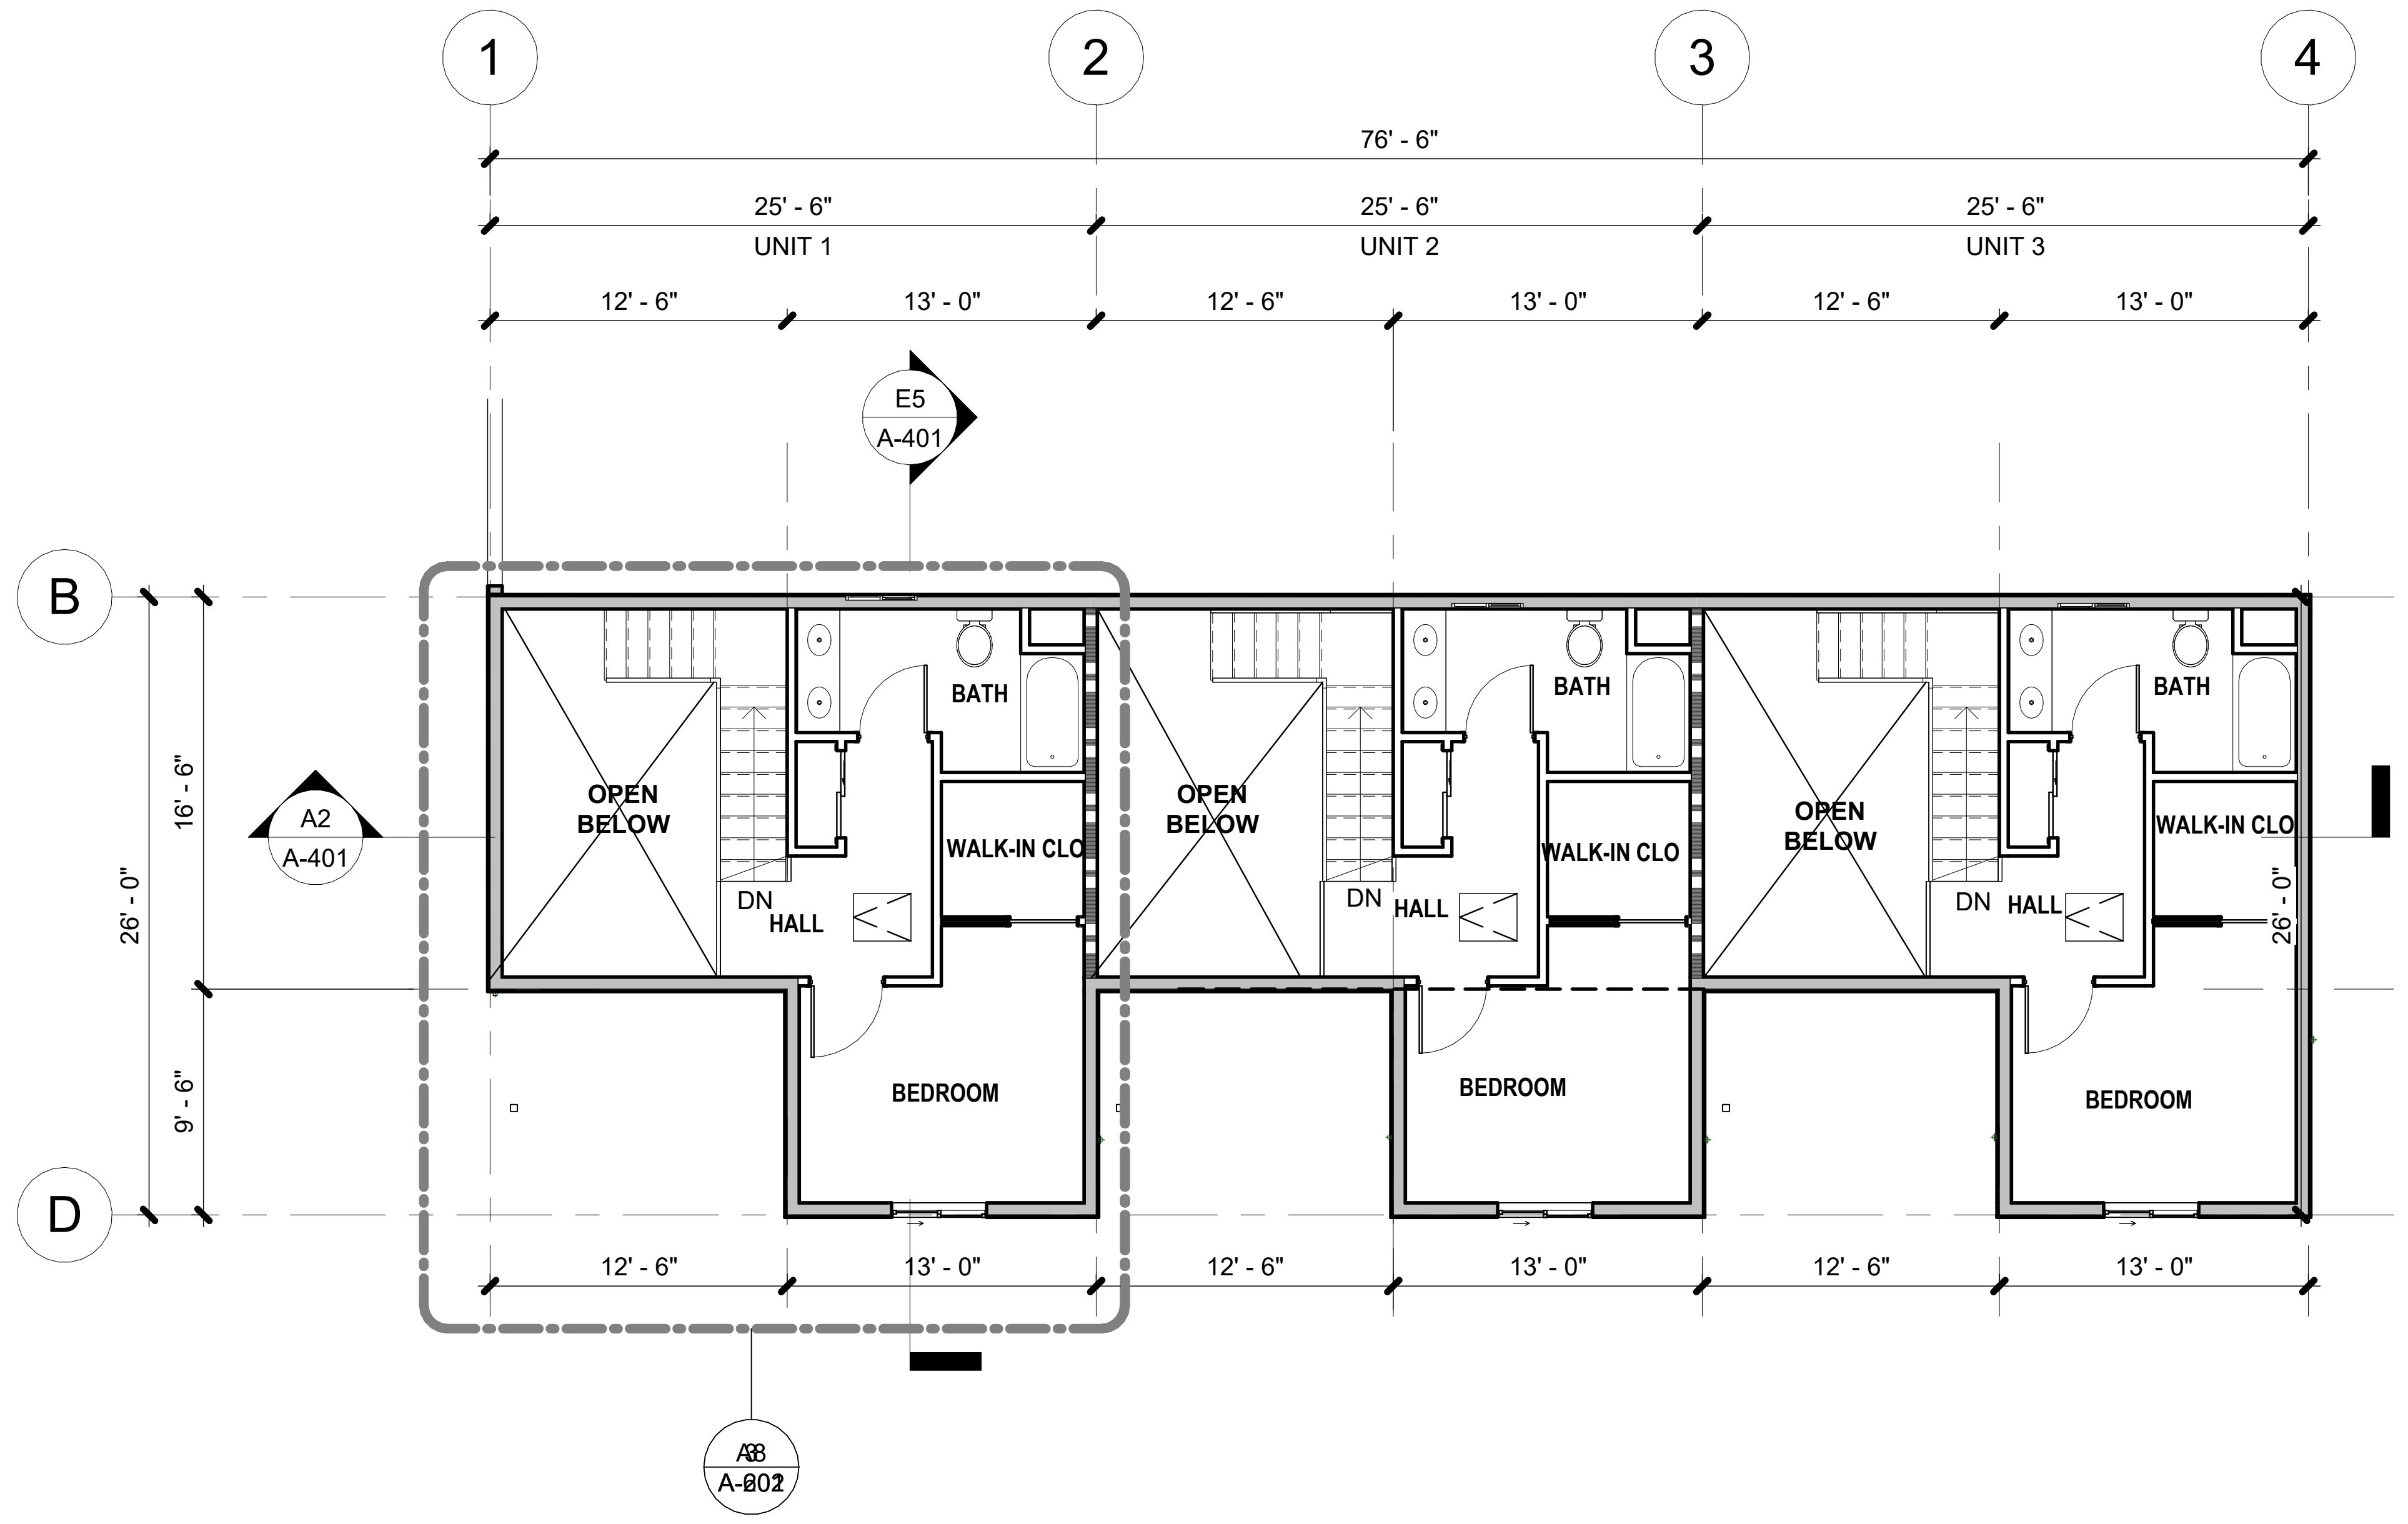

PROPOSED SECOND FLOOR PLAN A2

1/8" = 1'-0"

1ST FLOOR CONDITIONED SPACE (UNIT 1)	652 SF
2ND FLOOR CONDITIONED SPACE(UNIT 1)	339 SF
COVERED PATIO (UNIT 1)	98 SF
COVERED PORCH (UNIT 1)	74 SF
GARAGE (UNIT 1)	315 SF
Grand total	1478 SF

1ST FLOOR CONDITIONED SPACE (UNIT 2)	652 SF
2ND FLOOR CONDITIONED SPACE (UNIT 2)	339 SF
COVERED PATIO (UNIT 2)	98 SF
COVERED PORCH (UNIT 2)	74 SF
GARAGE (UNIT 2)	315 SF
Grand total	1478 SF

1ST FLOOR CONDITIONED SPACE (UNIT 3)	652 SF
2ND FLOOR CONDITIONED SPACE (UNIT 3)	339 SF
COVERED PATIO (UNIT 3)	98 SF
COVERED PORCH (UNIT 3)	74 SF
GARAGE (UNIT 3)	315 SF
Grand total	1478 SF

FLOOR PLAN GENERAL NOTES:

1. VERIFY ALL DIMENSIONS, GRADES, AND OTHER CONDITIONS AT JOB SITE BEFORE COMMENCING WORK. DIMENSIONS SHOWN ON THESE PLANS ARE FROM FACE OF FINISH, UNLESS OTHERWISE NOTED.
2. WEATHER-STRIP ALL EXTERIOR DOORS AND WINDOWS CERTIFIED ACCORDING TO SECTION 2-555 OF STANDARD FOR DOORS AND WINDOWS.
3. ALL OPENINGS AROUND DUCTING. GAS VENTS, PIPES, CHIMNEYS AT THE CEILING SHALL BE FIRE BLOCKED PER CBC.
4. ALL WINDOWS AND DOORS SHALL MEET THE AIR INFILTRATION STANDARDS OF THE **2022** CALIFORNIA BUILDING AND ENERGY CODES SHALL BE CERTIFIED AND LABELED.
5. INTERIOR WALL COVERING TO BE 1/2" THK. GYP. BRD., UNLESS OTHERWISE NOTED. (FLAME SPREAD CLASS 111)
6. ALL WINDOW GLAZING ARE TO BE DUAL-GLAZED AND PROVIDE SOLAR SCREENS.
7. GLASS DOORS AND WINDOWS IMMEDIATELY TO OR LESS THAN 18" FROM FLOOR OR IN DOOR SHALL BE TEMPERED.
8. THE FOLLOWING SHALL BE CAULKED OR OTHERWISE SEALED TO LIMIT AIR INFILTRATION:
   A. EXTERIOR JOINTS AROUND WINDOWS AND DOOR FRAMES, BETWEEN WALLS SOLE PLATES AND FLOORS AND BETWEEN WALL PANELS.
   B. OPENING FOR PLUMBING, ELECTRICITY, AND GAS LINES IN WALLS, CEILINGS AND FLOORS.
   C. OPENINGS IN THE ATTIC FLOOR (SUCH AS WHERE CEILING PANELS MEET INTERIOR AND EXTERIOR WALLS AND MASONRY FIREPLACES.)
9. PROVIDE 2x SOLID BLOCKING BEHIND ALL TOILET FIXTURES, CABINETS, WATER HEATER, CEILING LIGHT FIXTURES (FUTURE FAN LOCATION) AND WHEREVER DIRECTED BY THE OWNER, INSPECTOR OR ARCHITECT.
10. DUCT CONSTRUCTED, INSTALLED AND INSULATED PER CURRENT CODE AND TITLE 24.
11. MECHANICAL VENTILATION SYSTEMS MUST SUPPLY **5 CHANGES PER HOUR IN BATHROOMS AND LAUNDRY ROOMS: 2 AIR CHANGES PER HOUR** IN OTHER HABITABLE ROOMS.
12. PROVIDE 1-1/2" DUCT INSULATION (TYPICAL).
13. VERIFY ALL APPLIANCE SPECIFICATIONS, SIZES AND OWNER'S REQUIREMENT FOR BUILT-IN ASSEMBLY PRIOR TO PRODUCTION OF CASEWORKS. ADJUST DIMENSIONS OF BUILT IN CASEWORK WITH APPLIANCE DIMENSION.
14. CONSTRUCT PATIO SLABS WITH 4" THK. CONCRETE X 12" DP. SHOVEL (1 #4 BAR) FOOTING AT PERIMETER. SLABS ARE TO BE BROOM FINISH. PROVIDE 6x6x10 /10 WWM IN MIDDLE OF SLABS.
15. THE ENERGY CERTIFICATION OF COMPLIANCE MUST BE SUBMITTED AFTER INSTALLATION OF THE REQUIRED EQUIPMENT AND/OR MATERIAL AND PRIOR TO REQUEST OF FINAL INSPECTION.
16. PROVIDE 115V OUTLET (W.P., GFI) WITHIN 25 FEET OF ROOF MOUNTED EQUIPMENT.
17. AFTER INSTALLING INSULATION, THE INSTALLER SHALL POST IN A CONSPICUOUS LOCATION IN THE BUILDING A CERTIFICATE SIGNED BY THE INSTALLER AND THE BUILDER STATING THAT THE INSTALLATION CONFORM WITH THE REQUIREMENTS FOR TITLE 24 PART 2, CHAPTER 2-53 AND THAT THE MATERIALS INSTALLED CONFORM WITH THE REQUIREMENTS OF TITLE 20, CHAPTER 2 SUB-CHAPTER 4, ARTICLE 3. THE CERTIFICATE SHALL STATE THE MANUFACTURER'S NAME AND MATERIAL IDENTIFICATION, THE INSTALLED "R" VALUE, AND (IN APPLICATIONS OF LOOSE FILL INSULATION) THE MINIMUM INSTALLED WEIGHT PER SQUARE FOOT CONSISTENT WITH THE MANUFACTURER'S LABEL DENSITY FOR THE DESIRED "R" VALUE TO BE INSTALLED IN CEILING AND IN WALLS.
18. WALL AND CEILING FINISHES SHALL HAVE A FLAME SPREAD INDEX OF NOT GREATER THAN 200. **CBC 803.1.2**
19. WALL AND CEILING FINISHES SHALL HAVE A SMOKED-DEVELOPED INDEX OF NOT GREATER THAN 450. **CBC 803.1.2**
20. PROVIDE DOOR CHIME / BELL ON EACH UNIT AT 48" MAX. AFF. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION

DOOR LANDING NOTES

1. LANDING SHALL HAVE A WIDTH NOT LESS THAN THE WIDTH OF THE DOOR AND 36" MIN. IN THE DIRECTION OF TRAVEL. (CBC 1008.1.5)
2. PER CBC 1008.1.6 BELOW:

"1008.1.6 THRESHOLDS. THRESHOLDS AT DOORWAYS SHALL NOT EXCEED 0.75 INCH IN HEIGHT FOR SLIDING DOORS SERVING DWELLING UNITS OR 0.5 INCH FOR OTHER DOORS.
RAISED THRESHOLDS AND FLOOR LEVEL CHANGES GREATER THAN 0.25 INCH AT DOORWAYS SHALL BE BEVELED WITH A SLOPE NOT GREATER THAN ONE UNIT VERTICAL IN TWO UNITS HORIZONTAL (50-PERCENT SLOPE).
EXCEPTION: THE THRESHOLD HEIGHT SHALL BE LIMITED TO 7.75 INCHES WHERE THE OCCUPANCY IS GROUP R-2 OR R-3; THE DOOR IS AN EXTERIOR DOOR THAT IS NOT A COMPONENT OF THE REQUIRED MEANS OF EGRESS; THE DOOR, OTHER THAN AN EXTERIOR STORM OR SCREEN DOOR DOES NOT SWING OVER THE LANDING OR STEP; AND THE DOORWAY IS NOT ON AN ACCESSIBLE ROUTE AS REQUIRED BY CHAPTER LLA OR 11B AND IS NOT PART OF AN ADAPTABLE OR ACCESSIBLE DWELLING UNIT."

LEGEND

▨	2x6 EXTERIOR WALL ASSEMBLY. REFER TO A1 / A-803 AND A-803 FOR ADDITIONAL INFORMATION.
▭	TYP. INTERIOR PARTITION WALL. 1/2" GYP. BOARD EACH SIDE OF 2X4 STUDS @ 16" O.C. TYPICAL INTERIOR WALL PARTITION, U.N.O. REFER TO A5 / A-803 FOR ADDITIONAL INFORMATION. * FOR BATHROOM WALLS: FIBER-CEMENT, FIBER-MAT REINFORCED CEMENT, GLASS MAT GYPSUM BACKERS OR FIBER-REINFORCED GYPSUM BACKERS IN COMPLIANCE WITH ASTM C 1288, C1325, C 1178 OR C 1278, RESPECTIVELY, AND INSTALLED IN ACCORDANCE WITH MANUFACTURERS' RECOMMENDATIONS SHALL BE USED AS BACKERS FOR WALL TILE IN TUB AND SHOWER AREAS AND WALL PANELS IN SHOWER AREAS.
▥	2x6 INTERIOR STUD WALL (60 MINUTES FIRE RESISTANCE RATING) REFER TO G1 / A-803 FOR ADDITIONAL INFORMATION.
▥	2x4 INTERIOR STUD WALL (60 MINUTES FIRE RESISTANCE RATING) REFER TO G5 / A-803 FOR ADDITIONAL INFORMATION.
◜	DOOR REFER TO A-601 FOR ADDITIONAL INFORMATION.
▭	WINDOW REFER TO A-601 FOR ADDITIONAL INFORMATION,

TRIPLEX DWELLING UNIT

OPTION #1

PROJECT

TRIPLEX
DWELLING UNIT

PWP23-005

DEPARTMENT OF PUBLIC WORKS AND PLANNING

CAPITAL PROJECTS DIVISION

2220 Tulare St., Ste. 720, Fresno, CA. 93721
Phone: (559) 262-4212 Fax: (559) 262-4879

SEAL & SIGNATURE

ROBINA R. WRIGHT
NO. C-32283
RENEWAL DATE
06/30/2025

UPDATE
MARCH 5, 2024

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY AND COPYRIGHT OF THE ARCHITECT AND SHALL NOT BE USED ON ANY OTHER PROJECT OR LOCATIONS EXCEPT AS DESCRIBED ON THE DRAWINGS WITHOUT WRITTEN AGREEMENT WITH THE ARCHITECT.

TITLE
PROPOSED FLOOR PLAN

SCALE As indicated

A-201

ISSUE DATE MARCH 28, 2023	JOB NUMBER 2023_12
DRAWN BY Author	CHECKED BY Checker

©

3/5/2024 12:09:30 PM
24" X 36"

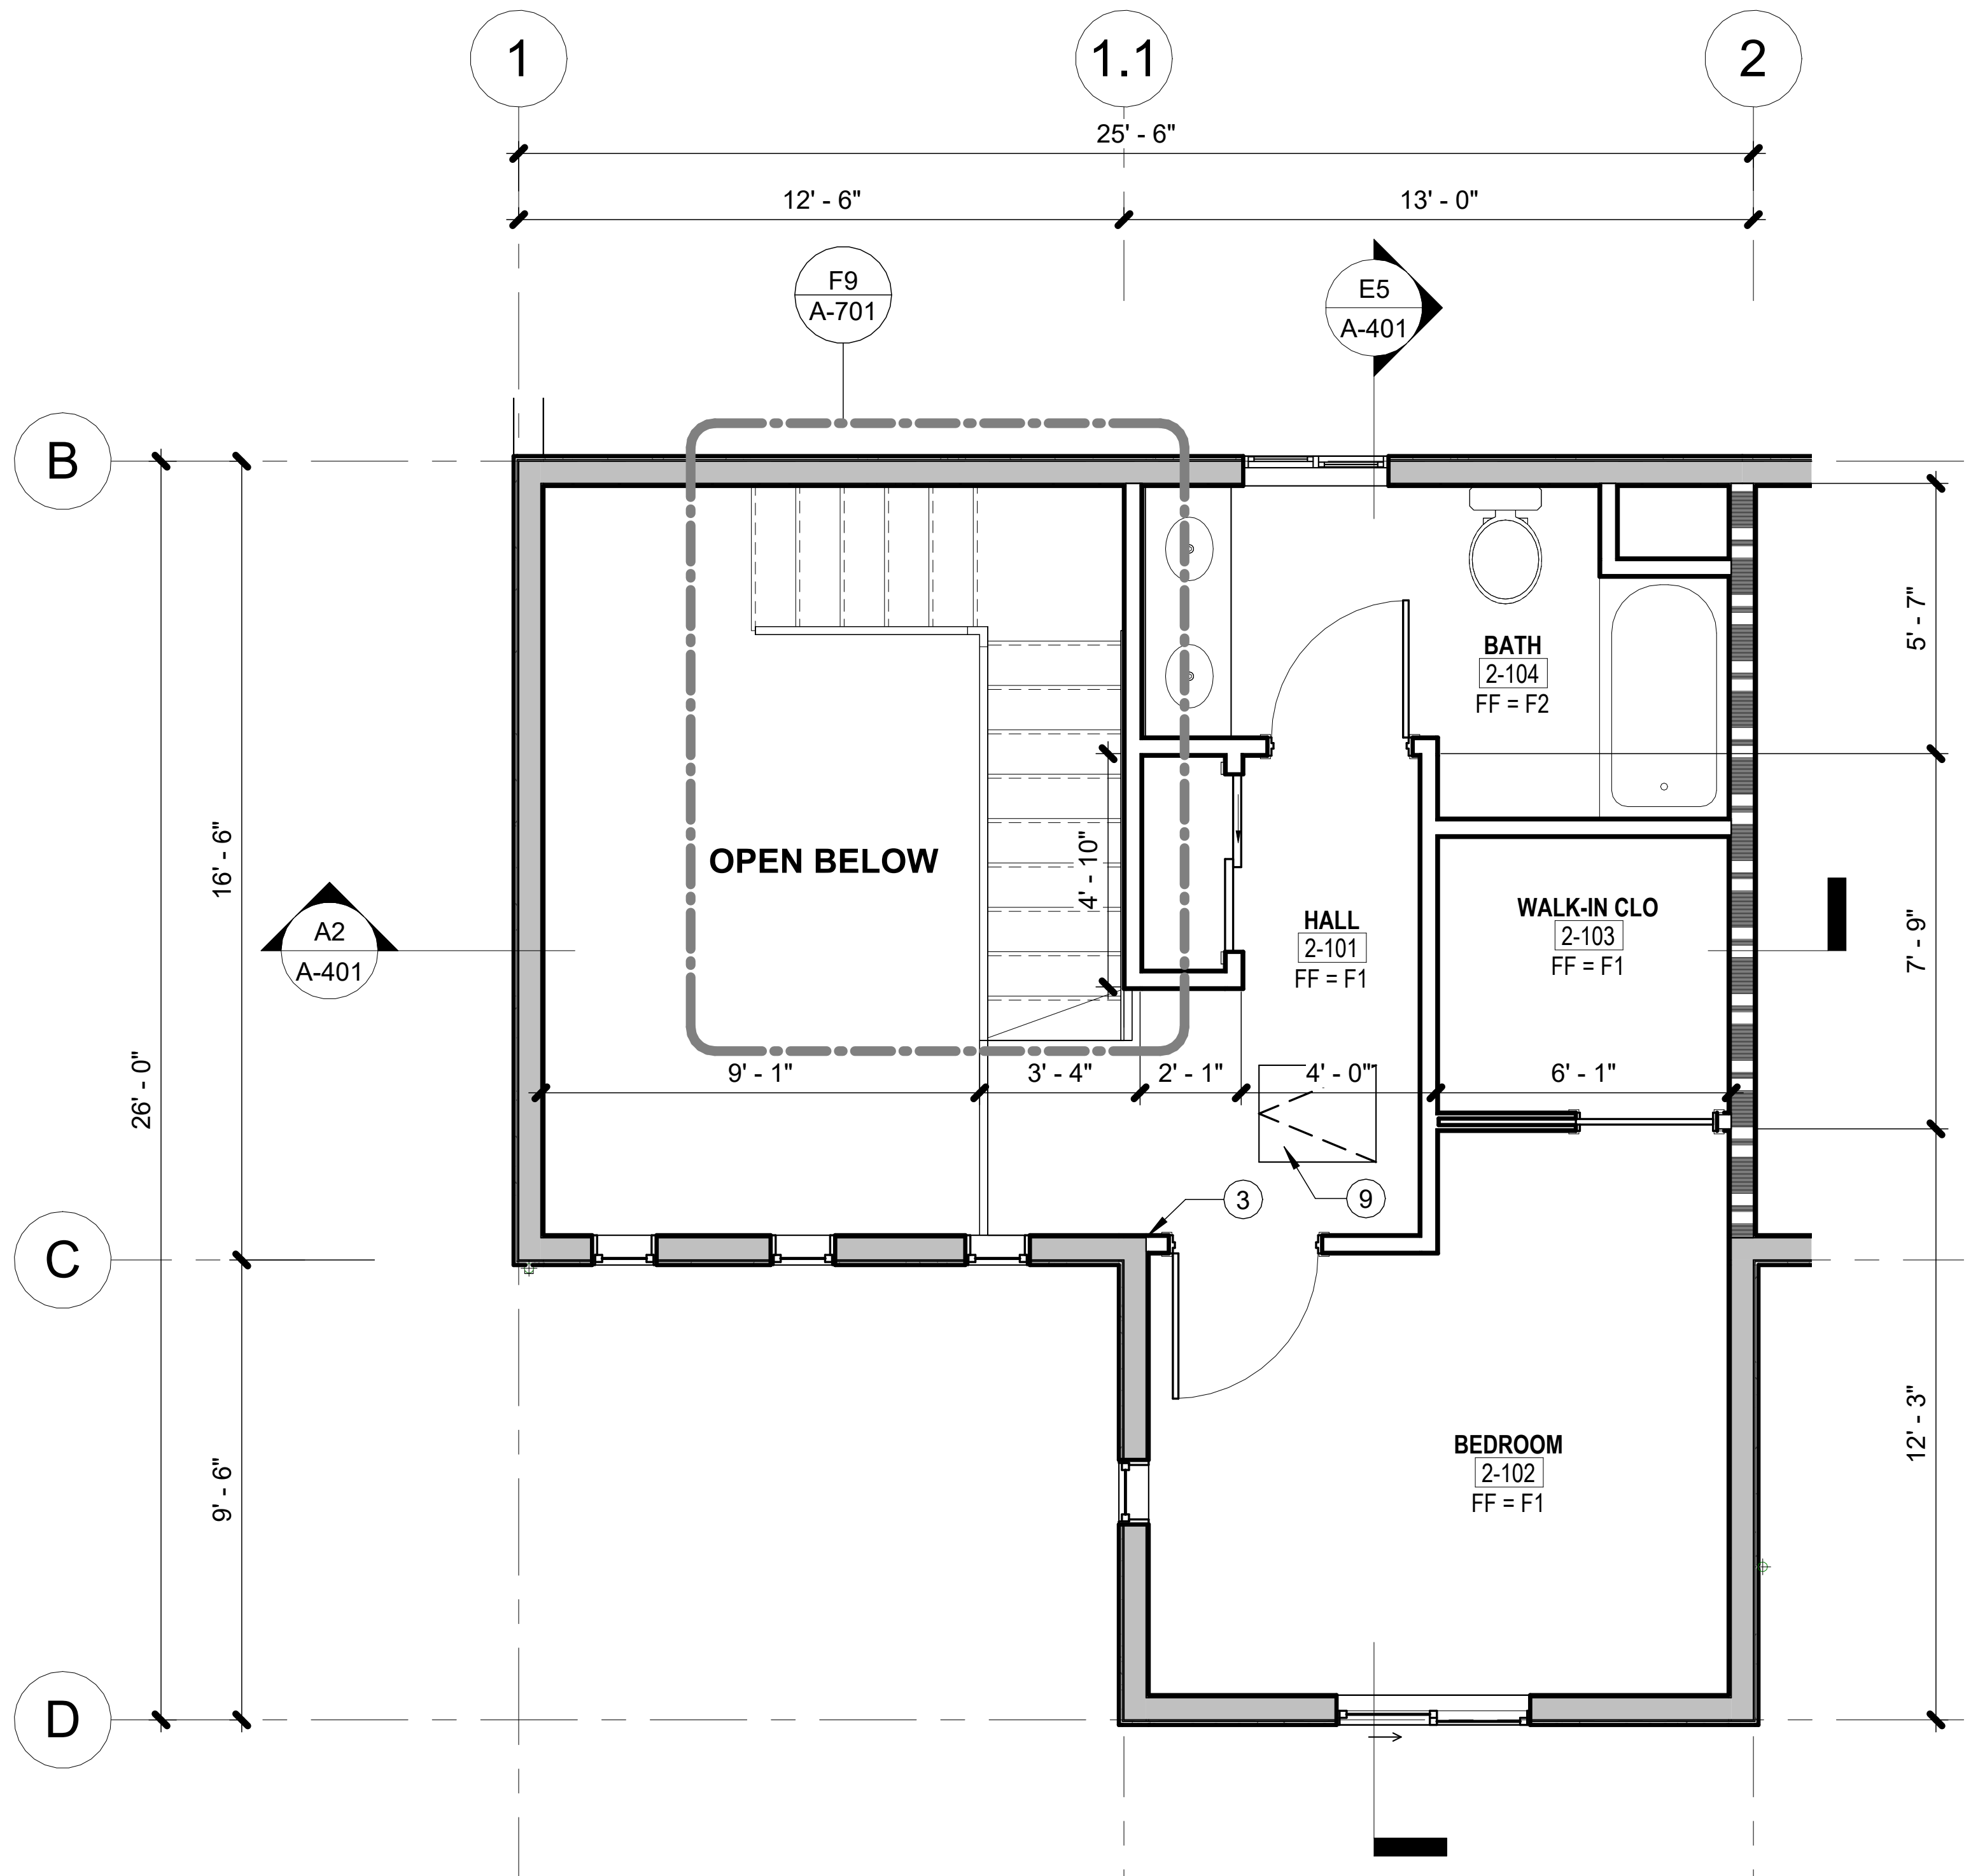

TYPICAL SECOND FLOOR PLAN - ENLARGED VIEW A8

1/4" = 1'-0"

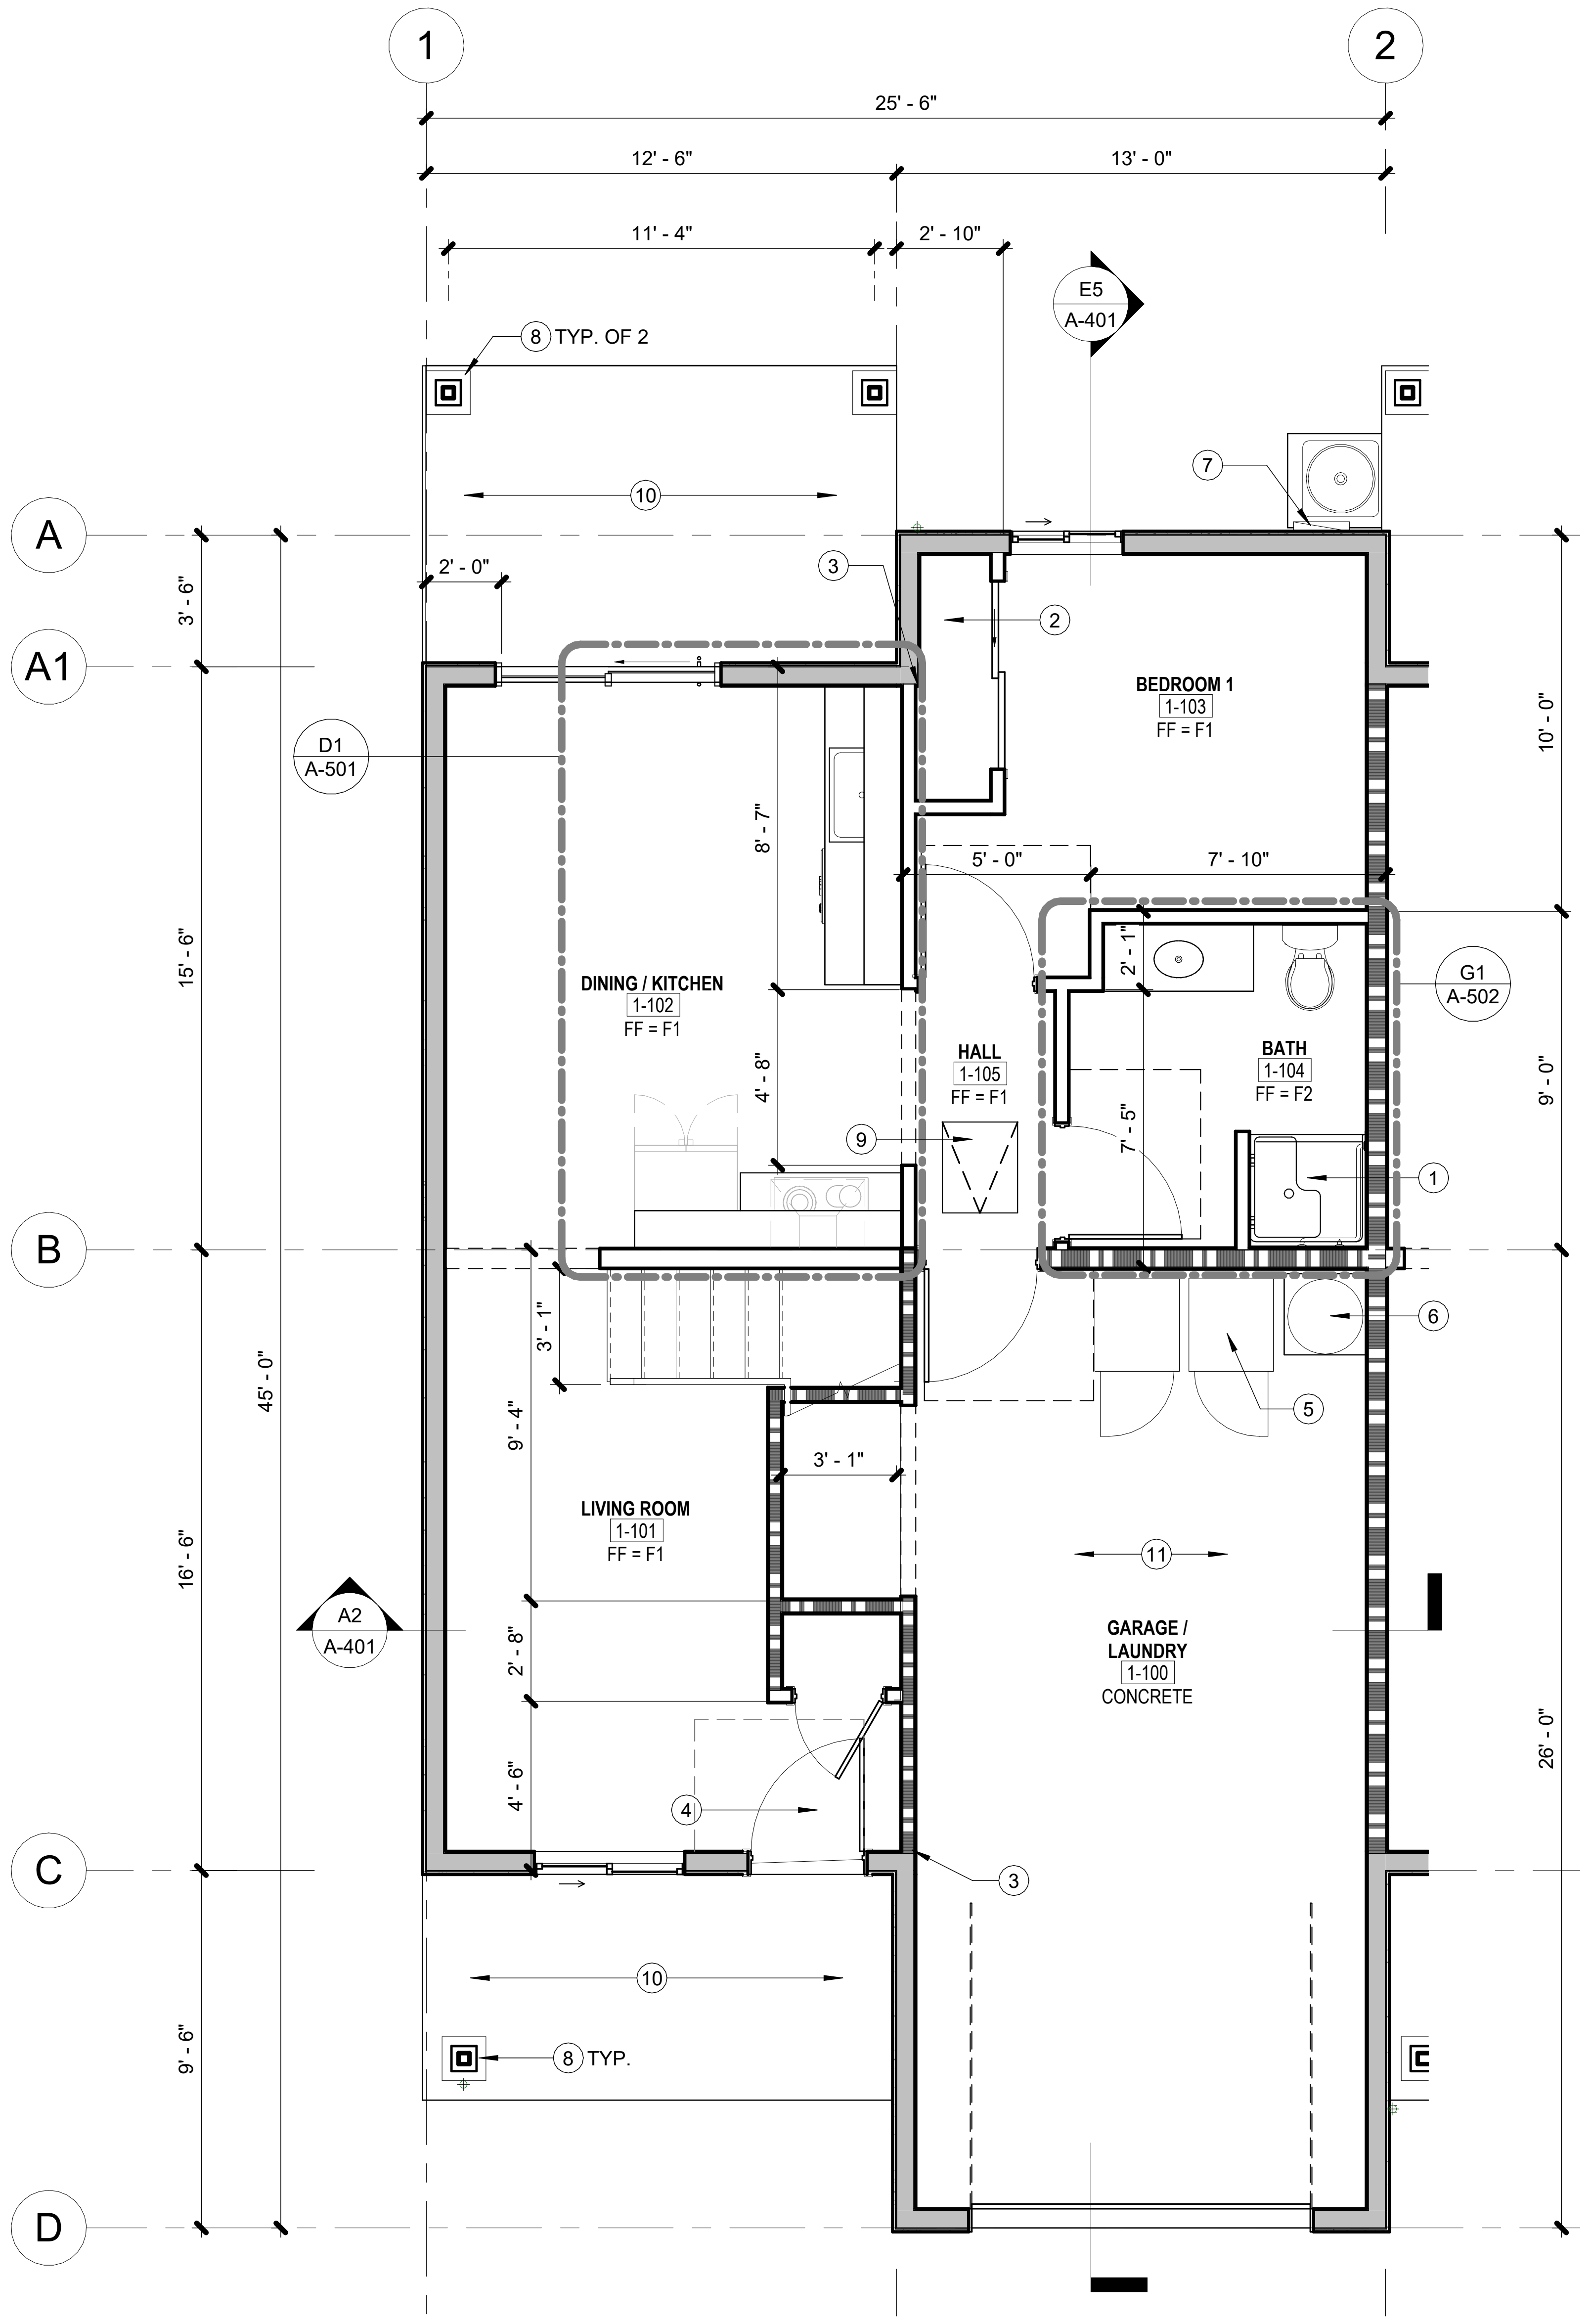

1ST FLOOR CONDITIONED SPACE (UNIT 1)	652 SF
2ND FLOOR CONDITIONED SPACE(UNIT 1)	339 SF
COVERED PATIO (UNIT 1)	98 SF
COVERED PORCH (UNIT 1)	74 SF
GARAGE (UNIT 1)	315 SF
Grand total	1478 SF

TYPICAL GROUND FLOOR PLAN - ENLARGED VIEW A2

1/4" = 1'-0"

FLOOR PLAN KEYNOTES

1. ADAPTABLE ROLL-IN SHOWER. MAINTAIN A 2% MAXIMUM SLOPE IN ALL DIRECTIONS. TYPICAL ON ALL SHOWER AND BATHROOMS. REFER TO C6 / A-502 FOR ADDITIONAL INFORMATION.
2. BUILT-IN CLOSET/DRAWERS WITH CLOTHES ROD. PROVIDE 50% OF STORAGE AT 48" HIGH MAX. FROM FINISH FLOOR.
3. ALIGN WITH EDGE OF WALL FOR A SMOOTH AND FLUSHED FINISHED.
4. PROVIDE PEEP HOLE OR VISION PANEL AT 1 PEEPHOLE AT 43" MAX. (OPTIONS PEEPHOLE @ MAX. 60" O.C. AFF). PROVIDE STEEL PLATE AT THE DEAD BOLT STRIKER. SOLID SHIM 6" ABOVE & BELOW WITH 2/8 BY 2" SCREWS.
5. WASHING MACHINES AND CLOTHES DRYERS. DRYER SHALL HAVE 4" VENT DUCT TO EXTERIOR WITH MAXIMUM RUN OF 14' INCLUDING 2-90° ELBOWS. TWO FEET SHALL BE DEDUCTED FOR EACH 90 DEGREE ELBOW IN EXCESS OF TWO. REFER TO E1 / A-805 FOR ADDITIONAL DETAIL.
   NOTE: WASHING MACHINES AND CLOTHES DRYERS SHALL BE FRONT LOADING. THE BOTTOM OF THE OPENING TO THE LAUNDRY COMPARTMENT SHALL BE LOCATED 15 INCHES MINIMUM AND 36 INCHES MAXIMUM ABOVE THE FINISH FLOOR. 2022 CBC 1127A.10.4
6. 50 GAL. HEAT PUMP WATER HEATER. (MINIMUM OF 3.2 UEF PER TITLE 24). INSTALL PER MANUFACTURER'S INSTALLATION INSTRUCTIONS.
7. NEW SERVICE PANEL. COORDINATE WITH POWER AND GAS COMPANY PROVIDER PRIOR TO COMMENCING WORK. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
8. POST WITH OPTIONAL 2X POST WRAP. REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
9. MIN. 24" X 36" ATTIC ACCESS PANEL. "ATTIC ACCESS DOORS SHALL HAVE PERMANENTLY ATTACHED INSULATION USING ADHESIVE OR MECHANICAL FASTENERS. THE ATTIC ACCESS SHALL BE GASKETED TO PREVENT AIR LEAKAGE; AND WHEN LOOSE-FILL INSULATION IS INSTALLED, THE MINIMUM INSTALLED WEIGHT PER SQUARE FOOT SHALL CONFORM WITH THE INSULATION MANUFACTURER'S INSTALLED DESIGN WEIGHT PER SQUARE FOOT AT THE MANUFACTURER'S LABELED R-VALUE." 2022 CEC 160.1
10. CONCRETE PATIO/LANDING. SLOPED AT 2% MAXIMUM AWAY FROM THE BUILDING. REFER TO A1 / A-801 FOR ADDITIONAL INFORMATION.
11. PROVIDE MINIMUM OF 5/8" TYPE "X" GYP BOARD OR EQUIVALENT SEPARATION BETWEEN HABITABLE ROOMS ABOVE THE GARAGE. DUCTS PENETRATING THE WALLS OR CEILING SEPARATING THE DWELLING UNIT FROM THE GARAGE SHALL BE CONSTRUCTED OF SHEET MIN. 26 GA. THICKNESS OR OTHER APPROVED MATERIALS AND SHALL NOT HAVE OPENINGS INTO THE GARAGE. REFER TO A-806 THROUGH A-809 FOR ADDITIONAL INFORMATION.

LEGEND

▬	2x6 EXTERIOR WALL ASSEMBLY. REFER TO A1 / A-803 AND A-803 FOR ADDITIONAL INFORMATION.
▭	TYP. INTERIOR PARTITION WALL. 1/2" GYP. BOARD EACH SIDE OF 2X4 STUDS @ 16" O.C. TYPICAL INTERIOR WALL PARTITION, U.N.O. REFER TO A5 / A-803 FOR ADDITIONAL INFORMATION. * FOR BATHROOM WALLS: FIBER-CEMENT, FIBER-MAT REINFORCED CEMENT, GLASS MAT GYPSUM BACKERS OR FIBER-REINFORCED GYPSUM BACKERS IN COMPLIANCE WITH ASTM C 1288, C1325, C 1178 OR C 1278, RESPECTIVELY, AND INSTALLED IN ACCORDANCE WITH MANUFACTURERS' RECOMMENDATIONS SHALL BE USED AS BACKERS FOR WALL TILE IN TUB AND SHOWER AREAS AND WALL PANELS IN SHOWER AREAS.
▨	2x6 INTERIOR STUD WALL (60 MINUTES FIRE RESISTANCE RATING) REFER TO G1 / A-803 FOR ADDITIONAL INFORMATION.
▨	2x4 INTERIOR STUD WALL (60 MINUTES FIRE RESISTANCE RATING) REFER TO G5 / A-803 FOR ADDITIONAL INFORMATION.
	DOOR REFER TO A-601 FOR ADDITIONAL INFORMATION.
▭	WINDOW REFER TO A-601 FOR ADDITIONAL INFORMATION,

FINISH LEGEND

FLOOR FINISHES (FF)	
F1	LUXURY VINYL TILES
F2	CERAMIC TILES OPTION: FLOOR FINISH WITH NON-ABSORBENT SURFACE FROM FINISH FLOOR TO MINIMUM OF 6' A.F.F.

TRIPLEX DWELLING UNIT

OPTION #1

PROJECT

TRIPLEX
DWELLING UNIT

PWP23-005

DEPARTMENT OF PUBLIC WORKS AND PLANNING

CAPITAL PROJECTS DIVISION

2220 Tulare St., Ste. 720, Fresno, CA. 93721
Phone: (559) 262-4212 Fax: (559) 262-4879

SEAL & SIGNATURE

ROBINA R. WRIGHT
NO. C-32283
RENEWAL DATE
06/30/2025

UPDATE

MARCH 5, 2024

TITLE **TYPICAL FLOOR PLAN - ENLARGED VIEWS**

SCALE 1/4" = 1'-0"

A-202

ISSUE DATE MARCH 28, 2023	JOB NUMBER 2023_12
DRAWN BY Author	CHECKED BY Checker

©

3/5/2024 12:09:32 PM
24" X 36"

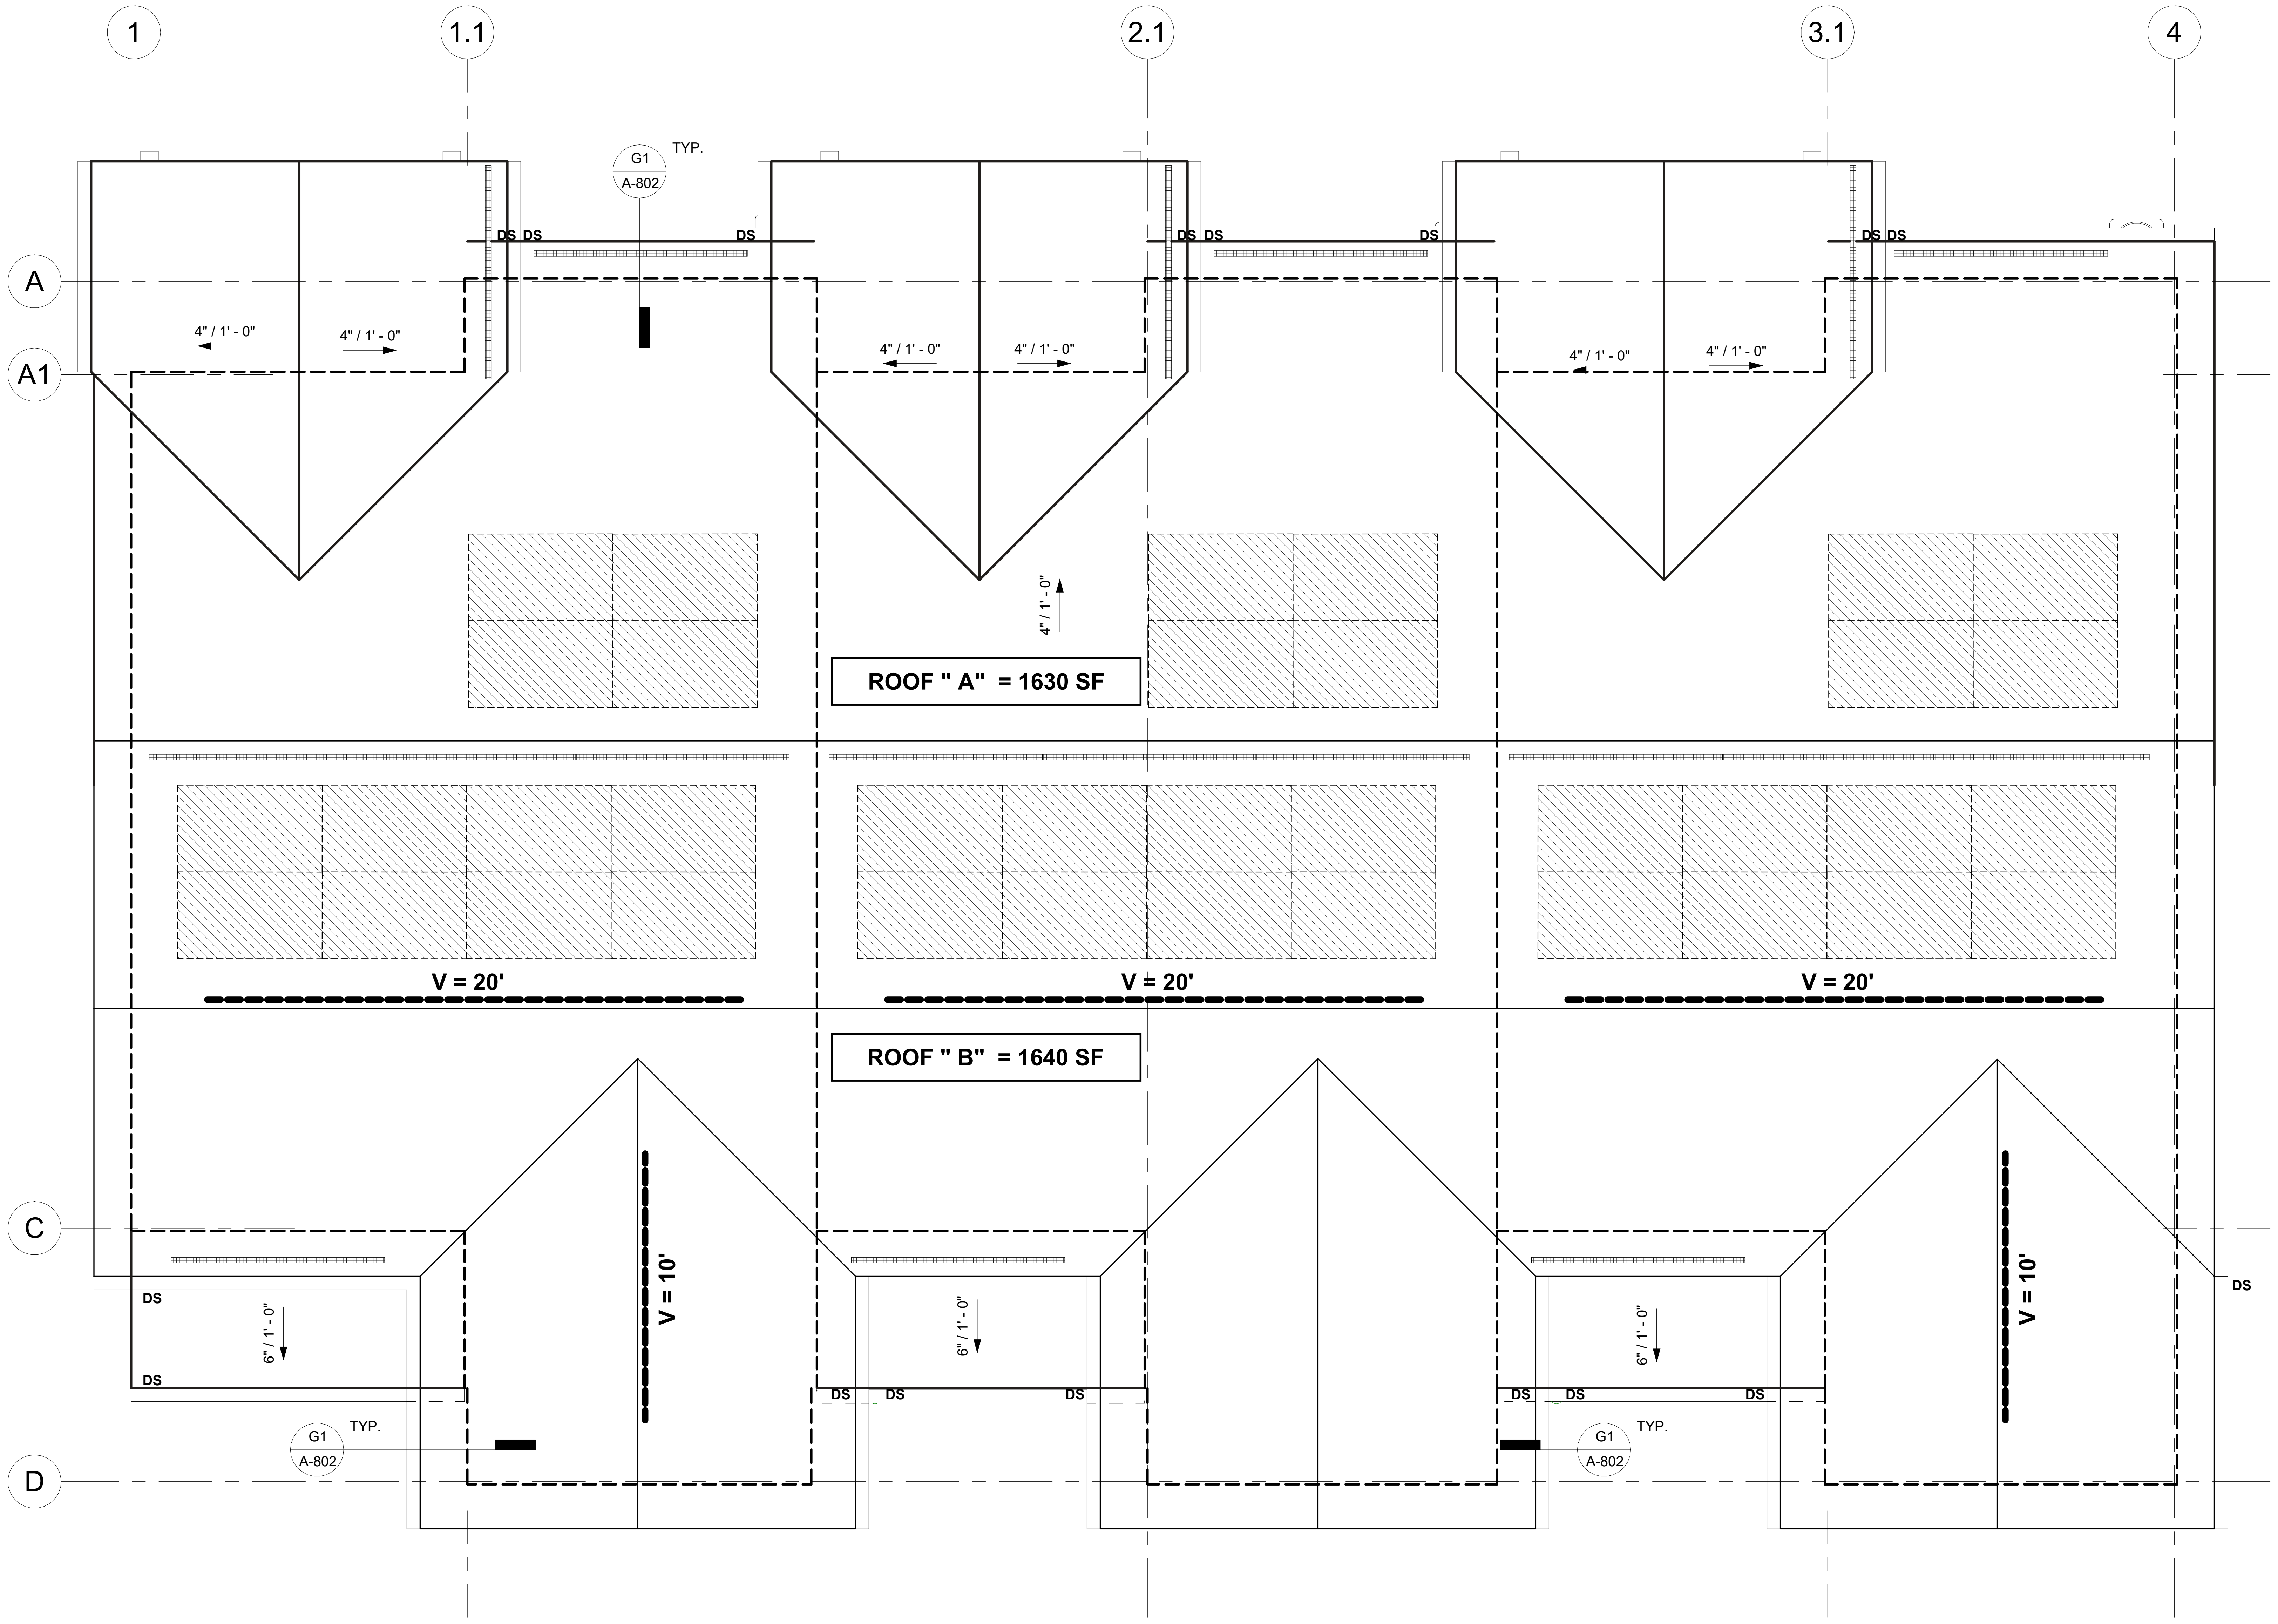

PROPOSED ROOF PLAN

A4

1/4" = 1'-0"

ROOF PLAN KEYNOTES

1. ASPHALT COMPOSITION ROOFING WITH MINIMUM CLASS "C" RATING OVER 30 # FELT OVER PLYWOOD SHEATHING. OPTIONAL ROOF MATERIAL: GA 24 STANDING SEAM METAL ROOF.
2. LOCATE LOWER DOWNSPOUT AT CORNER WALL . TERMINATE 2" ABOVE CONCRETE BACKSPLASH. REFER TO ELEVATIONS FOR ADDITIONAL INFORMATION.

SOLAR ZONE GENERAL NOTES

1. AZIMUTH RANGE. ALL SECTIONS OF THE SOLAR ZONE LOCATED ON STEEP-SLOPED ROOFS SHALL HAVE AN AZIMUTH RANGE BETWEEN 90 DEGREES AND 300 DEGREES OF TRUE NORTH.
2. SHADING.
   - A. NO OBSTRUCTIONS, INCLUDING BUT NOT LIMITED TO, VENTS, CHIMNEYS, ARCHITECTURAL FEATURES AND ROOF MOUNTED EQUIPMENT, SHALL BE LOCATED IN THE SOLAR ZONE.
   - B. ANY OBSTRUCTION, LOCATED ON THE ROOF OR ANY OTHER PART OF THE BUILDING THAT PROJECTS ABOVE A SOLAR ZONE SHALL BE LOCATED AT LEAST TWICE THE DISTANCE, MEASURED IN THE HORIZONTAL PLANE, OF THE HEIGHT DIFFERENCE BETWEEN THE HIGHEST POINT OF THE OBSTRUCTION AND THE HORIZONTAL PROJECTION OF THE NEAREST POINT OF THE SOLAR ZONE, MEASURED IN THE VERTICAL PLANE.

EXCEPTION TO SECTION 110.10(B)3: ANY ROOF OBSTRUCTION, LOCATED ON THE ROOF OR ANY OTHER PART OF THE BUILDING, THAT IS ORIENTED NORTH OF ALL POINTS ON THE SOLAR ZONE.
3.STRUCTURAL DESIGN LOADS ON CONSTRUCTION DOCUMENTS. FOR AREAS OF THE ROOF DESIGNATED AS SOLAR ZONE, THE STRUCTURAL DESIGN LOADS FOR ROOF DEAD LOAD AND ROOF LIVE LOAD SHALL BE CLEARLY INDICATED ON THE CONSTRUCTION DOCUMENTS.

NOTE: SECTION 110.10(B)4 DOES NOT REQUIRE THE INCLUSION OF ANY COLLATERAL LOADS FOR FUTURE SOLAR ENERGY SYSTEMS.

4. INTERCONNECTION PATHWAYS.
   - A. THE CONSTRUCTION DOCUMENTS SHALL INDICATE A LOCATION RESERVED FOR INVERTERS AND METERING EQUIPMENT AND A PATHWAY RESERVED FOR ROUTING OF CONDUIT FROM THE SOLAR ZONE TO THE POINT OF INTERCONNECTION WITH THE ELECTRICAL SERVICE.
   - B. FOR SINGLE-FAMILY RESIDENCES AND CENTRAL WATER-HEATING SYSTEMS, THE CONSTRUCTION DOCUMENTS SHALL INDICATE A PATHWAY FOR ROUTING OF PLUMBING FROM THE SOLAR ZONE TO THE WATER-HEATING SYSTEM.
5. DOCUMENTATION. A COPY OF THE CONSTRUCTION DOCUMENTS OR A COMPARABLE DOCUMENT INDICATING THE INFORMATION FROM SECTIONS 110.10(B) THROUGH 110.10(C) SHALL BE PROVIDED TO THE OCCUPANT.
6. MAIN ELECTRICAL SERVICE PANEL.
   - A. THE MAIN ELECTRICAL SERVICE PANEL SHALL HAVE A MINIMUM BUSBAR RATING OF 200 AMPS.
   - B. THE MAIN ELECTRICAL SERVICE PANEL SHALL HAVE A RESERVED SPACE TO ALLOW FOR THE INSTALLATION OF A DOUBLE POLE CIRCUIT BREAKER FOR A FUTURE SOLAR ELECTRIC INSTALLATION. THE RESERVED SPACE SHALL BE PERMANENTLY MARKED AS "FOR FUTURE SOLAR ELECTRIC".

7. SOLAR ZONE.
   - 1. MINIMUM SOLAR ZONE AREA. THE SOLAR ZONE SHALL HAVE A MINIMUM TOTAL AREA AS DESCRIBED BELOW. THE SOLAR ZONE SHALL COMPLY WITH ACCESS, PATHWAY, SMOKE VENTILATION, AND SPACING REQUIREMENTS AS SPECIFIED IN TITLE 24, PART 9 OR OTHER PARTS OF TITLE 24 OR IN ANY REQUIREMENTS ADOPTED BY A LOCAL JURISDICTION. THE SOLAR ZONE TOTAL AREA SHALL BE COMPRISED OF AREAS THAT HAVE NO DIMENSION LESS THAN FIVE FEET AND ARE NO LESS THAN 80 SQUARE FEET EACH FOR BUILDINGS WITH ROOF AREAS LESS THAN OR EQUAL TO 10,000 SQUARE FEET OR NO LESS THAN 160 SQUARE FEET EACH FOR BUILDINGS WITH ROOF AREAS GREATER THAN 10,000 SQUARE FEET.
   - A. MULTIFAMILY BUILDINGS, HOTEL/MOTEL OCCUPANCIES AND NONRESIDENTIAL BUILDINGS. THE SOLAR ZONE SHALL BE LOCATED ON THE ROOF OR OVERHANG OF THE BUILDING OR ON THE ROOF OR OVERHANG OF ANOTHER STRUCTURE LOCATED WITHIN 250 FEET OF THE BUILDING OR ON COVERED PARKING INSTALLED WITH THE BUILDING PROJECT, AND SHALL HAVE A TOTAL AREA NO LESS THAN 15 PERCENT OF THE TOTAL ROOF AREA OF THE BUILDING EXCLUDING ANY SKYLIGHT AREA. THE SOLAR ZONE REQUIREMENT IS APPLICABLE TO THE ENTIRE BUILDING, INCLUDING MIXED OCCUPANCY.

ATTIC VENTILATION CALCULATION

ROOF "A"
1630 SF / 150 = 10.86 SQ. FT. = 1564.80 SQ. IN.
1564.80 SQ. IN. @ 50% UPPER AND LOWER NFVA = 782.40 SQ. IN.

RIDGE VENT:
USE OMNI RIDGE PRO VENT (PRO4-N)
MANUFACTURER'S DATA:NFVA = 18 SQ. IN. / L.F.

782.40 SQ.IN.-L.F. / 18 SQ. IN.= 43.47 L.F. (REQUIRED MINIMUM)

PROVIDE = 44 L.F. = 792 NFVA

SOFFIT VENT:
LOMANCO MODEL 105 CONTINUOUS VINYL SOFFIT VENT
MANUFACTURER'S SIZE = 22.75" X 8'
N.F.V. = 72 SQ. IN. / 8' FT. 9 SQ.IN./L.F.

REQUIRED: 782.40 IN^2 - LF / 9 IN^2 = 86.93 L.F.

PROVIDE: (11) 2.75" X 8' = 88 L.F. @ 9 SQ.IN./L.F. = 792 NFVA

ROOF "B"
1640 SF / 150 = 10.93 SQ. FT. = 1574.4 SQ. IN.
1574.4 SQ. IN. @ 50% UPPER AND LOWER NFVA = 787.2 SQ. IN.

RIDGE VENT:
USE OMNI RIDGE PRO VENT (PRO4-N)
MANUFACTURER'S DATA: NFVA = 18 SQ. IN. / L.F.

787.2 SQ.IN.-L.F. / 18 SQ. IN. = 43.73 L.F. (REQUIRED)

PROVIDE = 44 L.F. = 792 NFVA

SOFFIT VENT:
LOMANCO MODEL 105 CONTINUOUS VINYL SOFFIT VENT
MANUFACTURER'S SIZE = 22.75" X 8'
N.F.V. = 72 SQ. IN. / 8' FT. 9 SQ.IN./L.F.

REQUIRED: 787.2 IN^2 - LF / 9 IN^2 = 87.46 L.F.

PROVIDE: (11) 2.75" X 8' = 88 L.F. @ 9 SQ.IN./L.F.= 792 NFVA

NOTES:

1. AIR SPACE REQUIRED FOR VENTILATION IS ≥ 1" BETWEEN THE INSULATION AND THE ROOF SHEATHING.
2. PROVIDE VAPOR RETARDER WITH A TRANSMISSION RATE OF ≤ 1 PERM.
3. PROVIDE 1/4" MESH AT ALL VENTS, INCLUDING CONTINUOUS VENTS.
4. **R8** INSULATED DUCTS

ROOF PLAN LEGEND

V = — — — — —	ROOF VENT. SEE ATTIC VENTILATION CALCULATION FOR ADDITIONAL INFORMATION
▦	INLET BALANCING VENT. SEE ATTIC VENTILATION CALCULATION FOR ADDITIONAL INFORMATION.
DS	2" x 3" POWDER COATED - 24GA. DOWNSPOUT w/ STRAP @ 60" O.C. MAX.
▨	PROPOSED SOLAR ZONE AREA 2022 CEC SECTION 110.10.(b)B. POTENTIAL SOLAR ZONE AREA. = 15 percent of the total roof area of the building excluding any skylight area ROOF AREA = 3270 *SQ.FT. ROOF AREA @ 15% = 490.50* PROVIDE MINIMUM 500 SQ.FT. SOLAR ZONE AREA FOR FUTURE SOLAR INSTALLATION

TRIPLEX DWELLING UNIT

OPTION #1

PROJECT

TRIPLEX
DWELLING UNIT

PWP23-005

DEPARTMENT OF PUBLIC WORKS AND PLANNING

CAPITAL PROJECTS DIVISION

2220 Tulare St., Ste. 720, Fresno, CA. 93721
Phone: (559) 262-4212 Fax: (559) 262-4879

SEAL & SIGNATURE

ROBINA R. WRIGHT
NO. C-32283
RENEWAL DATE
06/30/2025

UPDATE
MARCH 5, 2024

TITLE
PROPOSED ROOF PLAN

SCALE 1/4" = 1'-0"

A-203

ISSUE DATE	JOB NUMBER
MARCH 28, 2023	2023_12
DRAWN BY	CHECKED BY
Author	Checker

©

3/5/2024 12:09:33 PM
24" X 36"

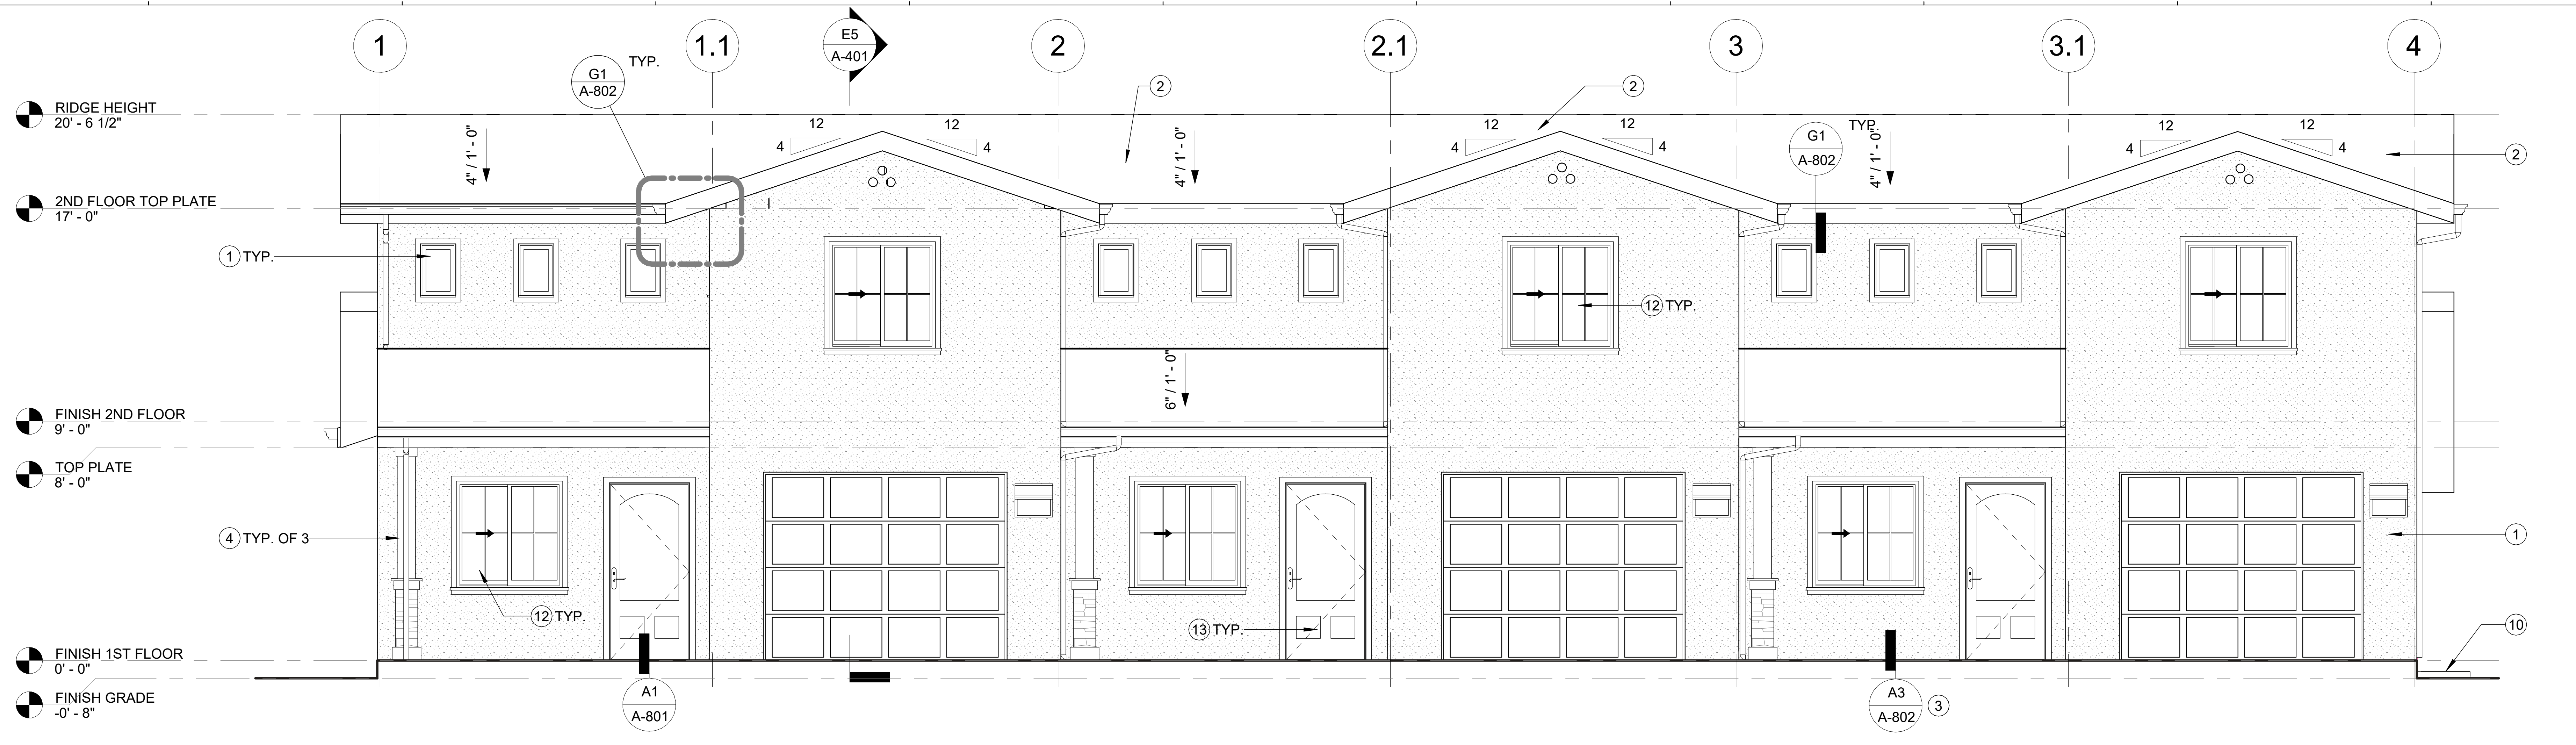

FRONT ELEVATION G2

1/4" = 1'-0"

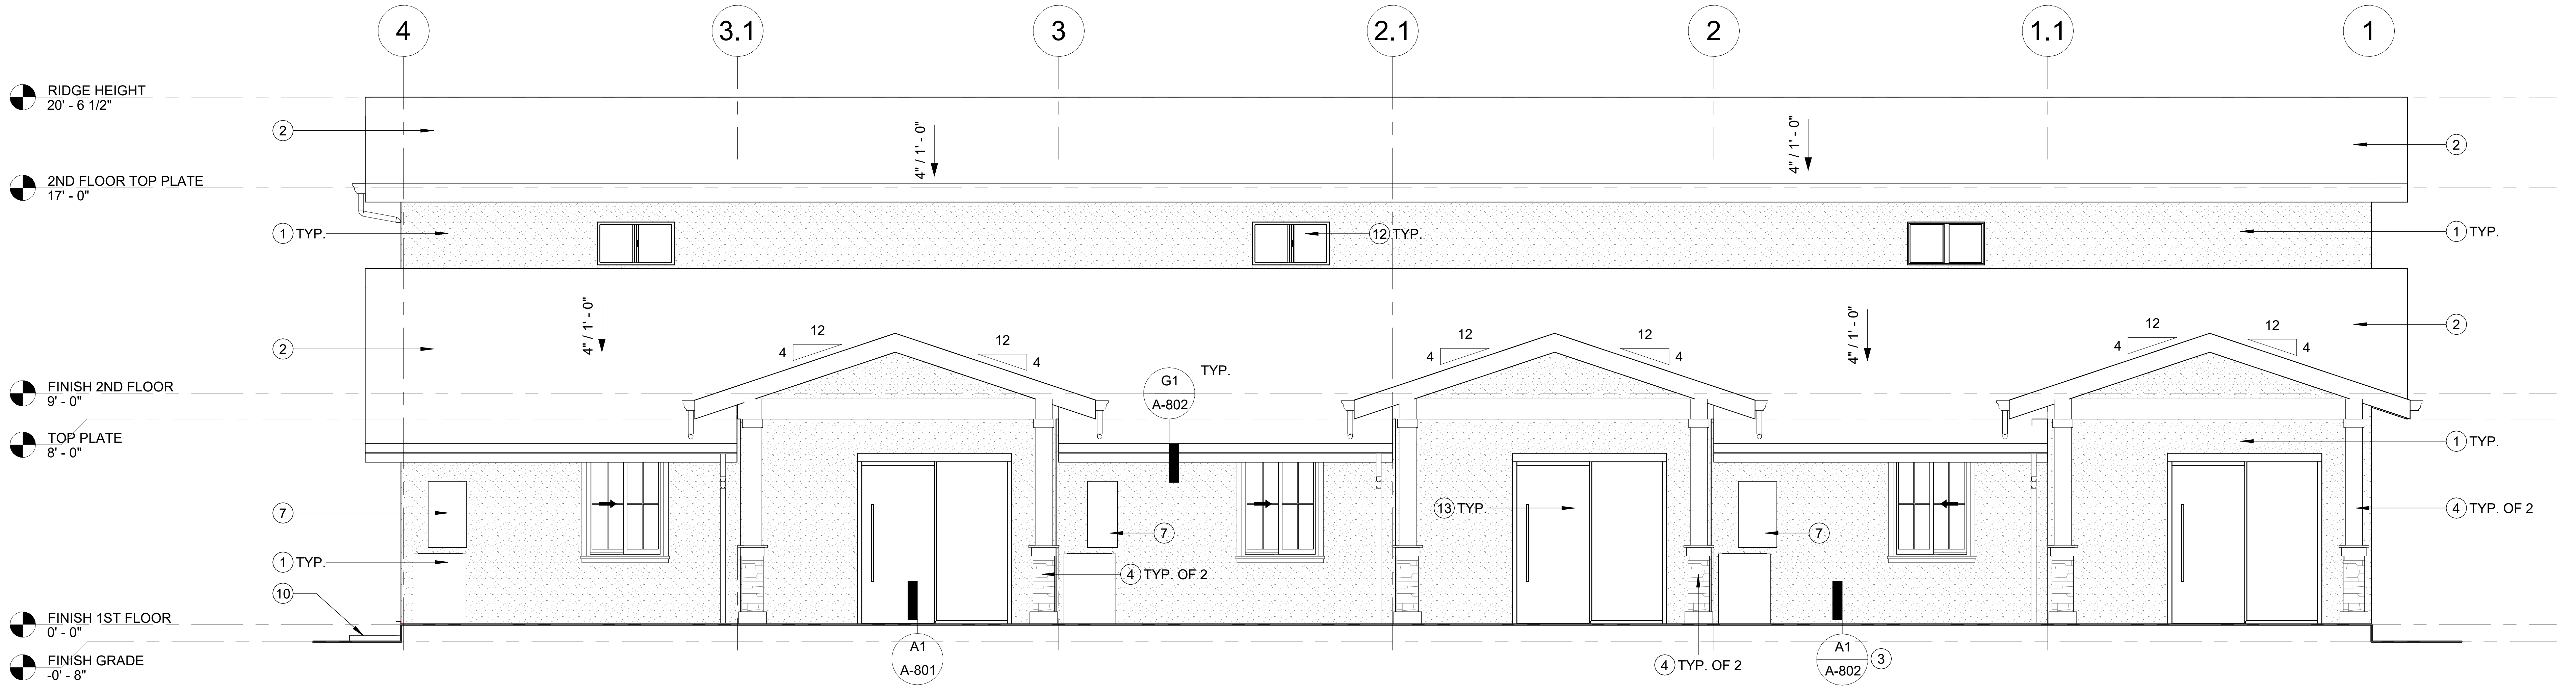

REAR ELEVATION D2

1/4" = 1'-0"

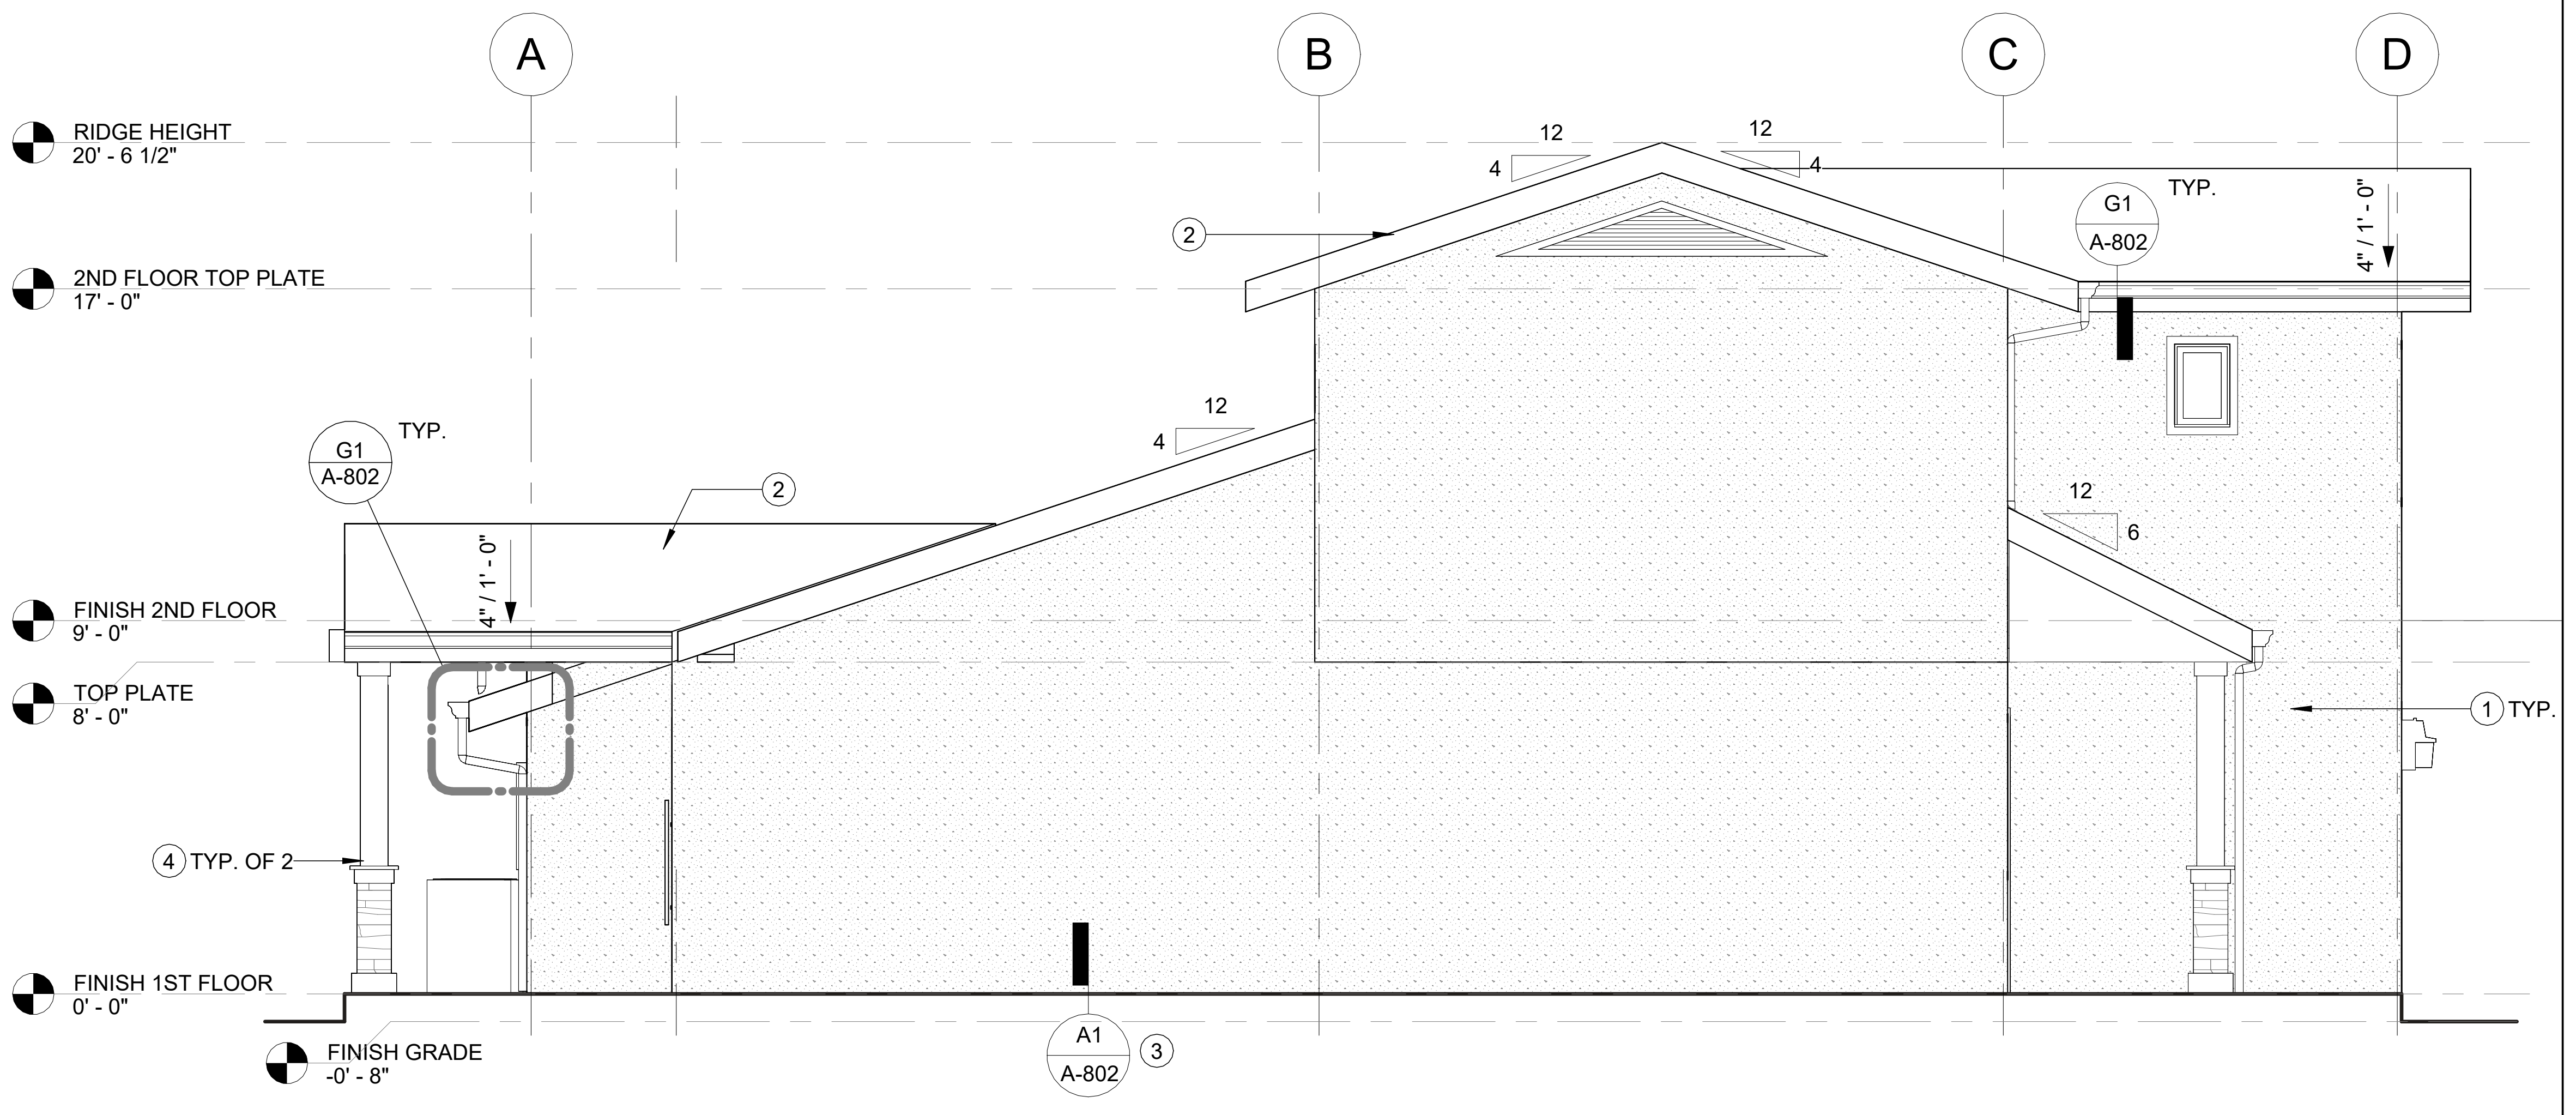

LEFT SIDE ELEVATION A6

1/4" = 1'-0"

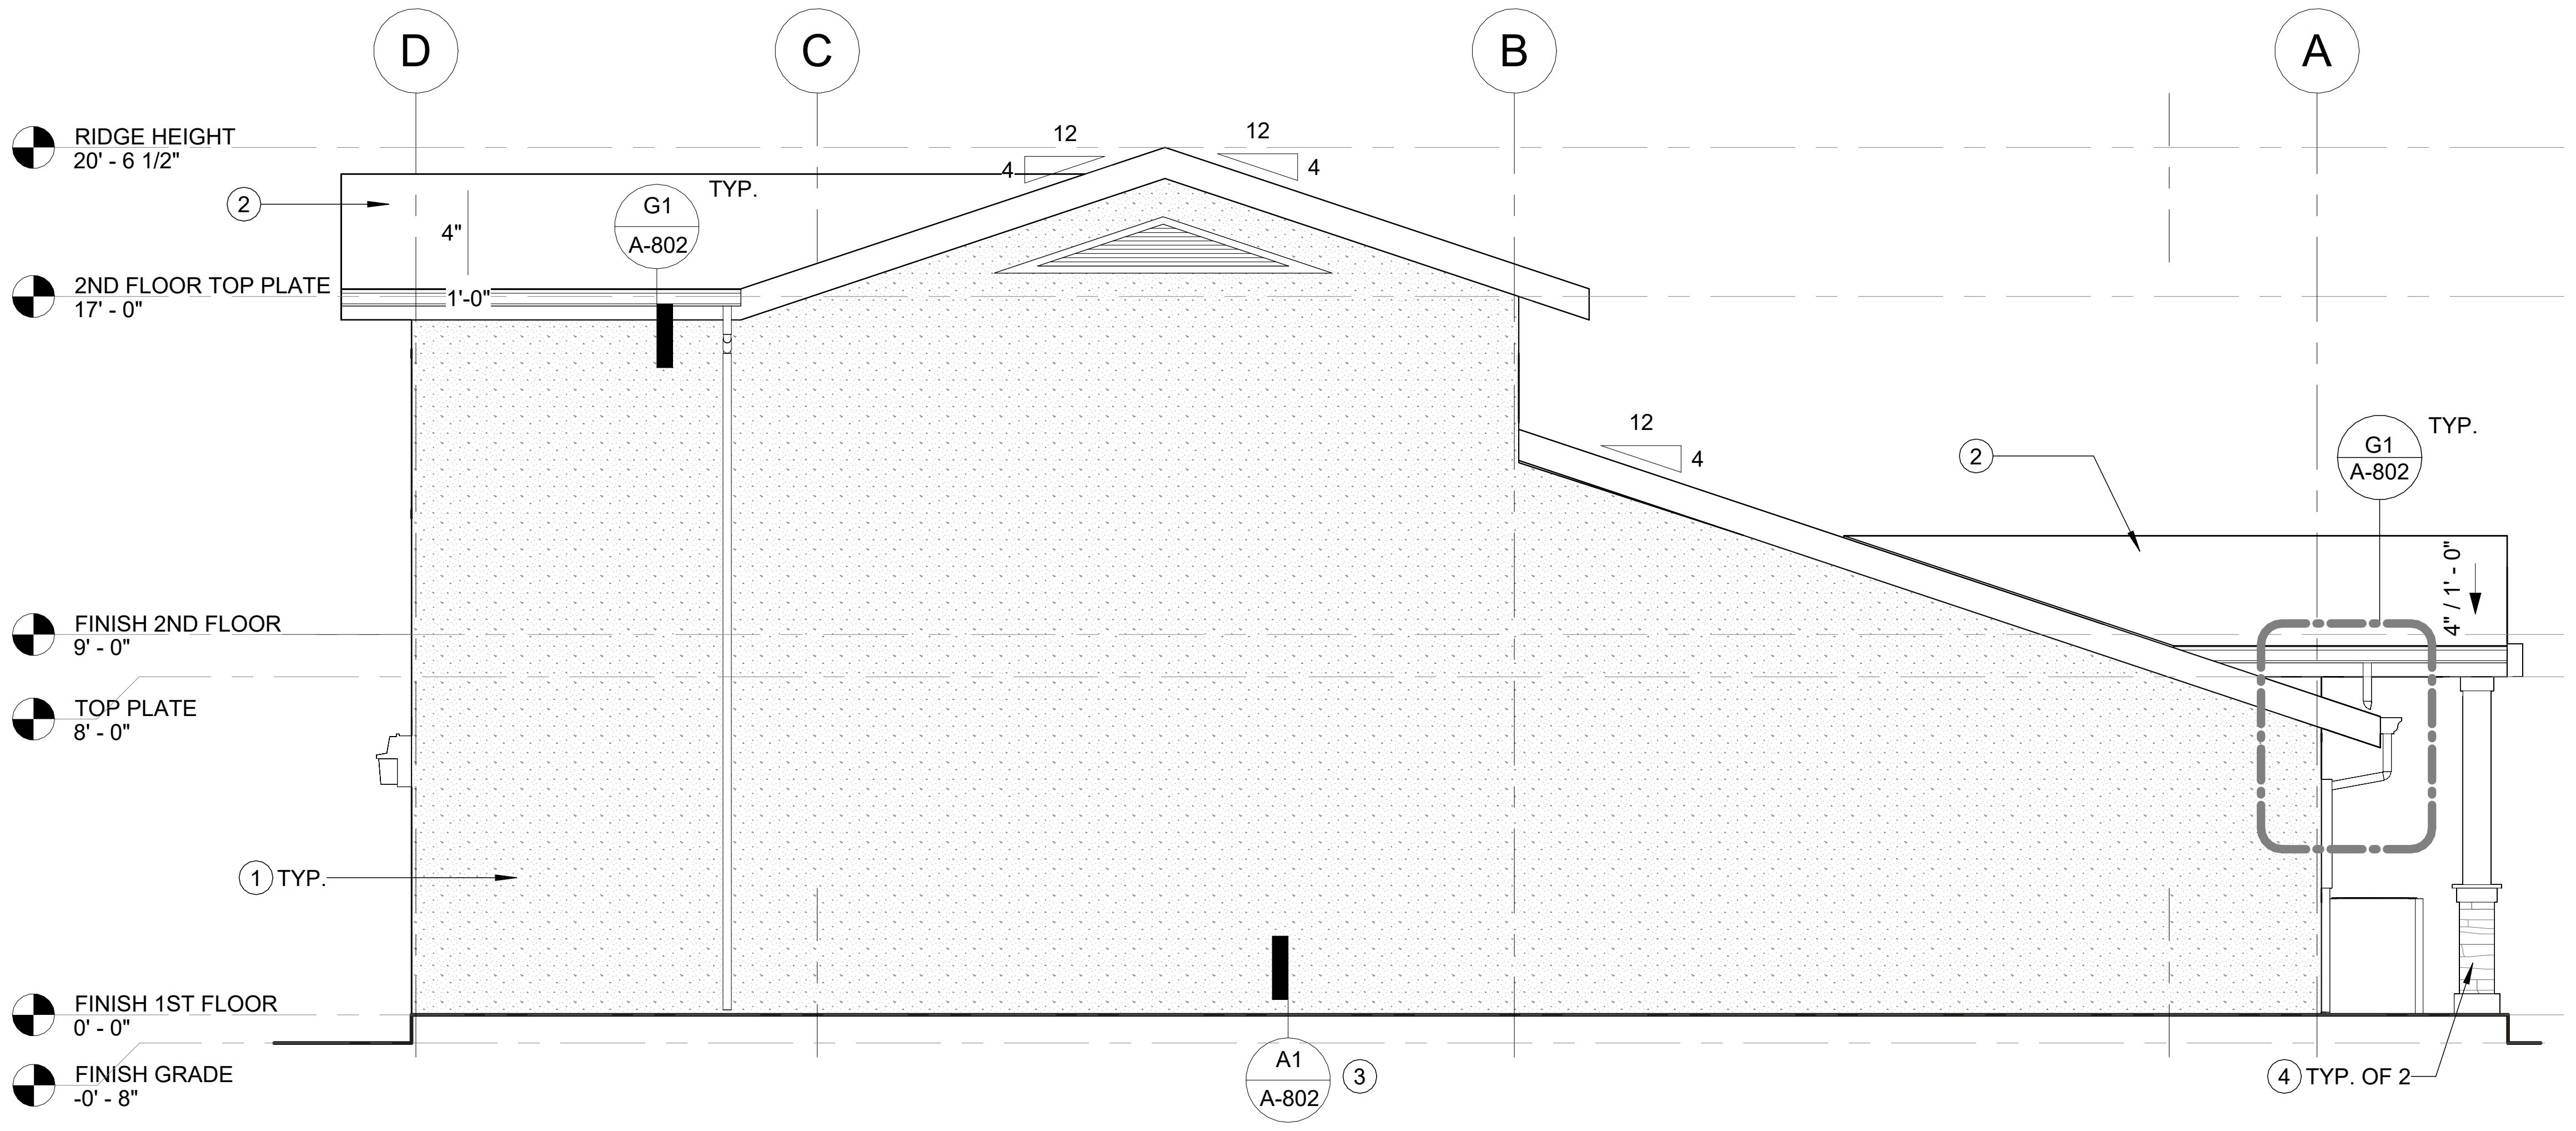

RIGHT SIDE ELEVATION A1

1/4" = 1'-0"

ELEVATION / SECTIONS KEYNOTES

1. 7/8" STUCCO FINISH OVER 2 LAYERS OF GRADE "D" PAPER INSTALLED OVER PLYWOOD SHEATHING (AS REQUIRED PER STRUCTURAL DRAWING). INSTALL METAL LATH OVER PLYWOOD SHEATHING PER R703.7.1. PROVIDE PERIMETER WEEP SCREED. REFER TO D1 / A-803 FOR ADDITIONAL INFORMATION.
   OPTIONAL FINISH: "JAMES HARDIE" BOARD AND BATTEN SIDING. REFER TO A-804 FOR ADDITIONAL INFORMATION.
2. 25 YEAR ASPHALT COMPOSITION ROOFING WITH MINIMUM CLASS "C" RATING OVER 30# FELT OVER PLYWOOD SHEATHING. REFER TO A4 / A-203 FOR ADDITIONAL INFORMATION.
   OPTION ROOF: GA. 24 STANDING SEAMLESS METAL ROOF.
3. PERIMETER WEEP SCREED. REFER TO A3 / A-802 , A4 / A-804 , F4 / A-804 FOR ADDITIONAL INFORMATION.
4. TREATED WOOD POST WITH OPTIONAL 2X WRAPPED POST OVER STUCCO FINISH AND VENEER STONE. REFER TO STRUCTURAL DRAWINGS AND A6 / A-802 FOR ADDITIONAL INFORMATION.
5. ENGINEERED ROOF TRUSS AND PLYWOOD SHEATHING.
6. CONCRETE PATIO/LANDING. SLOPED AT 2% MAXIMUM AWAY FRO THE BUILDING.
7. **R-21** MINIMUM FIBERGLASS BATTS WALL INSULATION. TYPICAL ON ALL EXTERIOR WALL.
8. **R-38** MINIMUM FIBERGLASS BATT INSULATION. TYPICAL ON ATTIC.
9. **R-19** MINIMUM BATT INSULATION. TYPICAL AT FRAME CAVITY OF ROOF.
10. 11" X 24" CONCRETE BACK SPLASH. PROVIDE ONE PER DOWNSPOUT. POSITION TO DRAIN AWAY FROM THE BUILDING.
11. CONCRETE FOOTING / FOUNDATION. REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
12. DUAL GLAZED WINDOW. REFER TO A2 / A-202 & A8 / A-202FOR ADDITIONAL INFORMATION.
13. DOOR. SEE A2 / A-202 & A8 / A-202 FOR ADDITIONAL INFORMATION.
14. SERVICE PANEL. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
15. ATTIC MOUNTED FURNACE. CLEAR HEADROOM OF NOT LESS THAN 30" SHALL BE PROVIDED IN THE ATTIC SPACE AT OR ABOVE THE ACCESS OPENING. ATTICS CONTAINING APPLIANCES SHALL BE PROVIDED WITH AN OPENING AND A CLEAR AND UNOBSTRUCTED PASSAGEWAY LARGE ENOUGH TO ALLOW REMOVAL OF THE LARGEST APPLIANCE, BUT NOT LESS THAN 30 INCHES HIGH AND 22 INCHES WIDE AND NOT MORE THAN 20 FEET LONG MEASURED ALONG THE CENTERLINE OF THE PASSAGEWAY FROM THE OPENING TO THE APPLIANCE. THE PASSAGEWAY SHALL HAVE CONTINUOUS SOLID FLOORING IN ACCORDANCE SHALL NOT LESS THAN 24 INCHES WIDE. A LEVEL SERVICE SPACE NOT LESS THAN 30 INCHES DEEP AND 30 INCHES WIDE SHALL BE PRESENT ALONG ALL SIDES OF THE APPLIANCE WHERE ACCESS IS REQUIRED. THE CLEAR ACCESS OPENING DIMENSIONS SHALL BE NOT LESS THAN OF 20 INCHES BY 30 INCHES , AND LARGE ENOUGH TO ALLOW REMOVAL OF THE LARGEST APPLIANCE. A PERMANENT 120-VOLT RECEPTACLE OUTLET AND LIGHTING FIXTURE SHALL BE INSTALLED NEAR THE APPLIANCE. THE SWITCH CONTROLLING THE LIGHTING FIXTURE SHALL BE LOCATED AT THE ENTRANCE TO THE PASSAGEWAY. REFER T0 D9 / A-803 & G9 / A-803 FOR ADDITIONAL INFORMATION.
16. PROVIDE MINIMUM OF 5/8" TYPE "X" GYP BOARD OR EQUIVALENT SEPARATION BETWEEN HABITABLE ROOMS ABOVE THE GARAGE.
17. 5/8" TYPE X GYPSUM BOARD ATTACHED TO EACH SIDE OF RIM BOARD WITH 1-1/2-INCH TYPE W DRYWALL SCREWS SPACED @ 12" O.C. PER APA FIRE RATED ASSEMBLIES PR-S238, ASSEMBLY RB2. TYPICAL BETWEEN UNIT APARTMENT SEPARATION. REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.

TRIPLEX DWELLING UNIT

OPTION #1

PROJECT

TRIPLEX
DWELLING UNIT

PWP23-005

DEPARTMENT OF PUBLIC WORKS AND PLANNING

CAPITAL PROJECTS DIVISION

2220 Tulare St., Ste. 720, Fresno, CA. 93721
Phone: (559) 262-4212 Fax: (559) 262-4879

SEAL & SIGNATURE

ROBINA R. WRIGHT
NO. C-32283
RENEWAL DATE
06/30/2025

UPDATE

MARCH 5, 2024

TITLE

ELEVATIONS

SCALE 1/4" = 1'-0"

A-301

ISSUE DATE MARCH 28, 2023	JOB NUMBER 2023_12
DRAWN BY Author	CHECKED BY Checker

©

3/5/2024 12:09:40 PM
24" X 36"

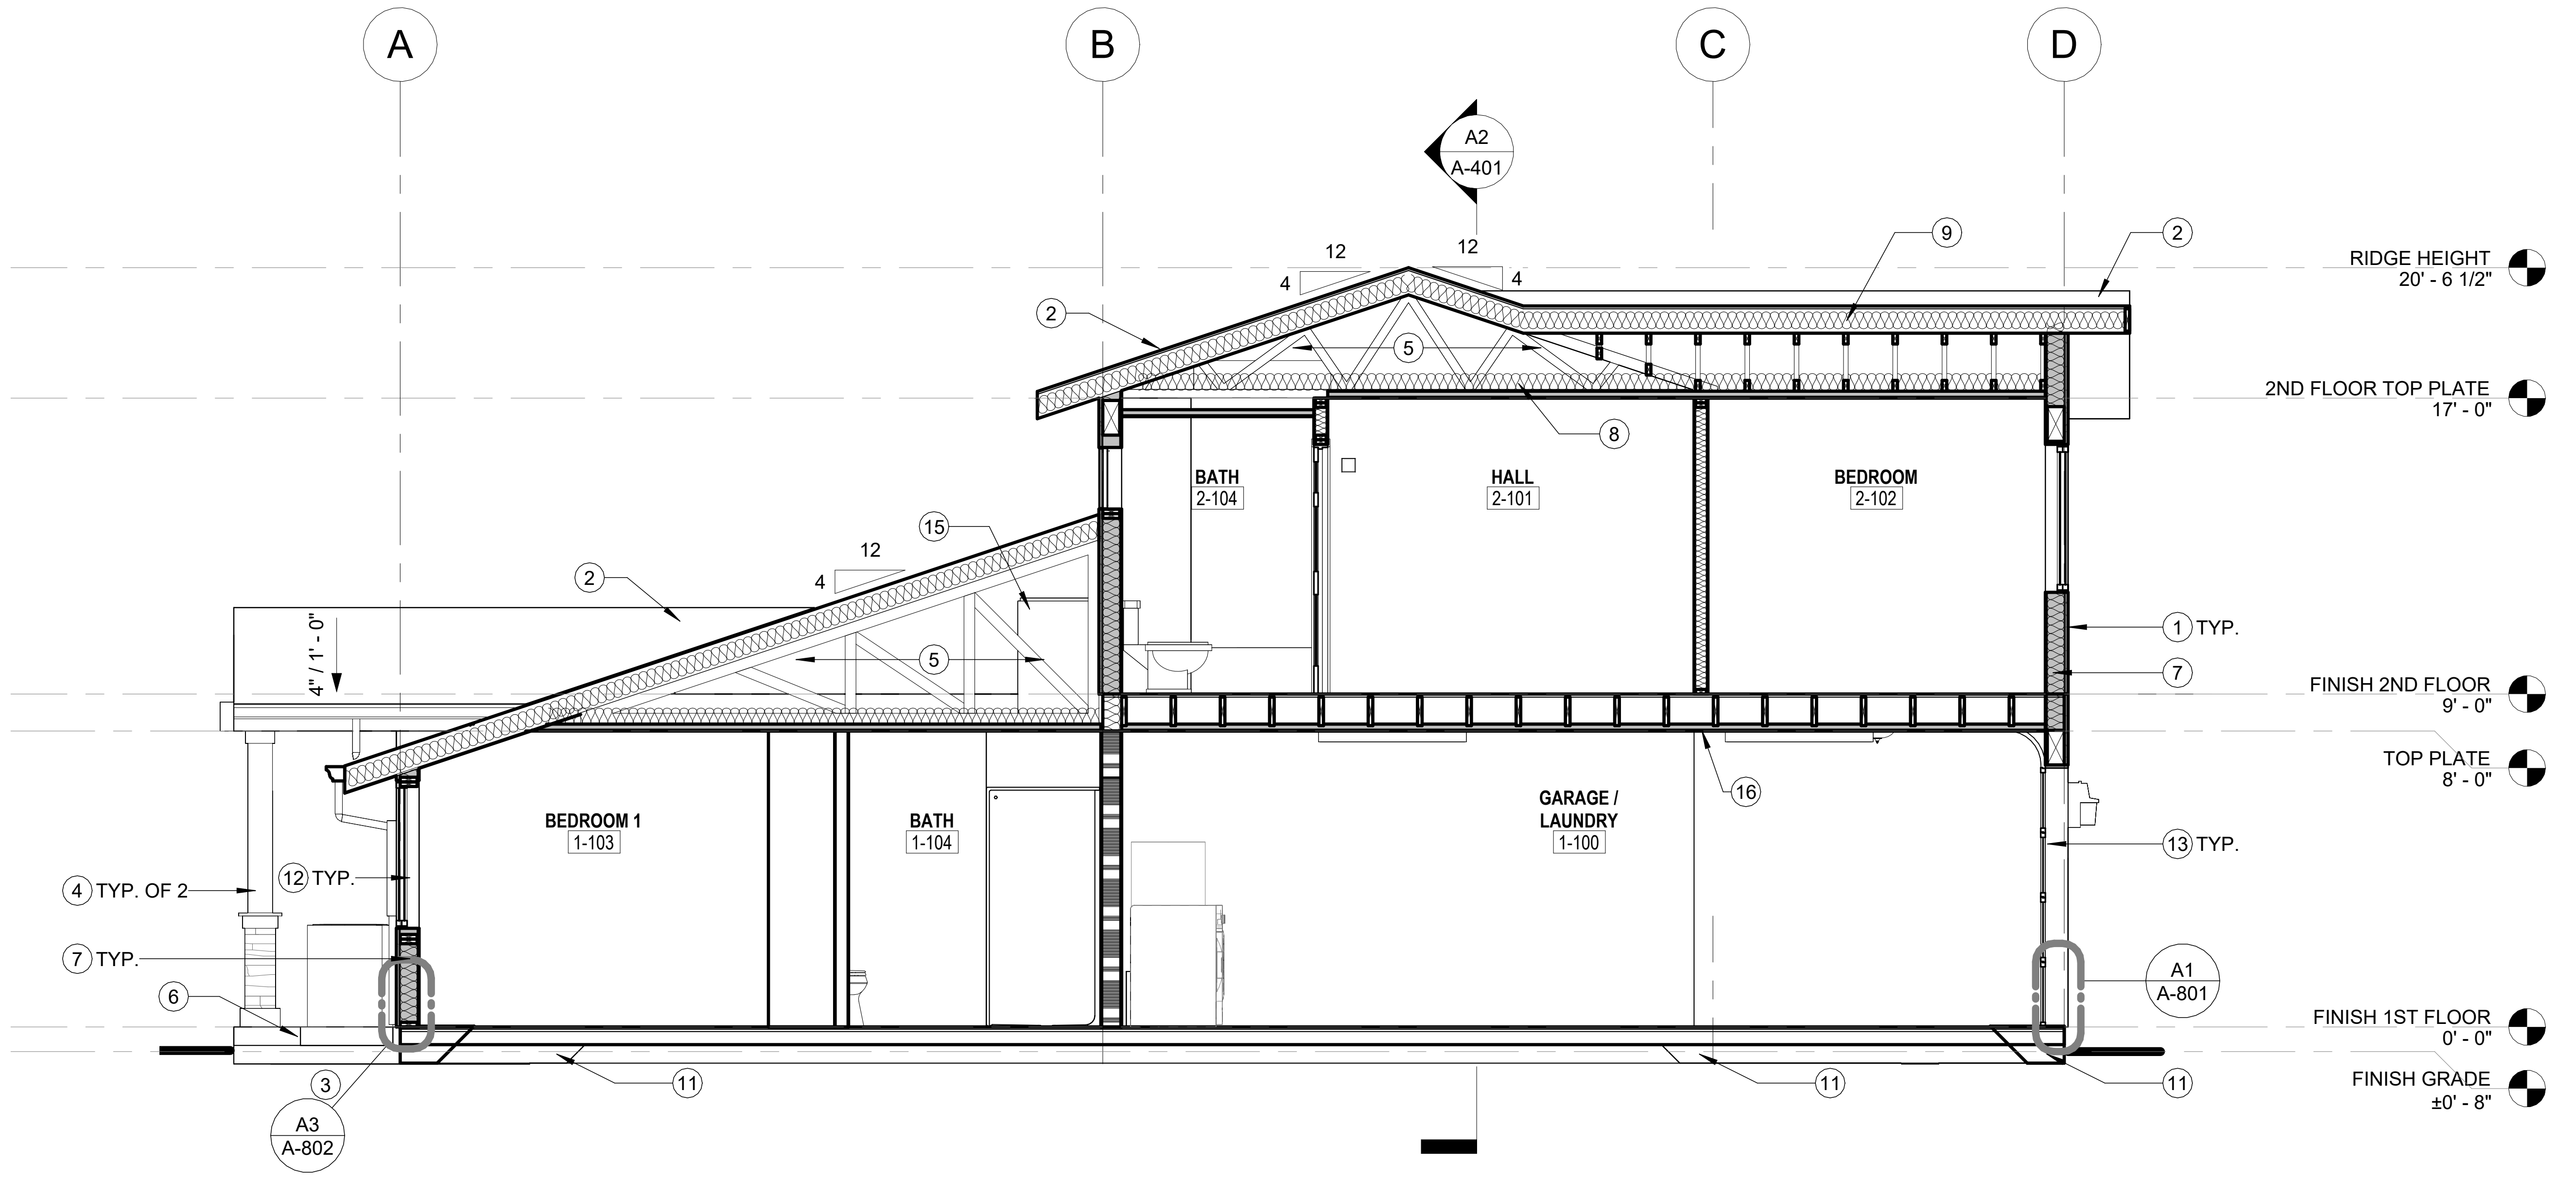

SECTION 1 **E5**

1/4" = 1'-0"

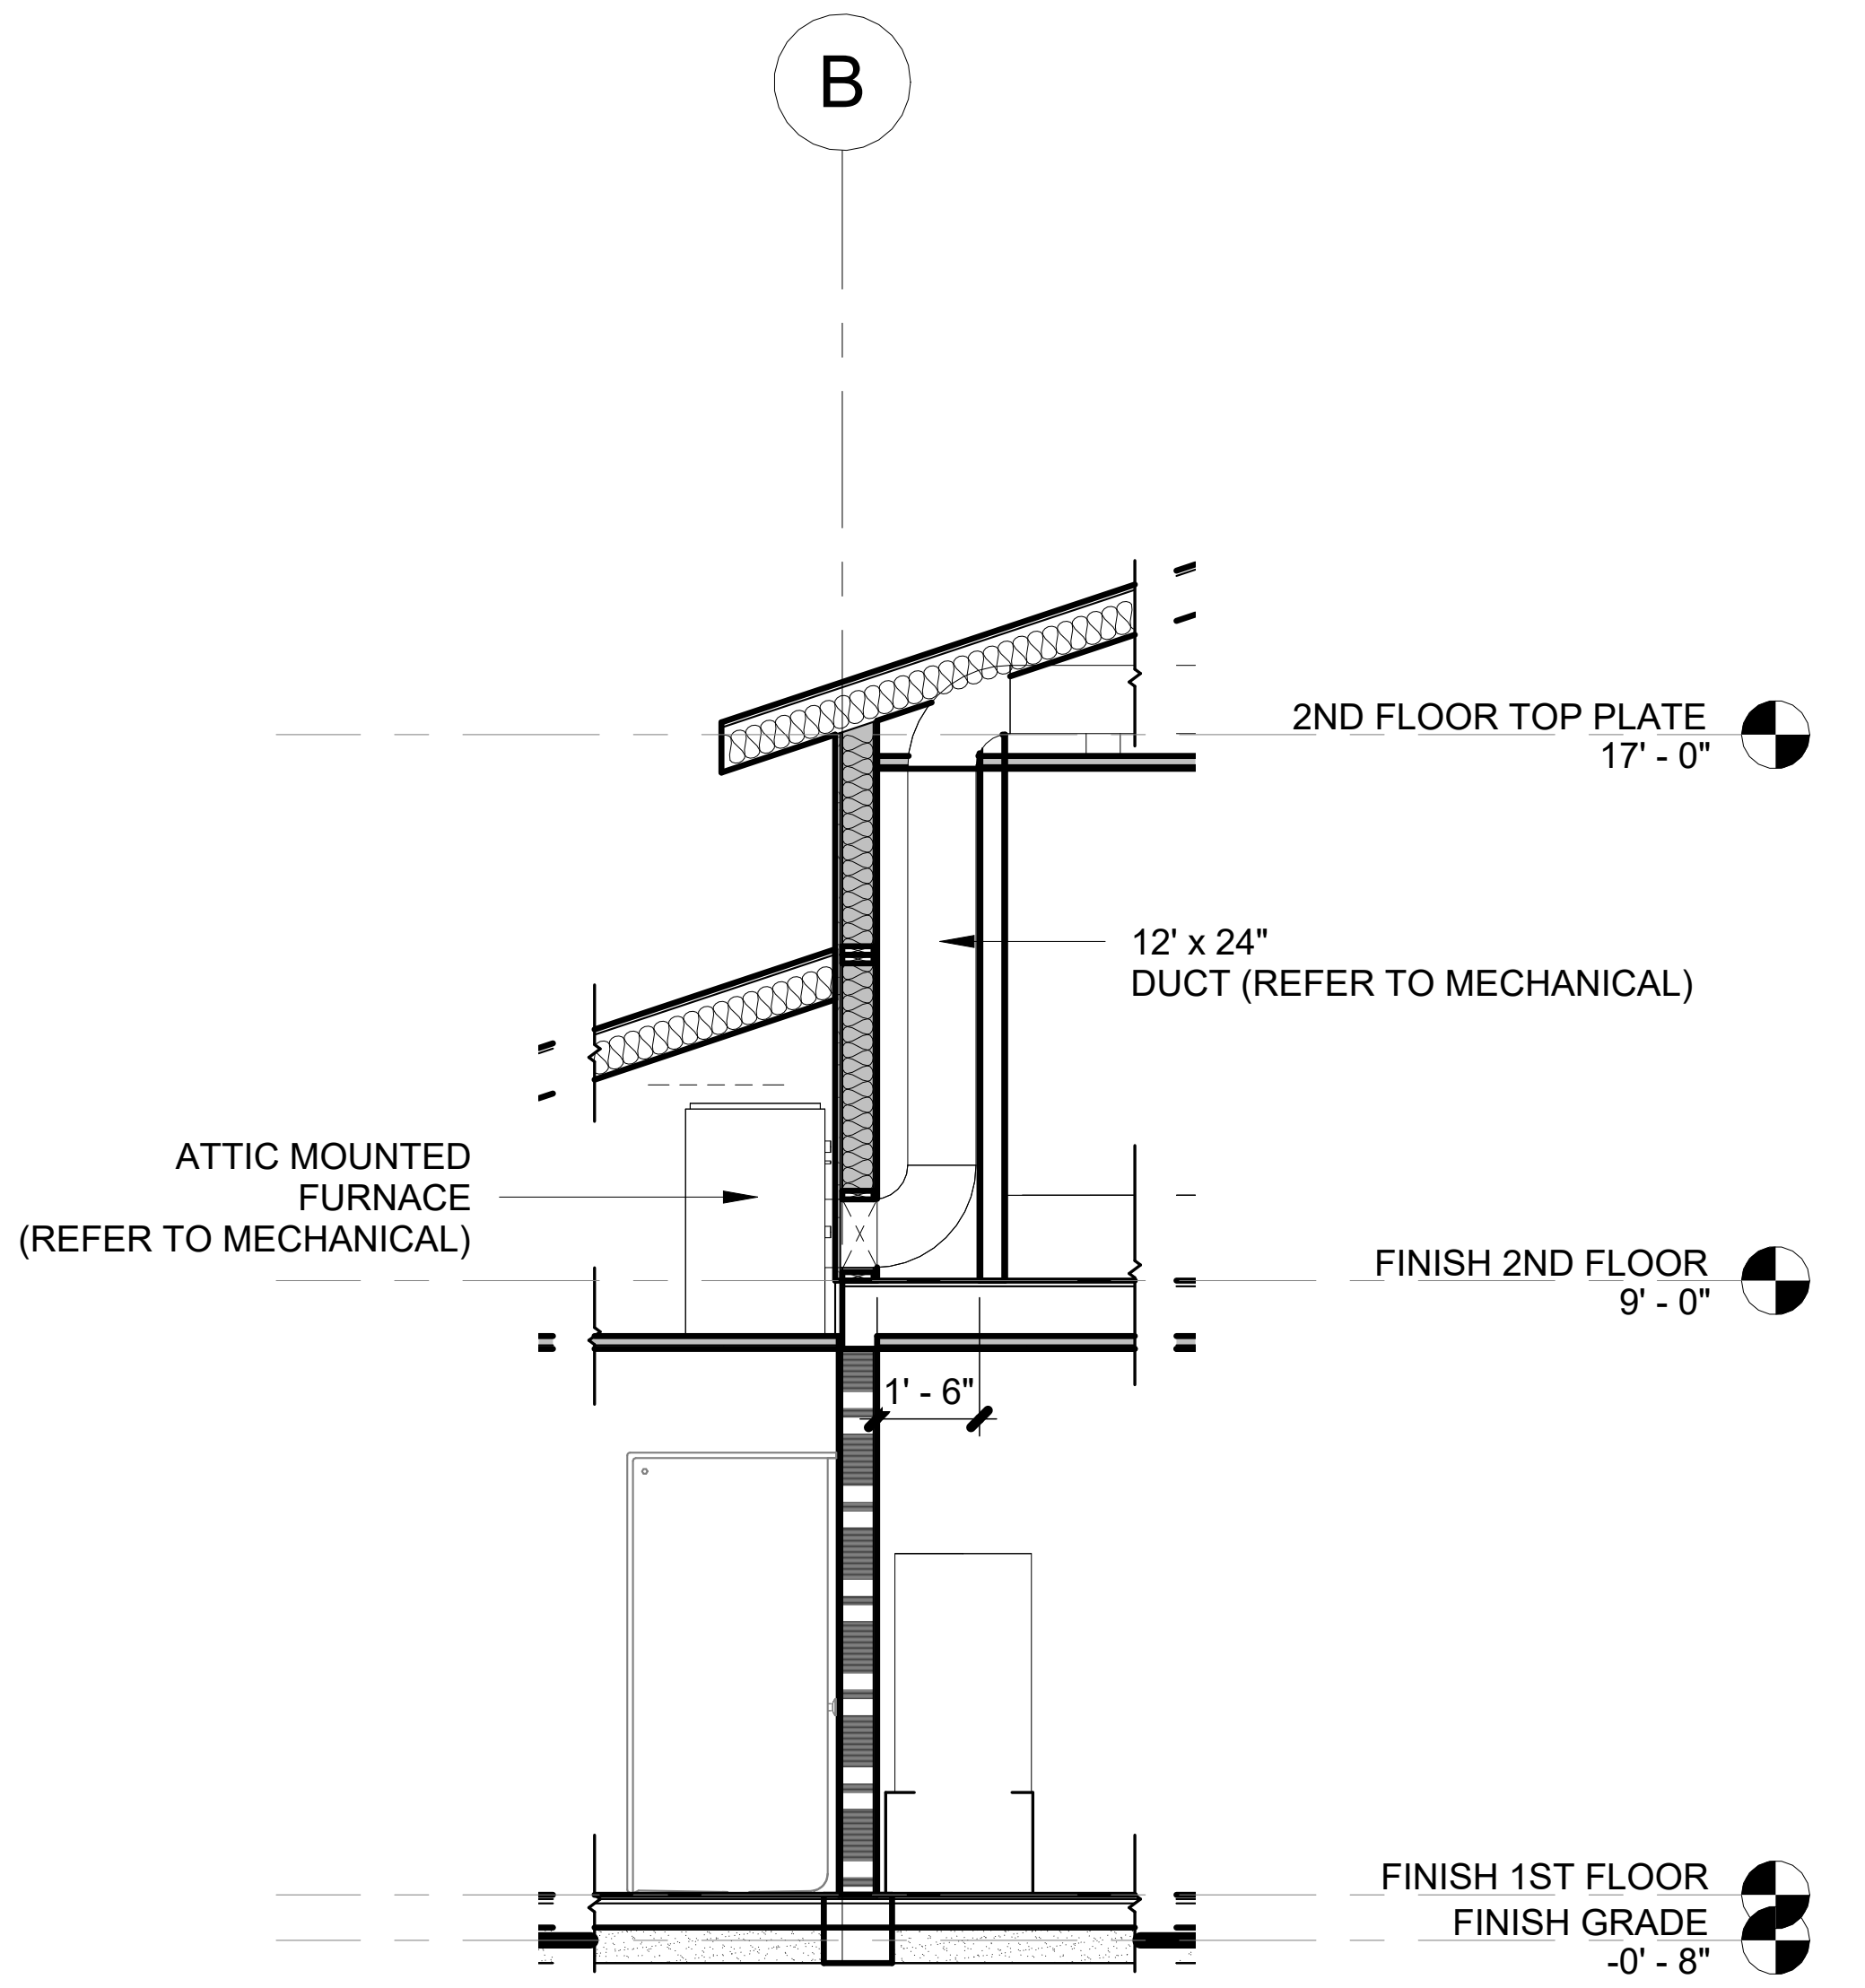

FURNACE TO 2ND FLOOR CONNECTION **E2**

1/4" = 1'-0"

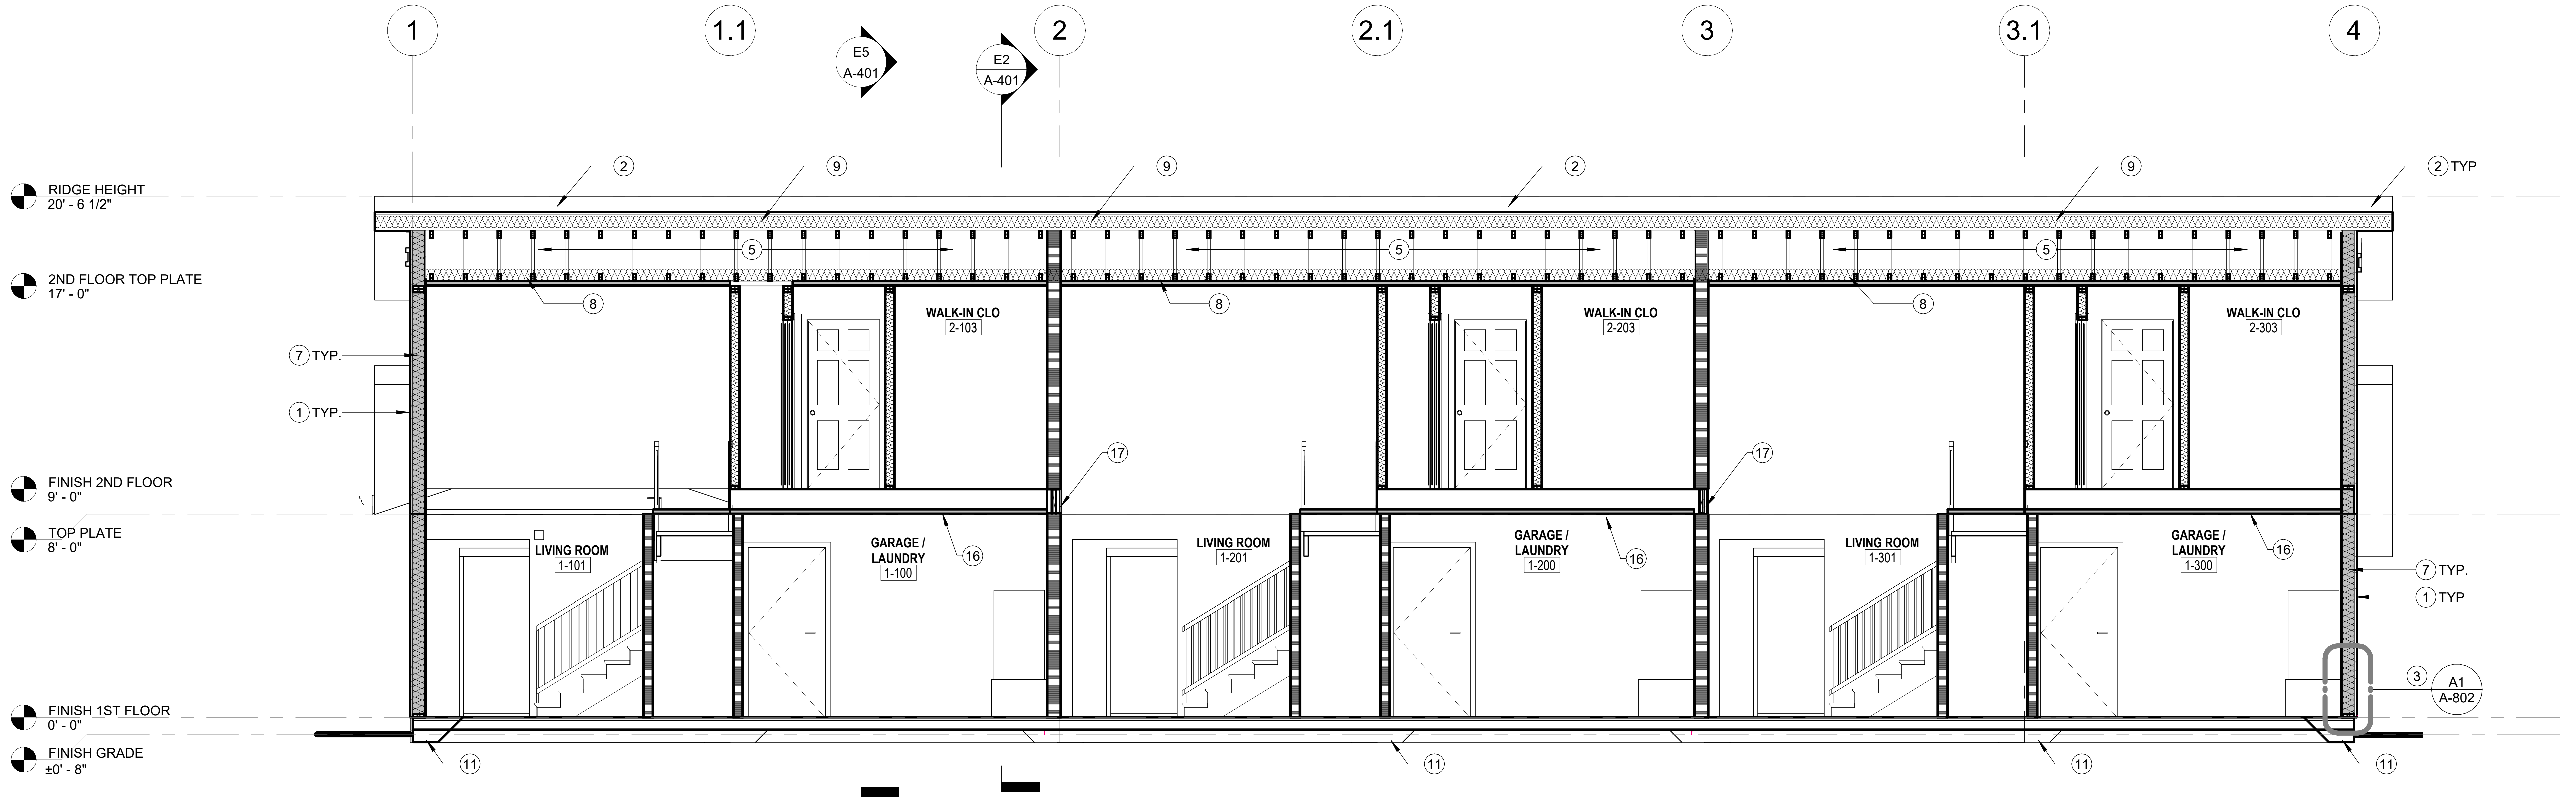

SECTION 2 **A2**

1/4" = 1'-0"

3/5/2024 12:09:42 PM
24" X 36"

ELEVATION / SECTIONS KEYNOTES

1. 7/8" STUCCO FINISH OVER 2 LAYERS OF GRADE "D" PAPER INSTALLED OVER PLYWOOD SHEATHING (AS REQUIRED PER STRUCTURAL DRAWING). INSTALL METAL LATH OVER PLYWOOD SHEATHING PER R703.7.1. PROVIDE PERIMETER WEEP SCREED. REFER TO D1 / A-803 FOR ADDITIONAL INFORMATION.
   OPTIONAL FINISH: "JAMES HARDIE" BOARD AND BATTEN SIDING. REFER TO A-804 FOR ADDITIONAL INFORMATION.
2. 25 YEAR ASPHALT COMPOSITION ROOFING WITH MINIMUM CLASS "C" RATING OVER 30# FELT OVER PLYWOOD SHEATHING. REFER TO A4 / A-203 FOR ADDITIONAL INFORMATION.
   OPTION ROOF: GA. 24 STANDING SEAMLESS METAL ROOF.
3. PERIMETER WEEP SCREED. REFER TO A3 / A-802 , A4 / A-804 , F4 / A-804 FOR ADDITIONAL INFORMATION.
4. TREATED WOOD POST WITH OPTIONAL 2X WRAPPED POST OVER STUCCO FINISH AND VENEER STONE. REFER TO STRUCTURAL DRAWINGS AND A6 / A-802 FOR ADDITIONAL INFORMATION.
5. ENGINEERED ROOF TRUSS AND PLYWOOD SHEATHING.
6. CONCRETE PATIO/LANDING. SLOPED AT 2% MAXIMUM AWAY FRO THE BUILDING.
7. **R-21** MINIMUM FIBERGLASS BATTS WALL INSULATION. TYPICAL ON ALL EXTERIOR WALL.
8. **R-38** MINIMUM FIBERGLASS BATT INSULATION. TYPICAL ON ATTIC.
9. **R-19** MINIMUM BATT INSULATION. TYPICAL AT FRAME CAVITY OF ROOF.
10. 11" X 24" CONCRETE BACK SPLASH. PROVIDE ONE PER DOWNSPOUT. POSITION TO DRAIN AWAY FROM THE BUILDING.
11. CONCRETE FOOTING / FOUNDATION. REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.
12. DUAL GLAZED WINDOW. REFER TO A2 / A-202 & A8 / A-202 FOR ADDITIONAL INFORMATION.
13. DOOR. SEE A2 / A-202 & A8 / A-202 FOR ADDITIONAL INFORMATION.
14. SERVICE PANEL. REFER TO ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION.
15. ATTIC MOUNTED FURNACE. CLEAR HEADROOM OF NOT LESS THAN 30" SHALL BE PROVIDED IN THE ATTIC SPACE AT OR ABOVE THE ACCESS OPENING. ATTICS CONTAINING APPLIANCES SHALL BE PROVIDED WITH AN OPENING AND A CLEAR AND UNOBSTRUCTED PASSAGEWAY LARGE ENOUGH TO ALLOW REMOVAL OF THE LARGEST APPLIANCE, BUT NOT LESS THAN 30 INCHES HIGH AND 22 INCHES WIDE AND NOT MORE THAN 20 FEET LONG MEASURED ALONG THE CENTERLINE OF THE PASSAGEWAY FROM THE OPENING TO THE APPLIANCE. THE PASSAGEWAY SHALL HAVE CONTINUOUS SOLID FLOORING IN ACCORDANCE SHALL NOT LESS THAN 24 INCHES WIDE. A LEVEL SERVICE SPACE NOT LESS THAN 30 INCHES DEEP AND 30 INCHES WIDE SHALL BE PRESENT ALONG ALL SIDES OF THE APPLIANCE WHERE ACCESS IS REQUIRED. THE CLEAR ACCESS OPENING DIMENSIONS SHALL BE NOT LESS THAN OF 20 INCHES BY 30 INCHES , AND LARGE ENOUGH TO ALLOW REMOVAL OF THE LARGEST APPLIANCE. A PERMANENT 120-VOLT RECEPTACLE OUTLET AND LIGHTING FIXTURE SHALL BE INSTALLED NEAR THE APPLIANCE. THE SWITCH CONTROLLING THE LIGHTING FIXTURE SHALL BE LOCATED AT THE ENTRANCE TO THE PASSAGEWAY. REFER T0 D9 / A-803 & G9 / A-803 FOR ADDITIONAL INFORMATION.
16. PROVIDE MINIMUM OF 5/8" TYPE "X" GYP BOARD OR EQUIVALENT SEPARATION BETWEEN HABITABLE ROOMS ABOVE THE GARAGE.
17. 5/8" TYPE X GYPSUM BOARD ATTACHED TO EACH SIDE OF RIM BOARD WITH 1-1/2-INCH TYPE W DRYWALL SCREWS SPACED @ 12" O.C. PER APA FIRE RATED ASSEMBLIES PR-S238, ASSEMBLY RB2. TYPICAL BETWEEN UNIT APARTMENT SEPARATION. REFER TO STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION.

GENERAL ATTIC FURNACE NOTES:

A. PASSAGEWAY TO THE FURNACE SHALL BE UNOBSTRUCTED AND SHALL HAVE CONTINUOUS SOLID FLOORING NOT LESS THAN 24 INCHES (610MM) WIDE FROM THE ENTRANCE OPENING TO THE FURNACE.

B. A LEVEL WORKING PLATFORM NOT LESS THAN 30 INCHES (762MM) IN DEPTH AND 48 INCHES (1220MM) IN HEIGHT MUST BE PROVIDED IN FRONT OF THE ENTIRE FIREBOX SIDE OF THE FURNACE.

C. A PERMANENT ELECTRIC OUTLET AND LIGHTING FIXTURE SHALL BE PROVIDED AT THE FURNACE AND SHOULD BE CONTROLLED BY A SWITCH LOCATED AT THE REQUIRED ACCESS OPENING.

TRIPLEX DWELLING UNIT

OPTION
#1

PROJECT

TRIPLEX
DWELLING UNIT

PWP23-005

DEPARTMENT OF PUBLIC
WORKS AND PLANNING

CAPITAL PROJECTS
DIVISION

2220 Tulare St., Ste. 720, Fresno, CA. 93721
Phone: (559) 262-4212 Fax: (559) 262-4879

SEAL & SIGNATURE

ROBINA R. WRIGHT
NO. C-32283
RENEWAL DATE
06/30/2025

UPDATE

MARCH 5, 2024

TITLE

BUILDING SECTIONS

SCALE As indicated

A-401

ISSUE DATE MARCH 28, 2023	JOB NUMBER 2023_12
DRAWN BY Author	CHECKED BY Checker

©